
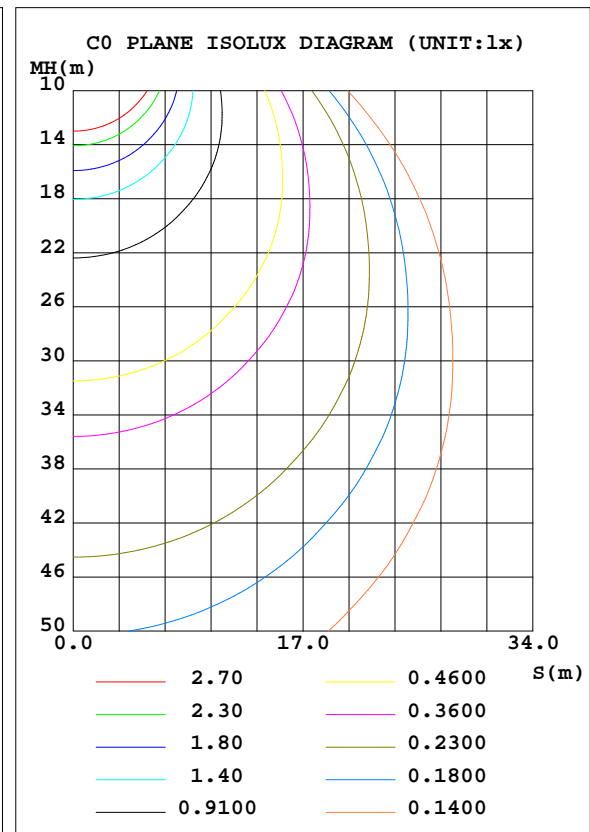


LUMINAIRE PHOTOMETRIC TEST REPORT

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-10W-SW-40	WEIGHT:
SPEC.:10W 4000K	DIM.: L:657mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 125.00 lm/W			
MODEL	BAWATY-10W-SW-40	Imax(cd)	456.0	S/MH(C0/180)	1.28
NOMINAL POWER(W)	10	LOR(%)	100.0	S/MH(C90/270)	1.29
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	1250.0	η UP, DN(C0-180)	0.1,49.8
NOMINAL FLUX(lm)	1250	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.1,50.0
LAMPS INSIDE	1	η up(%)	0.2	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	220	η down(%)	99.8	CIBSE SHR MAX	1.35

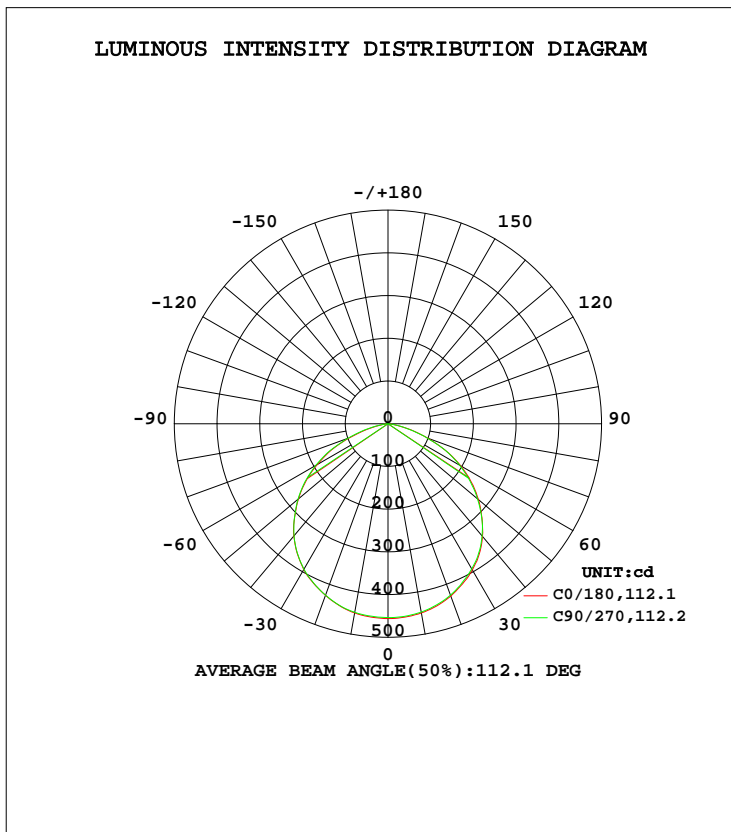

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	449.8	449.6	447.7	446.5	449.7	448.1	448.3	447.2	0- 10	43.07	43.07	3.45,3.45
20	429.3	429.0	427.1	425.6	427.6	427.3	427.2	426.9	10- 20	124.2	167.2	13.4,13.4
30	394.9	394.0	392.4	391.3	394.0	392.5	393.4	393.1	20- 30	190.0	357.2	28.6,28.6
40	344.3	342.6	342.7	339.9	342.9	340.9	342.5	342.9	30- 40	231.4	588.6	47.1,47.1
50	276.4	275.0	273.4	271.1	273.5	273.8	275.0	275.8	40- 50	238.4	827.0	66.2,66.2
60	196.1	196.6	193.5	190.9	191.2	194.0	195.1	198.6	50- 60	210.4	1037	83,83
70	99.97	100.0	97.20	96.09	95.53	97.81	100.2	103.8	60- 70	145.7	1183	94.7,94.7
80	18.59	19.41	18.91	18.45	17.54	20.16	19.53	22.52	70- 80	58.93	1242	99.4,99.4
90	0.0813	0.0431	0.0406	0.0495	0.0295	0.0294	0.1380	0.3921	80- 90	5.827	1248	99.8,99.8
100	0.0258	0.0356	0.0384	0.0332	0.0896	0.0894	0.0892	0.0792	90-100	0.0559	1248	99.8,99.8
110	0.0205	0.0302	0.0476	0.0381	0.2475	0.2276	0.2378	0.2284	100-110	0.1014	1248	99.8,99.8
120	0.1578	0.1578	0.1384	0.1279	0.3896	0.3693	0.3963	0.4063	110-120	0.1877	1248	99.9,99.9
130	0.3362	0.3165	0.3463	0.2669	0.4747	0.4089	0.4300	0.4358	120-130	0.2827	1249	99.9,99.9
140	0.6208	0.5438	0.6241	0.4850	0.5442	0.4552	0.5158	0.5148	130-140	0.3461	1249	99.9,99.9
150	0.7714	0.7814	0.7921	0.7323	0.6728	0.6134	0.7133	0.7127	140-150	0.3977	1249	99.9,99.9
160	0.8563	0.8606	0.8420	0.8313	0.8197	0.7894	0.8619	0.8216	150-160	0.3624	1250	100,100
170	0.9692	0.9890	1.030	0.9599	0.9099	0.9107	0.9496	0.9898	160-170	0.2517	1250	100,100
180	1.058	1.058	1.060	1.029	1.029	1.009	1.070	1.019	170-180	0.0958	1250	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 709.29 lm

%lum = 56.7%
%lamp = 56.7%

Conical surface Flux(120deg): 1037.5 lm

%lum = 83.0%
%lamp = 83.0%

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:24.5DEG
Operators:William
Test Date:2017-12-16


γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
Humidity:65.7%
Test Distance:26.000m [K=1.4470]
Remarks:

Checker: DENNY

Assessor: JOE

LUMINANCE LIMITATION CURVES

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-10W-SW-40	WEIGHT:
SPEC.:10W 4000K	DIM.: L:657mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

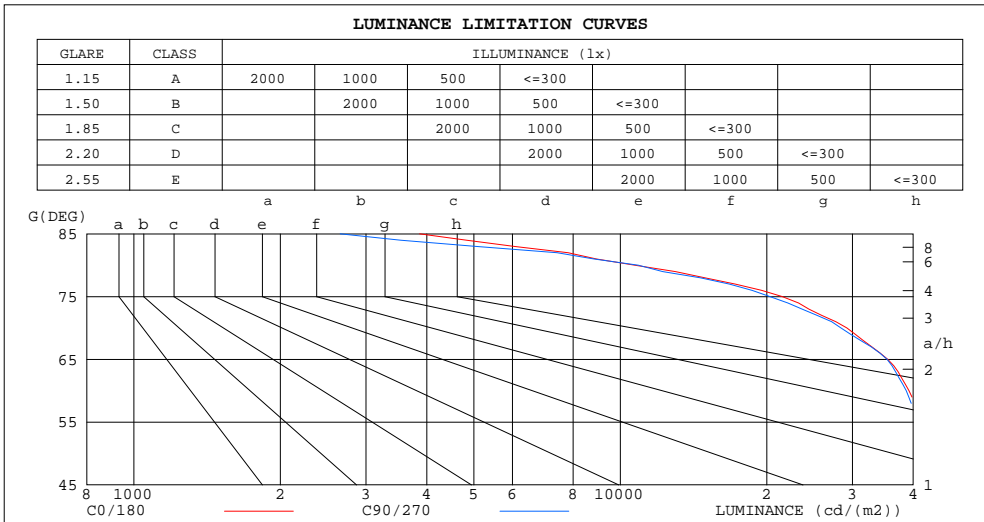

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	3868	2656
80	10704	10888
75	21518	20299
70	29228	28419
65	35455	35330
60	39211	38705
55	41511	40910
50	42999	42540
45	43982	43892

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:


Checker: DENNY

Assessor: JOE

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-10W-SW-40	WEIGHT:
SPEC.:10W 4000K	DIM.: L:657mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.05	1.01	.98	1.03	.99	.96	.99	.96	.93	.95	.92	.90	.91	.89	.88	.86
2.0	.92	.86	.80	.90	.84	.79	.87	.82	.78	.84	.79	.76	.81	.77	.74	.72
3.0	.81	.73	.67	.80	.72	.67	.77	.71	.65	.74	.69	.64	.71	.67	.63	.61
4.0	.72	.64	.57	.71	.63	.57	.68	.61	.56	.66	.60	.55	.64	.59	.54	.52
5.0	.64	.56	.49	.63	.55	.49	.61	.54	.48	.59	.53	.48	.57	.52	.47	.45
6.0	.58	.49	.43	.57	.49	.43	.55	.48	.42	.54	.47	.42	.52	.46	.42	.40
7.0	.53	.44	.38	.52	.44	.38	.50	.43	.37	.49	.42	.37	.47	.41	.37	.35
8.0	.48	.40	.34	.47	.39	.34	.46	.39	.33	.45	.38	.33	.44	.38	.33	.31
9.0	.44	.36	.30	.43	.36	.30	.42	.35	.30	.41	.35	.30	.40	.34	.30	.28
10.0	.41	.33	.28	.40	.33	.27	.39	.32	.27	.38	.32	.27	.37	.31	.27	.25

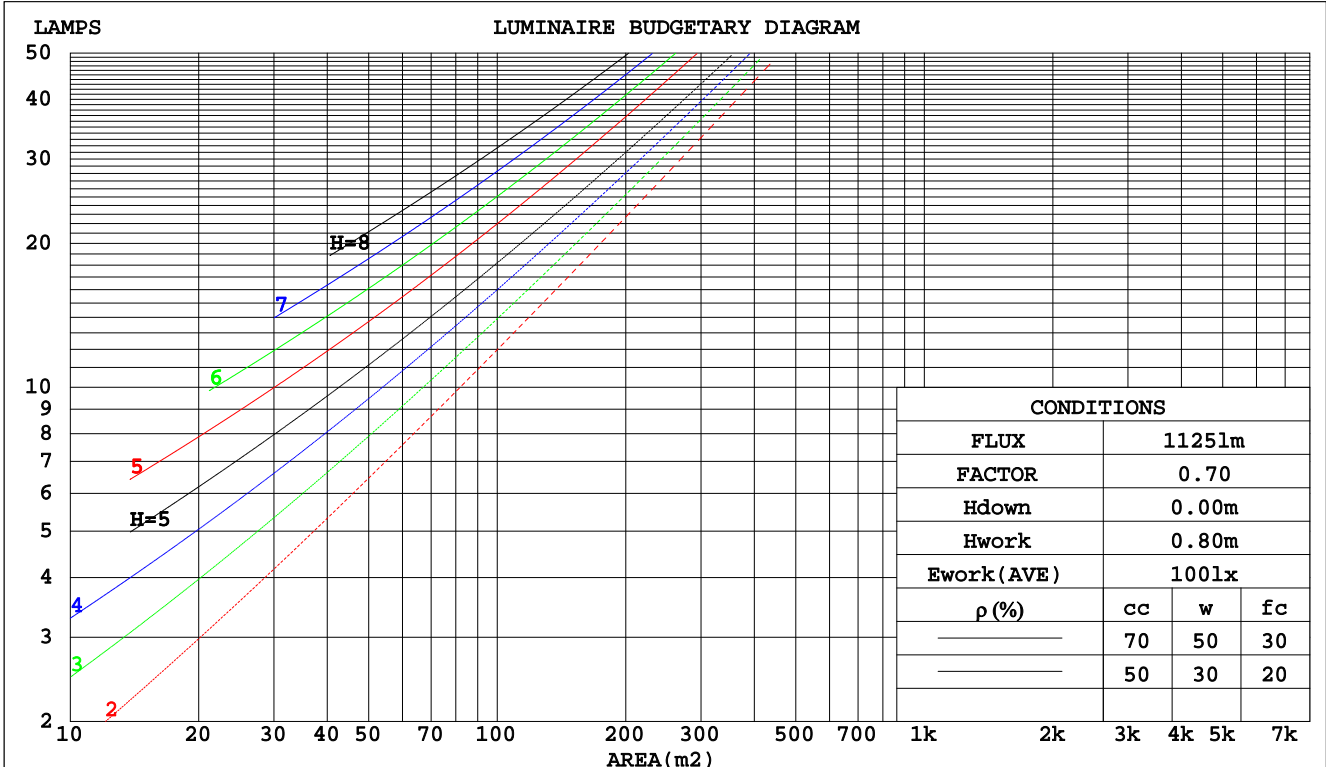

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

WEC AND CCEC

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-10W-SW-40	WEIGHT:
SPEC.:10W 4000K	DIM.: L:657mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.282	.161	.051	.275	.157	.050	.262	.150	.048	.250	.144	.046	.239	.138	.045	
2.0	.274	.150	.046	.267	.147	.045	.256	.142	.044	.245	.138	.043	.235	.133	.042	
3.0	.257	.137	.041	.252	.135	.041	.242	.131	.040	.232	.127	.039	.223	.124	.038	
4.0	.240	.125	.037	.235	.123	.036	.226	.120	.036	.218	.117	.035	.210	.114	.035	
5.0	.224	.114	.033	.219	.113	.033	.211	.110	.032	.204	.107	.032	.197	.105	.032	
6.0	.208	.105	.030	.205	.103	.030	.197	.101	.029	.191	.099	.029	.184	.097	.029	
7.0	.195	.096	.027	.191	.095	.027	.185	.093	.027	.179	.092	.027	.173	.090	.026	
8.0	.182	.089	.025	.179	.088	.025	.174	.087	.025	.168	.085	.025	.163	.084	.024	
9.0	.171	.083	.023	.169	.082	.023	.163	.081	.023	.159	.079	.023	.154	.078	.023	
10.0	.161	.077	.021	.159	.077	.021	.154	.076	.021	.150	.074	.021	.146	.073	.021	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.180	.158	.138	.154	.135	.119	.105	.093	.082	.061	.054	.048	.019	.017	.015	
2.0	.171	.133	.101	.147	.115	.088	.100	.079	.061	.058	.046	.036	.019	.015	.012	
3.0	.163	.116	.077	.140	.100	.067	.096	.069	.047	.056	.040	.028	.018	.013	.009	
4.0	.156	.102	.061	.134	.088	.053	.092	.061	.037	.053	.036	.022	.017	.012	.007	
5.0	.149	.092	.049	.128	.079	.043	.088	.055	.030	.051	.033	.018	.016	.011	.006	
6.0	.142	.083	.041	.122	.072	.036	.084	.050	.025	.049	.030	.015	.016	.010	.005	
7.0	.135	.076	.035	.116	.066	.031	.080	.046	.022	.047	.027	.013	.015	.009	.004	
8.0	.129	.071	.030	.111	.061	.027	.077	.043	.019	.045	.025	.011	.014	.008	.004	
9.0	.123	.066	.027	.106	.057	.023	.073	.040	.017	.043	.024	.010	.014	.008	.003	
10.0	.117	.061	.024	.101	.053	.021	.070	.037	.015	.041	.022	.009	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

UGR(Unified Glare Rating) Table

NAME: LED TRI-PROOF LIGHT		TYPE:BAWATY-10W-SW-40					WEIGHT:				
SPEC.:10W 4000K		DIM.: L:657mm					SERIAL No.:				
MFR.: DIMON TECHNOLOGY LTD		SUR.:					Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	Viewed crosswise					Viewed endwise					
x = 2H y = 2H	25.1	26.6	25.4	26.8	27.0	25.1	26.6	25.4	26.8	27.0	
3H	26.2	27.6	26.5	27.8	28.1	26.2	27.6	26.5	27.8	28.0	
4H	26.5	27.8	26.8	28.1	28.3	26.4	27.7	26.8	28.0	28.2	
6H	26.6	27.8	26.9	28.0	28.3	26.5	27.7	26.8	28.0	28.3	
8H	26.5	27.7	26.9	28.0	28.3	26.5	27.6	26.8	27.9	28.2	
12H	26.5	27.6	26.8	27.9	28.2	26.4	27.5	26.8	27.8	28.1	
4H 2H	25.6	26.9	25.9	27.2	27.4	25.6	26.9	25.9	27.2	27.4	
3H	26.9	28.0	27.2	28.3	28.6	26.8	28.0	27.2	28.3	28.6	
4H	27.2	28.3	27.6	28.6	28.9	27.2	28.2	27.5	28.5	28.8	
6H	27.3	28.2	27.7	28.6	29.0	27.3	28.2	27.7	28.5	28.9	
8H	27.3	28.2	27.7	28.5	28.9	27.2	28.1	27.7	28.4	28.8	
12H	27.3	28.0	27.7	28.4	28.8	27.2	28.0	27.6	28.4	28.8	
8H 4H	27.3	28.2	27.7	28.5	28.9	27.3	28.1	27.7	28.5	28.9	
6H	27.5	28.2	27.9	28.6	29.0	27.4	28.1	27.8	28.5	28.9	
8H	27.5	28.1	27.9	28.5	28.9	27.4	28.0	27.9	28.4	28.9	
12H	27.4	28.0	27.9	28.4	28.9	27.4	27.9	27.8	28.3	28.8	
12H 4H	27.3	28.1	27.7	28.4	28.9	27.2	28.0	27.7	28.4	28.8	
6H	27.4	28.1	27.9	28.5	28.9	27.4	28.0	27.8	28.4	28.9	
8H	27.4	28.0	27.9	28.4	28.9	27.4	27.9	27.9	28.3	28.8	
Variations with the observer position at spacings:											
S = 1.0H	+ 0.3 / - 0.3					+ 0.2 / - 0.3					
1.5H	+ 0.2 / - 0.4					+ 0.2 / - 0.4					
2.0H	+ 0.4 / - 0.4					+ 0.4 / - 0.4					

CIE Pub.117, 1250 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 0.8)

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

UTILIZATION FACTORS TABLE

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-10W-SW-40	WEIGHT:
SPEC.:10W 4000K	DIM.: L:657mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	59	47	40	58	47	40	57	46	40	34
0.80	69	58	50	68	57	50	66	56	50	43
1.00	78	67	60	76	66	60	74	68	59	52
1.25	85	75	68	83	74	68	81	73	67	60
1.50	90	80	74	88	80	73	85	78	72	65
2.00	97	89	83	95	87	82	91	85	80	73
2.50	100	93	87	98	92	87	95	89	85	77
3.00	104	97	92	101	96	91	98	93	89	81
4.00	107	102	98	105	100	97	101	97	94	85
5.00	110	105	102	107	103	100	103	100	97	88
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16


γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

ISOCANDELA DIAGRAM

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-10W-SW-40	WEIGHT:
SPEC.:10W 4000K	DIM.: L:657mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

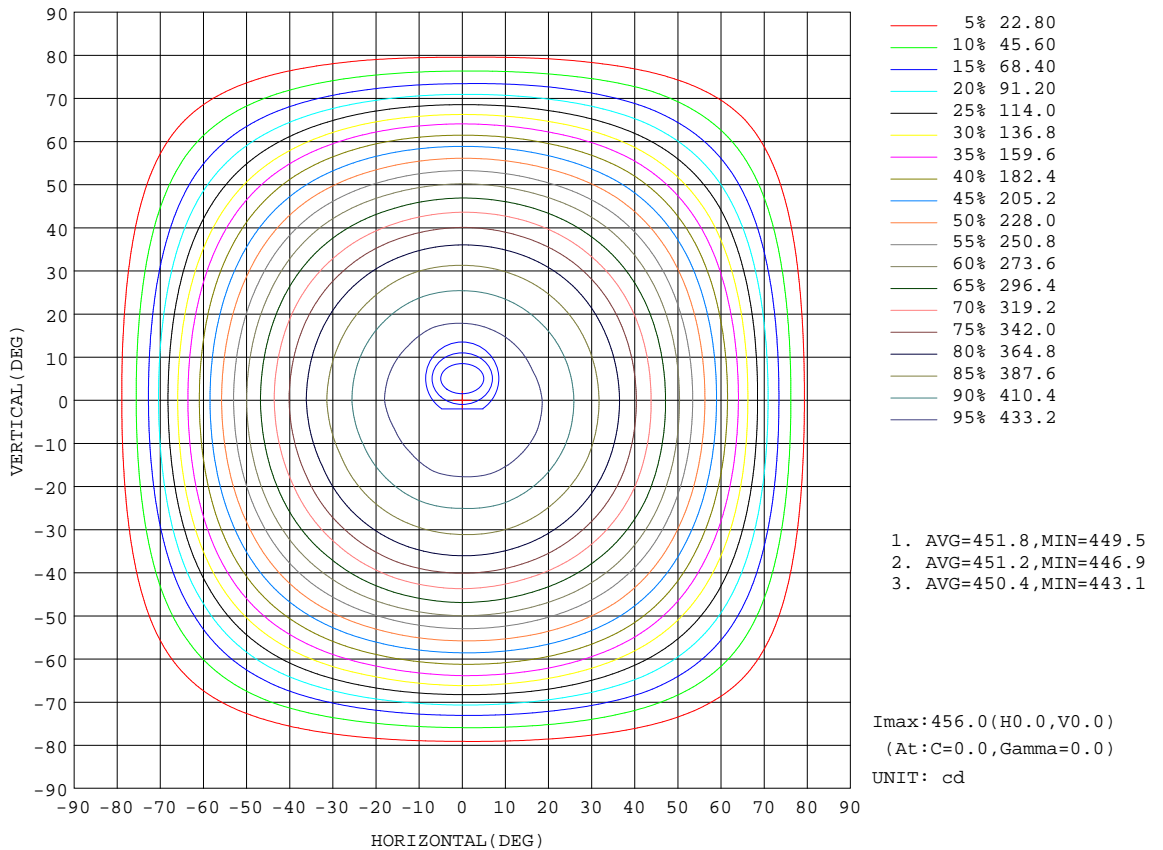

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 24.5DEG
 Operators: William
 Test Date: 2017-12-16


γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity: 65.7%
 Test Distance: 26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

AAI Figure

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-10W-SW-40	WEIGHT:
SPEC.:10W 4000K	DIM.: L:657mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

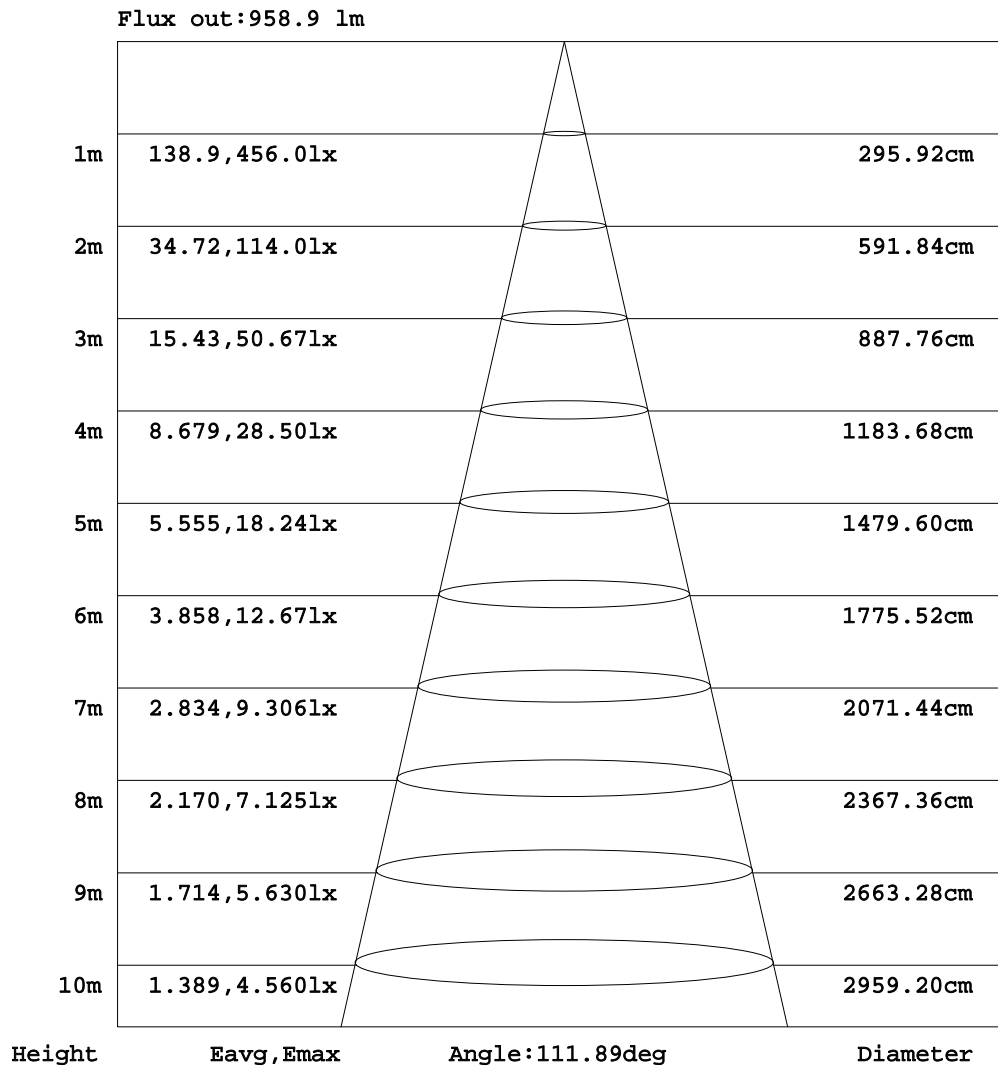

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16


γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

ISOLUX DIAGRAM

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-10W-SW-40	WEIGHT:
SPEC.:10W 4000K	DIM.: L:657mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

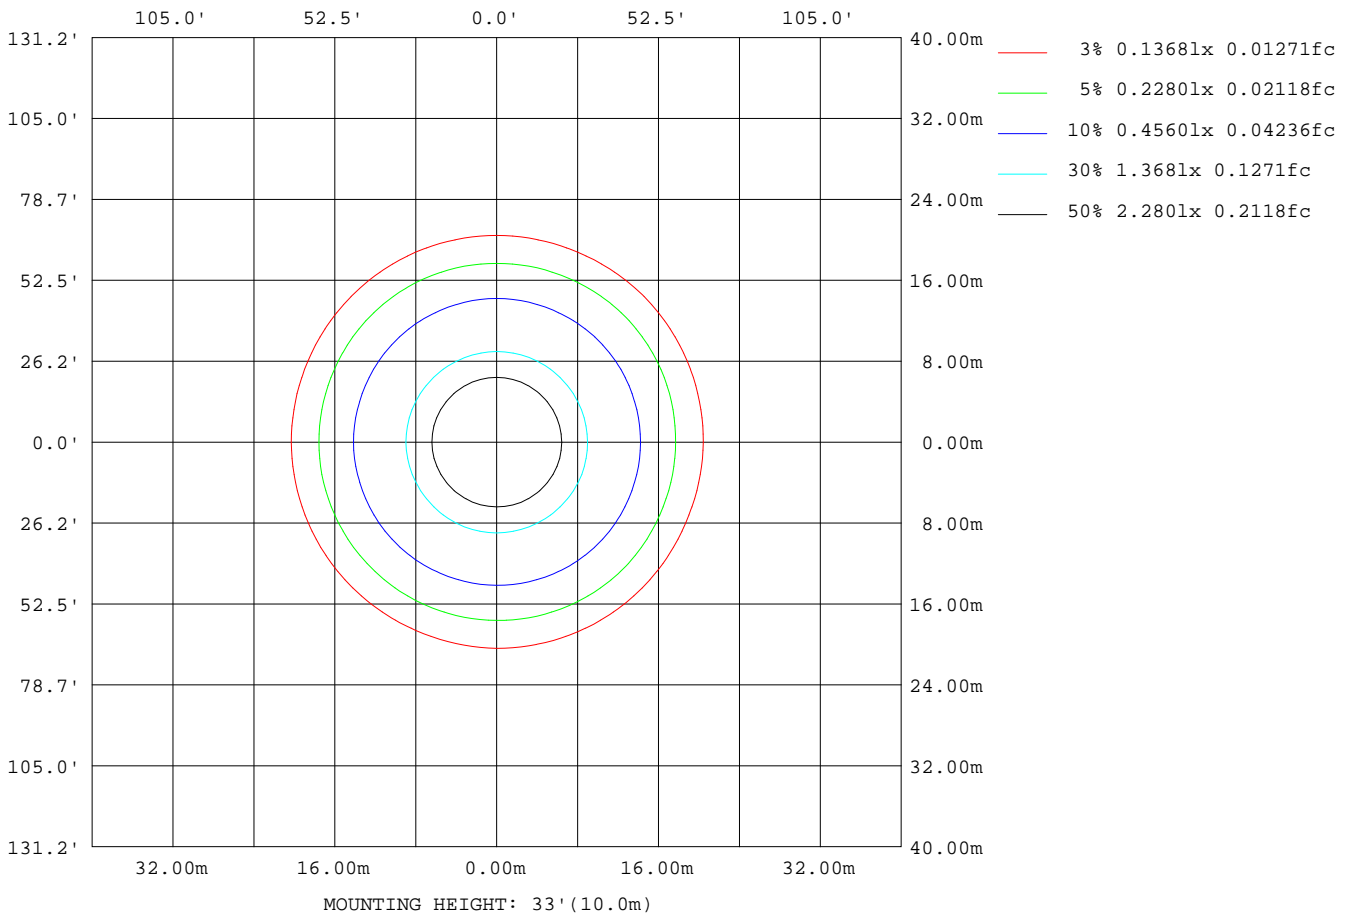


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

Planar Illuminance Curve

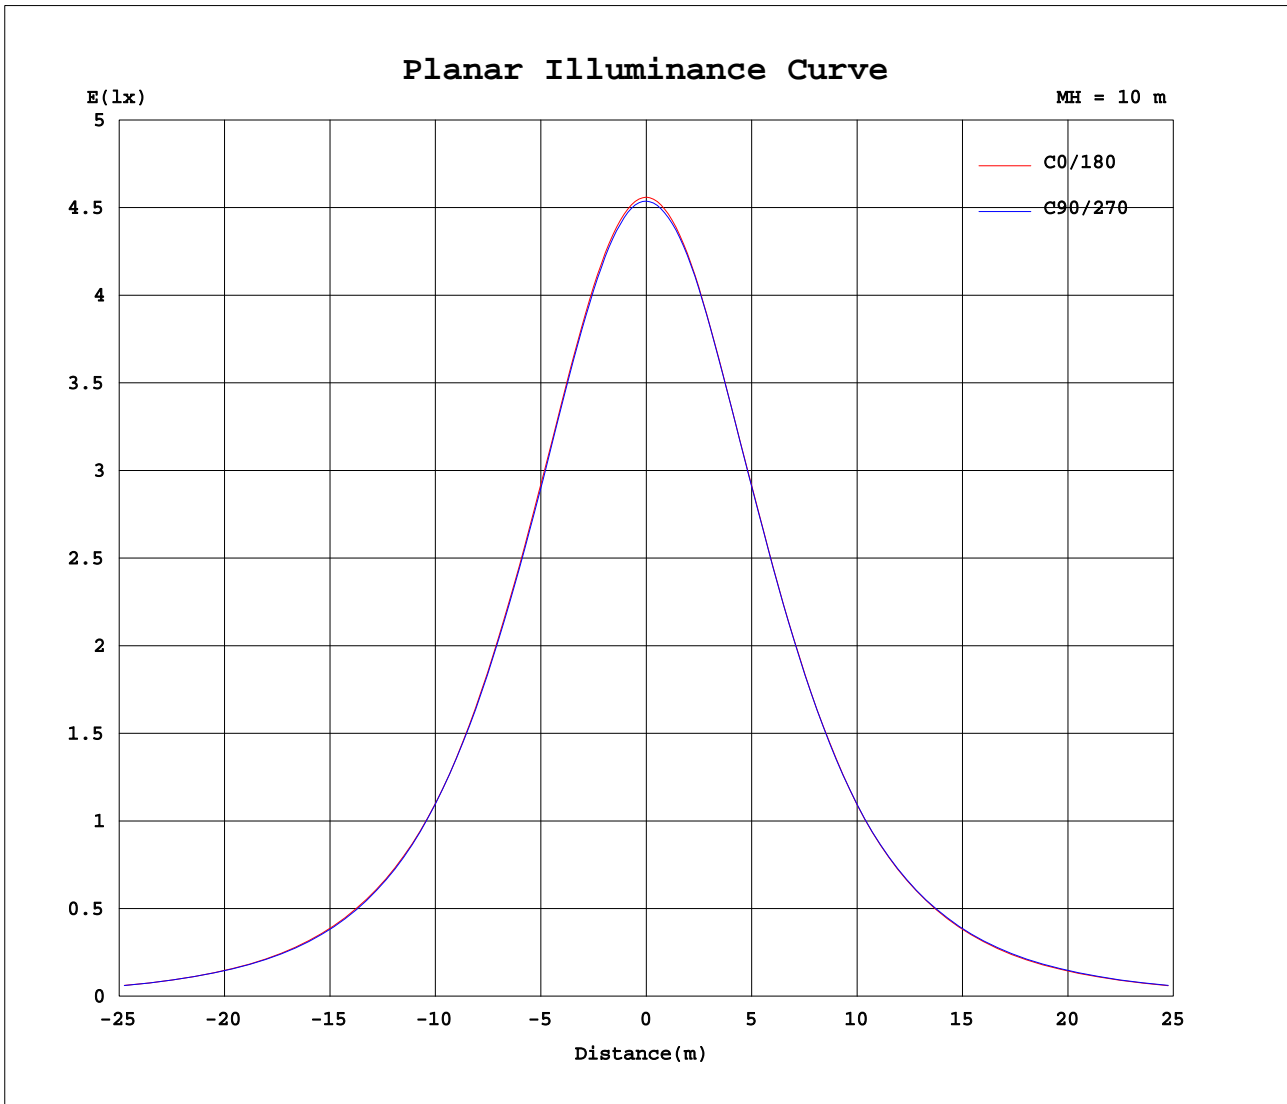

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 24.5DEG
 Operators: William
 Test Date: 2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity: 65.7%
 Test Distance: 26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-10W-SW-40	WEIGHT:
SPEC.:10W 4000K	DIM.: L:657mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	456	455	455	454	454	453	453	453	456	455	455	454	454	453	453	453			
5	454	454	454	453	452	452	451	451	454	453	453	453	452	452	452	451			
10	450	450	450	449	448	447	446	447	450	449	448	448	448	448	447	447			
15	442	441	441	440	439	439	438	439	441	440	440	441	440	439	439	439			
20	429	430	429	428	427	427	426	425	428	428	427	428	427	427	427	427			
25	413	414	413	413	411	411	411	411	412	412	412	413	412	412	411	412			
30	395	395	394	394	392	392	391	391	394	393	393	394	393	393	393	394			
35	373	372	371	371	370	370	368	367	371	370	370	369	370	370	371	371			
40	344	345	343	342	343	342	340	340	343	342	341	341	342	342	343	343			
45	311	313	310	309	310	309	306	307	309	309	308	308	309	310	310	311			
50	276	277	275	274	273	272	271	272	274	272	274	273	275	274	276	276			
55	238	237	238	236	235	233	233	232	235	234	236	236	237	237	239	238			
60	196	195	197	195	194	192	191	190	191	191	194	195	195	196	199	198			
65	150	147	148	149	149	145	145	146	147	146	147	149	151	150	152	152			
70	100.0	100	100	99.1	97.2	96.7	96.1	92.6	95.5	97.3	97.8	99.5	100	101	104	104			
75	55.7	56.1	55.6	54.7	52.5	52.3	51.7	49.4	50.3	54.1	55.8	55.4	56.3	57.3	60.2	58.9			
80	18.6	19.9	19.4	18.8	18.9	17.7	18.5	16.2	17.5	19.0	20.2	21.1	19.5	21.9	22.5	22.4			
85	3.37	3.04	2.88	2.59	2.32	2.26	2.13	2.23	2.39	2.98	3.12	3.83	3.33	3.45	3.66	4.12			
90	0.08	0.07	0.04	0.05	0.04	0.05	0.05	0.04	0.03	0.36	0.03	0.03	0.14	0.01	0.39	0.15			
95	0.03	0.03	0.04	0.04	0.03	0.03	0.03	0.03	0.04	0.12	0.04	0.04	0.03	0.03	0.03	0.04			
100	0.03	0.03	0.04	0.04	0.04	0.04	0.03	0.03	0.09	0.09	0.09	0.09	0.09	0.08	0.08	0.08			
105	0.02	0.03	0.03	0.05	0.04	0.05	0.04	0.04	0.16	0.15	0.15	0.16	0.15	0.16	0.16	0.15			
110	0.02	0.04	0.03	0.05	0.05	0.05	0.04	0.04	0.25	0.22	0.23	0.24	0.24	0.24	0.23	0.23			
115	0.05	0.06	0.06	0.07	0.07	0.05	0.05	0.07	0.33	0.31	0.32	0.32	0.32	0.32	0.32	0.32			
120	0.16	0.13	0.16	0.15	0.14	0.11	0.13	0.12	0.39	0.39	0.37	0.35	0.40	0.39	0.41	0.38			
125	0.24	0.22	0.21	0.26	0.25	0.23	0.20	0.21	0.42	0.42	0.38	0.36	0.41	0.40	0.42	0.42			
130	0.34	0.32	0.32	0.36	0.35	0.32	0.27	0.32	0.47	0.43	0.41	0.39	0.43	0.42	0.44	0.44			
135	0.47	0.41	0.42	0.48	0.47	0.43	0.34	0.40	0.49	0.44	0.43	0.45	0.50	0.45	0.47	0.48			
140	0.62	0.56	0.54	0.64	0.62	0.62	0.48	0.58	0.54	0.49	0.46	0.51	0.52	0.53	0.51	0.52			
145	0.70	0.67	0.65	0.75	0.72	0.70	0.63	0.64	0.59	0.54	0.51	0.59	0.62	0.62	0.57	0.59			
150	0.77	0.78	0.78	0.80	0.79	0.80	0.73	0.70	0.67	0.63	0.61	0.70	0.71	0.71	0.71	0.67			
155	0.82	0.84	0.83	0.84	0.80	0.81	0.81	0.78	0.77	0.74	0.73	0.79	0.76	0.78	0.76	0.78			
160	0.86	0.85	0.86	0.86	0.84	0.84	0.83	0.82	0.82	0.80	0.79	0.83	0.86	0.81	0.82	0.80			
165	0.95	0.92	0.92	0.94	0.95	0.89	0.90	0.90	0.85	0.86	0.84	0.86	0.89	0.87	0.89	0.85			
170	0.97	0.96	0.99	1.02	1.03	0.98	0.96	0.97	0.91	0.92	0.91	0.95	0.95	0.97	0.99	0.92			
175	1.04	1.00	1.06	1.08	1.08	1.02	1.03	1.00	1.01	0.99	0.99	1.03	1.02	1.02	1.02	0.99			
180	1.06	1.01	1.06	1.09	1.06	1.02	1.03	1.00	1.03	1.06	1.01	1.06	1.07	1.07	1.02	1.03			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE