
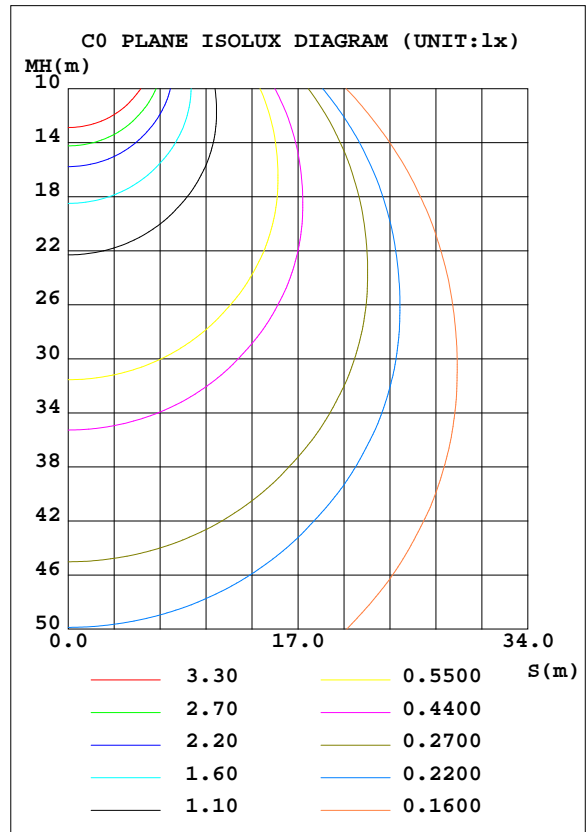


LUMINAIRE PHOTOMETRIC TEST REPORT

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-12W-SW-40	WEIGHT:
SPEC.:12W 4000K	DIM.: L:657mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 125.00 lm/W			
MODEL	BAWATY-12W-SW-40	Imax(cd)	547.2	S/MH(C0/180)	1.28
NOMINAL POWER(W)	12	LOR(%)	100.0	S/MH(C90/270)	1.29
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	1500.0	η UP, DN(C0-180)	0.1,49.8
NOMINAL FLUX(lm)	1500	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.1,50.0
LAMPS INSIDE	1	η up(%)	0.2	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	220	η down(%)	99.8	CIBSE SHR MAX	1.35

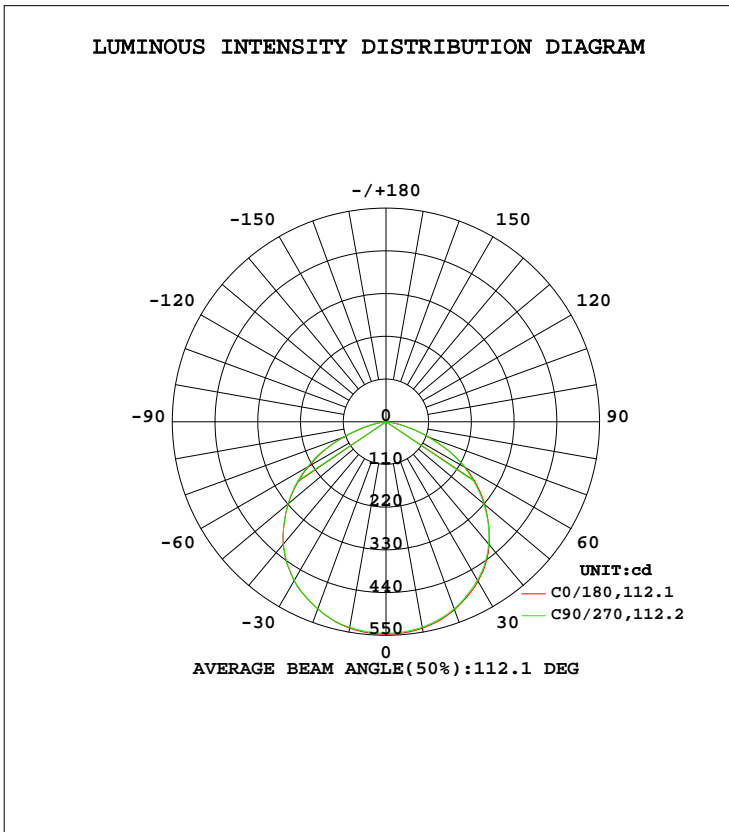

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:24.5DEG  
 Operators:William  
 Test Date:2017-12-16

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.352  
 Humidity:65.7%  
 Test Distance:26.000m [K=1.4470]  
 Remarks:

Checker: DENNY

Assessor: JOE

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	539.7	539.5	537.2	535.7	539.6	537.7	537.9	536.7	0- 10	51.69	51.69	3.45,3.45
20	515.2	514.8	512.5	510.7	513.1	512.8	512.7	512.3	10- 20	149.0	200.7	13.4,13.4
30	473.8	472.8	470.8	469.5	472.8	471.1	472.1	471.8	20- 30	228.0	428.7	28.6,28.6
40	413.1	411.1	411.3	407.8	411.5	409.1	411.0	411.4	30- 40	277.7	706.4	47.1,47.1
50	331.7	330.0	328.1	325.3	328.2	328.6	330.0	330.9	40- 50	286.1	992.5	66.2,66.2
60	235.3	236.0	232.2	229.1	229.5	232.8	234.1	238.3	50- 60	252.5	1245	83,83
70	120.0	120.0	116.6	115.3	114.6	117.4	120.2	124.6	60- 70	174.9	1420	94.7,94.7
80	22.31	23.29	22.69	22.14	21.05	24.19	23.44	27.03	70- 80	70.71	1491	99.4,99.4
90	0.0975	0.0517	0.0487	0.0594	0.0353	0.0353	0.1656	0.4706	80- 90	6.992	1498	99.8,99.8
100	0.0310	0.0428	0.0460	0.0398	0.1075	0.1073	0.1070	0.0951	90-100	0.0671	1498	99.8,99.8
110	0.0246	0.0363	0.0572	0.0457	0.2970	0.2731	0.2854	0.2741	100-110	0.1217	1498	99.8,99.8
120	0.1894	0.1893	0.1661	0.1534	0.4676	0.4432	0.4755	0.4875	110-120	0.2253	1498	99.9,99.9
130	0.4034	0.3798	0.4156	0.3203	0.5697	0.4907	0.5160	0.5230	120-130	0.3393	1498	99.9,99.9
140	0.7450	0.6526	0.7489	0.5820	0.6531	0.5462	0.6189	0.6177	130-140	0.4153	1499	99.9,99.9
150	0.9257	0.9377	0.9505	0.8788	0.8074	0.7361	0.8560	0.8552	140-150	0.4772	1499	99.9,99.9
160	1.028	1.033	1.010	0.9976	0.9836	0.9473	1.034	0.9859	150-160	0.4349	1500	100,100
170	1.163	1.187	1.236	1.152	1.092	1.093	1.140	1.188	160-170	0.3020	1500	100,100
180	1.270	1.270	1.272	1.235	1.234	1.211	1.284	1.223	170-180	0.1149	1500	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 851.15 lm

%lum = 56.7%  
%lamp = 56.7%

Conical surface Flux(120deg): 1245 lm

%lum = 83.0%  
%lamp = 83.0%

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:24.5DEG  
Operators:William  
Test Date:2017-12-16


γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.352  
Humidity:65.7%  
Test Distance:26.000m [K=1.4470]  
Remarks:

Checker: DENNY

Assessor: JOE

LUMINANCE LIMITATION CURVES

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-12W-SW-40	WEIGHT:
SPEC.:12W 4000K	DIM.: L:657mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

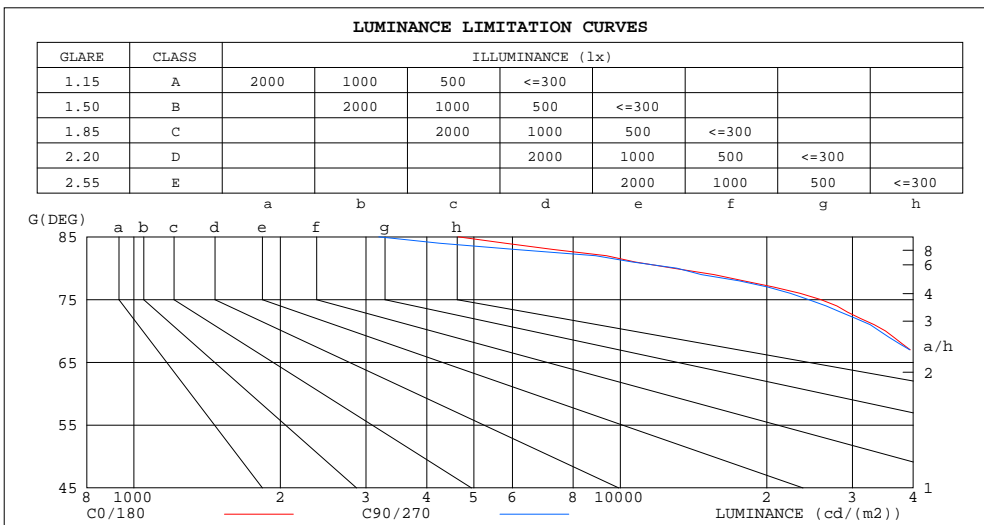

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	4642	3188
80	12845	13065
75	25822	24359
70	35074	34103
65	42546	42396
60	47053	46446
55	49813	49092
50	51599	51048
45	52778	52670

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:24.5DEG  
 Operators:William  
 Test Date:2017-12-16

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.352  
 Humidity:65.7%  
 Test Distance:26.000m [K=1.4470]  
 Remarks:


Checker: DENNY

Assessor: JOE

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-12W-SW-40	WEIGHT:
SPEC.:12W 4000K	DIM.: L:657mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pw																0
pfc																0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.05	1.01	.98	1.03	.99	.96	.99	.96	.93	.95	.92	.90	.91	.89	.88	.86
2.0	.92	.86	.80	.90	.84	.79	.87	.82	.78	.84	.79	.76	.81	.77	.74	.72
3.0	.81	.73	.67	.80	.72	.67	.77	.71	.65	.74	.69	.64	.71	.67	.63	.61
4.0	.72	.64	.57	.71	.63	.57	.68	.61	.56	.66	.60	.55	.64	.59	.54	.52
5.0	.64	.56	.49	.63	.55	.49	.61	.54	.48	.59	.53	.48	.57	.52	.47	.45
6.0	.58	.49	.43	.57	.49	.43	.55	.48	.42	.54	.47	.42	.52	.46	.42	.40
7.0	.53	.44	.38	.52	.44	.38	.50	.43	.37	.49	.42	.37	.47	.41	.37	.35
8.0	.48	.40	.34	.47	.39	.34	.46	.39	.33	.45	.38	.33	.44	.38	.33	.31
9.0	.44	.36	.30	.43	.36	.30	.42	.35	.30	.41	.35	.30	.40	.34	.30	.28
10.0	.41	.33	.28	.40	.33	.27	.39	.32	.27	.38	.32	.27	.37	.31	.27	.25

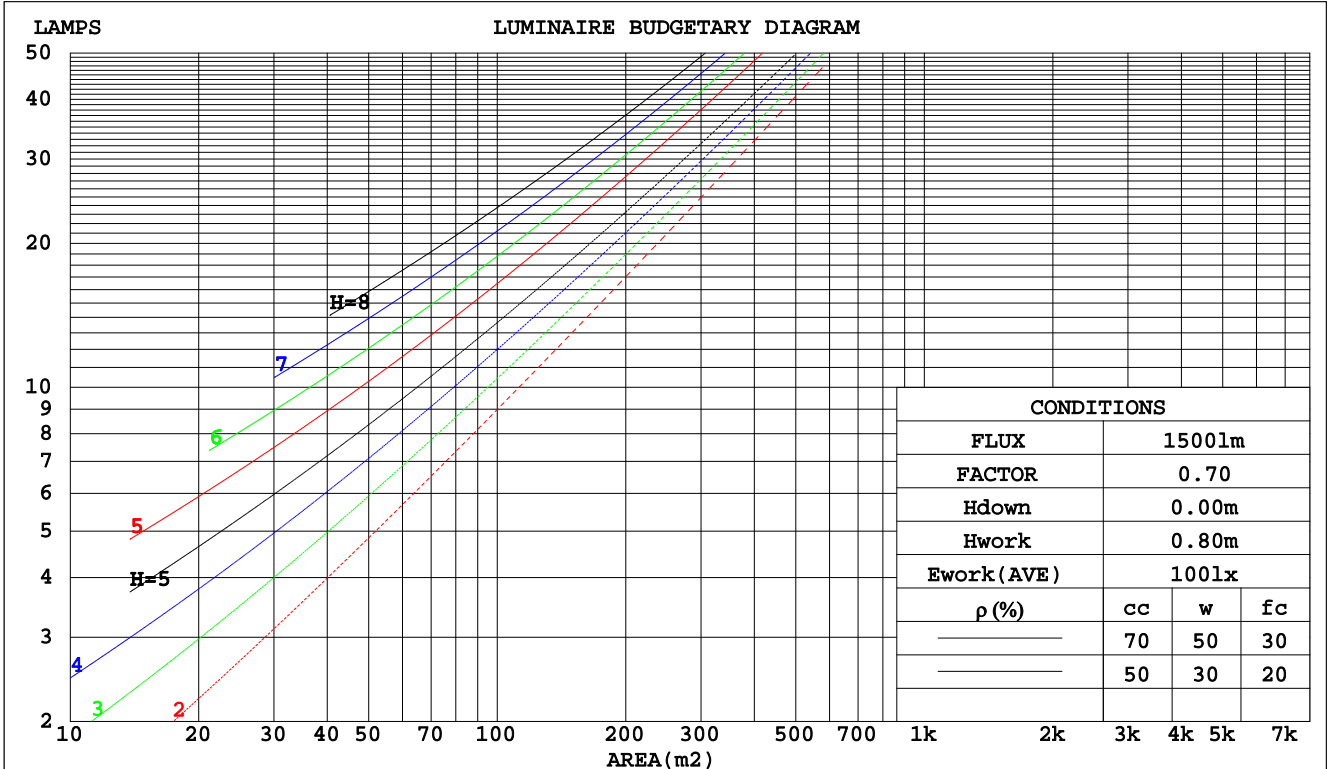

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:24.5DEG  
 Operators:William  
 Test Date:2017-12-16

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.352  
 Humidity:65.7%  
 Test Distance:26.000m [K=1.4470]  
 Remarks:

Checker: DENNY

Assessor: JOE

WEC AND CCEC

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-12W-SW-40	WEIGHT:
SPEC.:12W 4000K	DIM.: L:657mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.282	.161	.051	.275	.157	.050	.262	.150	.048	.250	.144	.046	.239	.138	.045	
2.0	.274	.150	.046	.267	.147	.045	.256	.142	.044	.245	.138	.043	.235	.133	.042	
3.0	.257	.137	.041	.252	.135	.041	.242	.131	.040	.232	.127	.039	.223	.124	.038	
4.0	.240	.125	.037	.235	.123	.036	.226	.120	.036	.218	.117	.035	.210	.114	.035	
5.0	.224	.114	.033	.219	.113	.033	.211	.110	.032	.204	.107	.032	.197	.105	.032	
6.0	.208	.105	.030	.205	.103	.030	.197	.101	.029	.191	.099	.029	.184	.097	.029	
7.0	.195	.096	.027	.191	.095	.027	.185	.093	.027	.179	.092	.027	.173	.090	.026	
8.0	.182	.089	.025	.179	.088	.025	.174	.087	.025	.168	.085	.025	.163	.084	.024	
9.0	.171	.083	.023	.169	.082	.023	.163	.081	.023	.159	.079	.023	.154	.078	.023	
10.0	.161	.077	.021	.159	.077	.021	.154	.076	.021	.150	.074	.021	.146	.073	.021	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.180	.158	.138	.154	.135	.119	.105	.093	.082	.061	.054	.048	.019	.017	.015	
2.0	.171	.133	.101	.147	.115	.088	.100	.079	.061	.058	.046	.036	.019	.015	.012	
3.0	.163	.116	.077	.140	.100	.067	.096	.069	.047	.056	.040	.028	.018	.013	.009	
4.0	.156	.102	.061	.134	.088	.053	.092	.061	.037	.053	.036	.022	.017	.012	.007	
5.0	.149	.092	.049	.128	.079	.043	.088	.055	.030	.051	.033	.018	.016	.011	.006	
6.0	.142	.083	.041	.122	.072	.036	.084	.050	.025	.049	.030	.015	.016	.010	.005	
7.0	.135	.076	.035	.116	.066	.031	.080	.046	.022	.047	.027	.013	.015	.009	.004	
8.0	.129	.071	.030	.111	.061	.027	.077	.043	.019	.045	.025	.011	.014	.008	.004	
9.0	.123	.066	.027	.106	.057	.023	.073	.040	.017	.043	.024	.010	.014	.008	.003	
10.0	.117	.061	.024	.101	.053	.021	.070	.037	.015	.041	.022	.009	.013	.007	.003	

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:24.5DEG  
 Operators:William  
 Test Date:2017-12-16

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.352  
 Humidity:65.7%  
 Test Distance:26.000m [K=1.4470]  
 Remarks:

Checker: DENNY

Assessor: JOE

UGR(Unified Glare Rating) Table

NAME: LED TRI-PROOF LIGHT		TYPE:BAWATY-12W-SW-40					WEIGHT:				
SPEC.:12W 4000K		DIM.: L:657mm					SERIAL No.:				
MFR.: DIMON TECHNOLOGY LTD		SUR.:					Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	Viewed crosswise					Viewed endwise					
x = 2H y = 2H	25.1	26.6	25.4	26.8	27.0	25.1	26.6	25.4	26.8	27.0	
3H	26.2	27.6	26.5	27.8	28.1	26.2	27.6	26.5	27.8	28.0	
4H	26.5	27.8	26.8	28.1	28.3	26.4	27.7	26.8	28.0	28.2	
6H	26.6	27.8	26.9	28.0	28.3	26.5	27.7	26.8	28.0	28.3	
8H	26.5	27.7	26.9	28.0	28.3	26.5	27.6	26.8	27.9	28.2	
12H	26.5	27.6	26.8	27.9	28.2	26.4	27.5	26.8	27.8	28.1	
4H 2H	25.6	26.9	25.9	27.2	27.4	25.6	26.9	25.9	27.2	27.4	
3H	26.9	28.0	27.2	28.3	28.6	26.8	28.0	27.2	28.3	28.6	
4H	27.2	28.3	27.6	28.6	28.9	27.2	28.2	27.5	28.5	28.8	
6H	27.3	28.2	27.7	28.6	29.0	27.3	28.2	27.7	28.5	28.9	
8H	27.3	28.2	27.7	28.5	28.9	27.2	28.1	27.7	28.4	28.8	
12H	27.3	28.0	27.7	28.4	28.8	27.2	28.0	27.6	28.4	28.8	
8H 4H	27.3	28.2	27.7	28.5	28.9	27.3	28.1	27.7	28.5	28.9	
6H	27.5	28.2	27.9	28.6	29.0	27.4	28.1	27.8	28.5	28.9	
8H	27.5	28.1	27.9	28.5	28.9	27.4	28.0	27.9	28.4	28.9	
12H	27.4	28.0	27.9	28.4	28.9	27.4	27.9	27.8	28.3	28.8	
12H 4H	27.3	28.1	27.7	28.4	28.9	27.2	28.0	27.7	28.4	28.8	
6H	27.4	28.1	27.9	28.5	28.9	27.4	28.0	27.8	28.4	28.9	
8H	27.4	28.0	27.9	28.4	28.9	27.4	27.9	27.9	28.3	28.8	
Variations with the observer position at spacings:											
S = 1.0H	+ 0.3 / - 0.3					+ 0.2 / - 0.3					
1.5H	+ 0.2 / - 0.4					+ 0.2 / - 0.4					
2.0H	+ 0.4 / - 0.4					+ 0.4 / - 0.4					

CIE Pub.117, 1500 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 1.4)

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:24.5DEG  
 Operators:William  
 Test Date:2017-12-16

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.352  
 Humidity:65.7%  
 Test Distance:26.000m [K=1.4470]  
 Remarks:

Checker: DENNY

Assessor: JOE

UTILIZATION FACTORS TABLE

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-12W-SW-40	WEIGHT:
SPEC.:12W 4000K	DIM.: L:657mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	59	47	40	58	47	40	57	46	40	34
0.80	69	58	50	68	57	50	66	56	50	43
1.00	78	67	60	76	66	60	74	68	59	52
1.25	85	75	68	83	74	68	81	73	67	60
1.50	90	80	74	88	80	73	85	78	72	65
2.00	97	89	83	95	87	82	91	85	80	73
2.50	100	93	87	98	92	87	95	89	85	77
3.00	104	97	92	101	96	91	98	93	89	81
4.00	107	102	98	105	100	97	101	97	94	85
5.00	110	105	102	107	103	100	103	100	97	88
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:24.5DEG  
 Operators:William  
 Test Date:2017-12-16


$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.352  
 Humidity:65.7%  
 Test Distance:26.000m [K=1.4470]  
 Remarks:

Checker: DENNY

Assessor: JOE

**ISOCANDELA DIAGRAM**

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-12W-SW-40	WEIGHT:
SPEC.:12W 4000K	DIM.: L:657mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

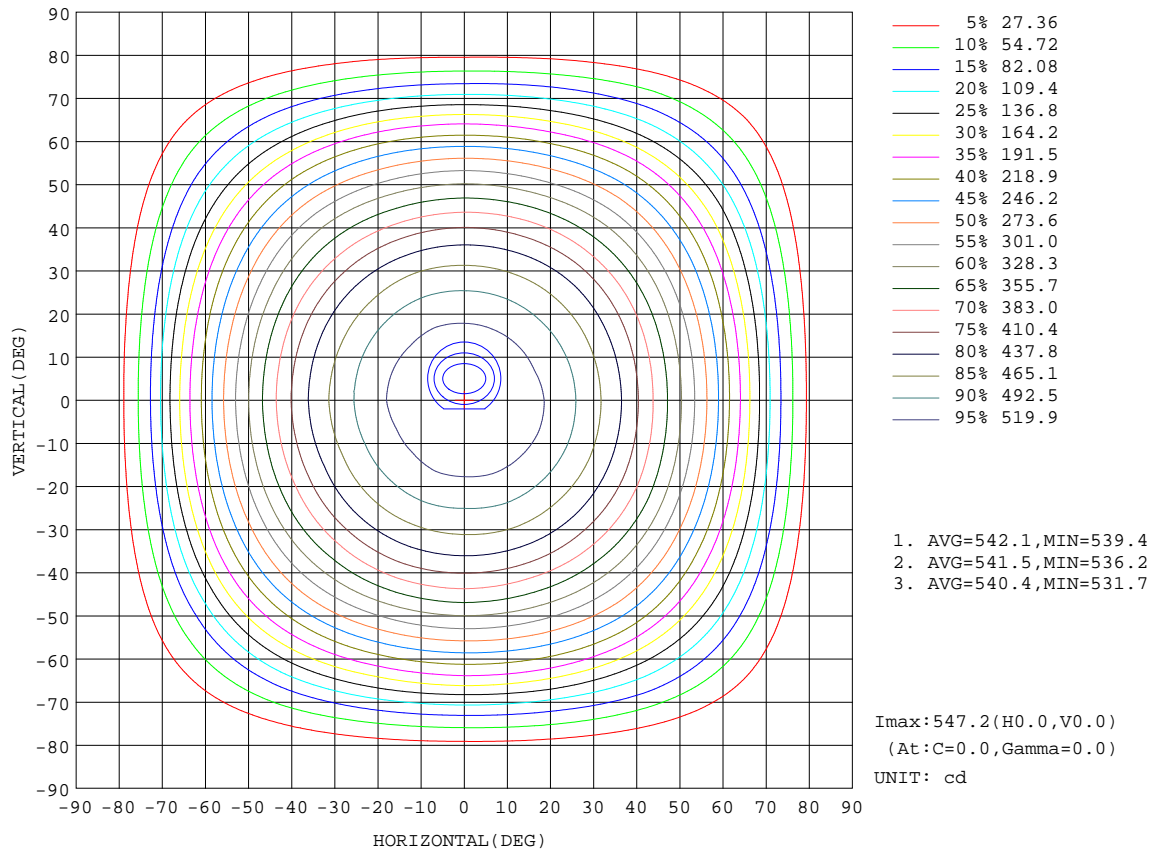

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 24.5DEG  
 Operators: William  
 Test Date: 2017-12-16

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.0.352  
 Humidity: 65.7%  
 Test Distance: 26.000m [K=1.4470]  
 Remarks:


Checker: DENNY

Assessor: JOE



**AAI Figure**

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-12W-SW-40	WEIGHT:
SPEC.:12W 4000K	DIM.: L:657mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

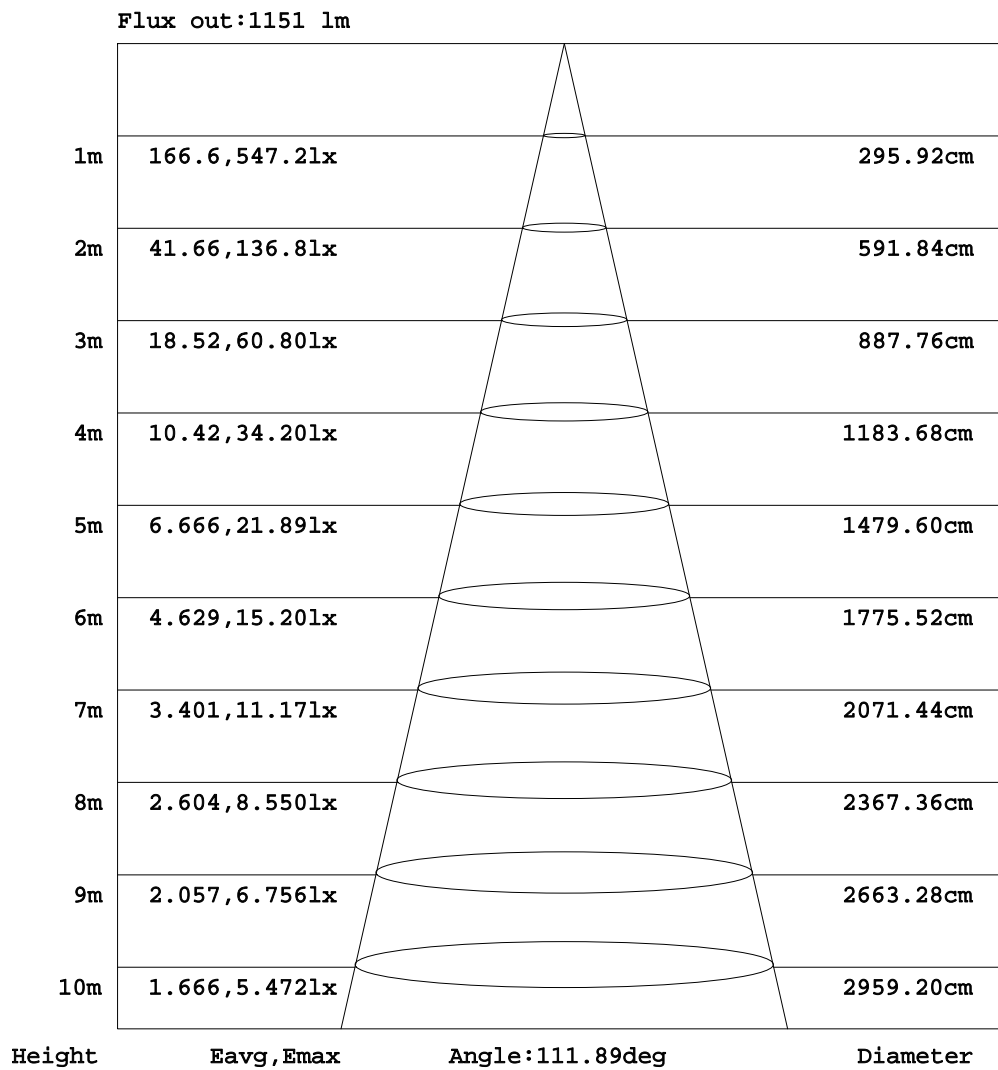

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:24.5DEG  
 Operators:William  
 Test Date:2017-12-16


γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.352  
 Humidity:65.7%  
 Test Distance:26.000m [K=1.4470]  
 Remarks:

Checker: DENNY

Assessor: JOE

**ISOLUX DIAGRAM**

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-12W-SW-40	WEIGHT:
SPEC.:12W 4000K	DIM.: L:657mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

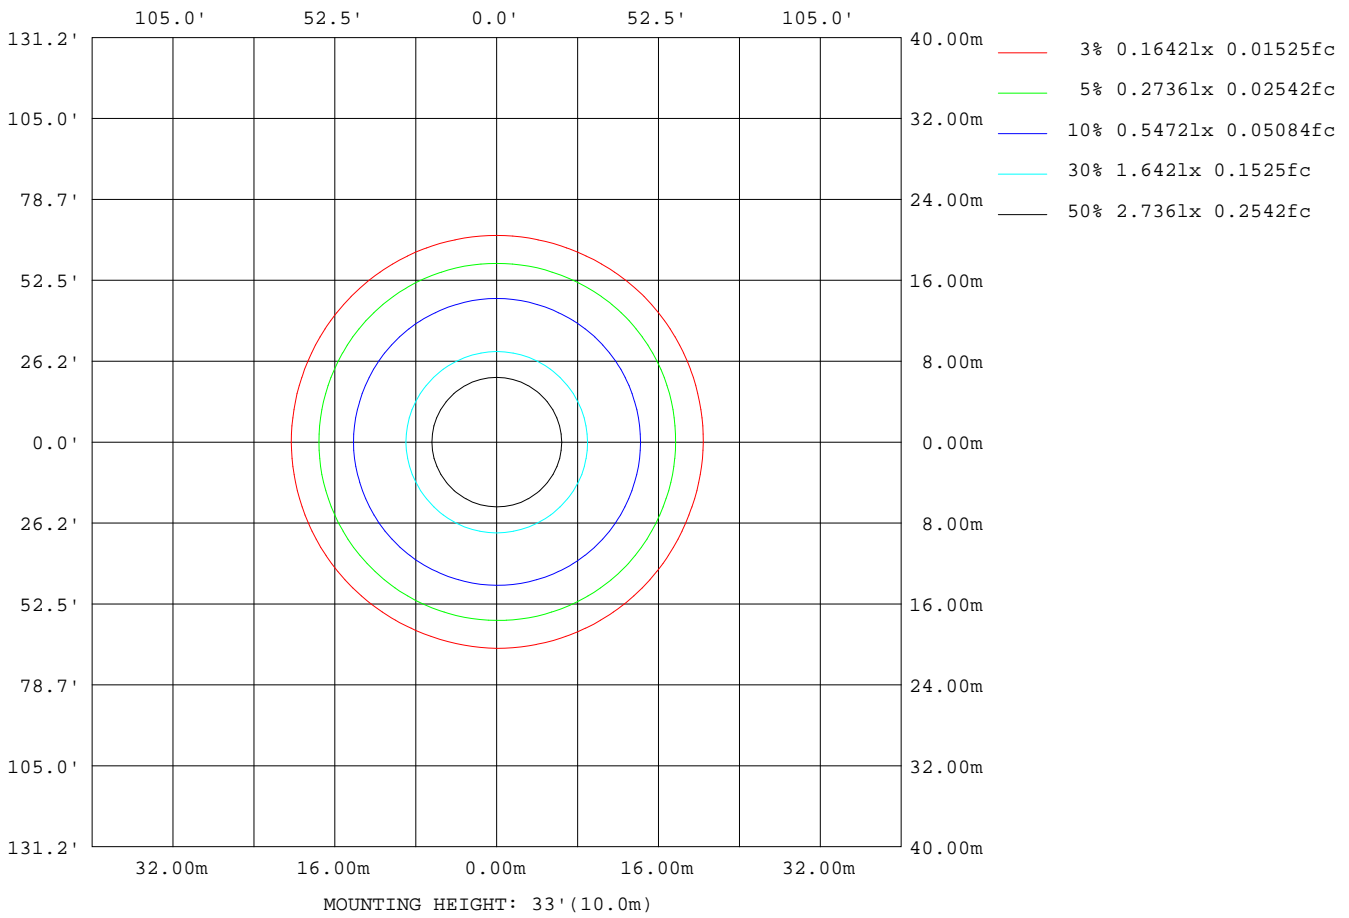


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:24.5DEG  
 Operators:William  
 Test Date:2017-12-16

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.352  
 Humidity:65.7%  
 Test Distance:26.000m [K=1.4470]  
 Remarks:

Checker: DENNY

Assessor: JOE

Planar Illuminance Curve

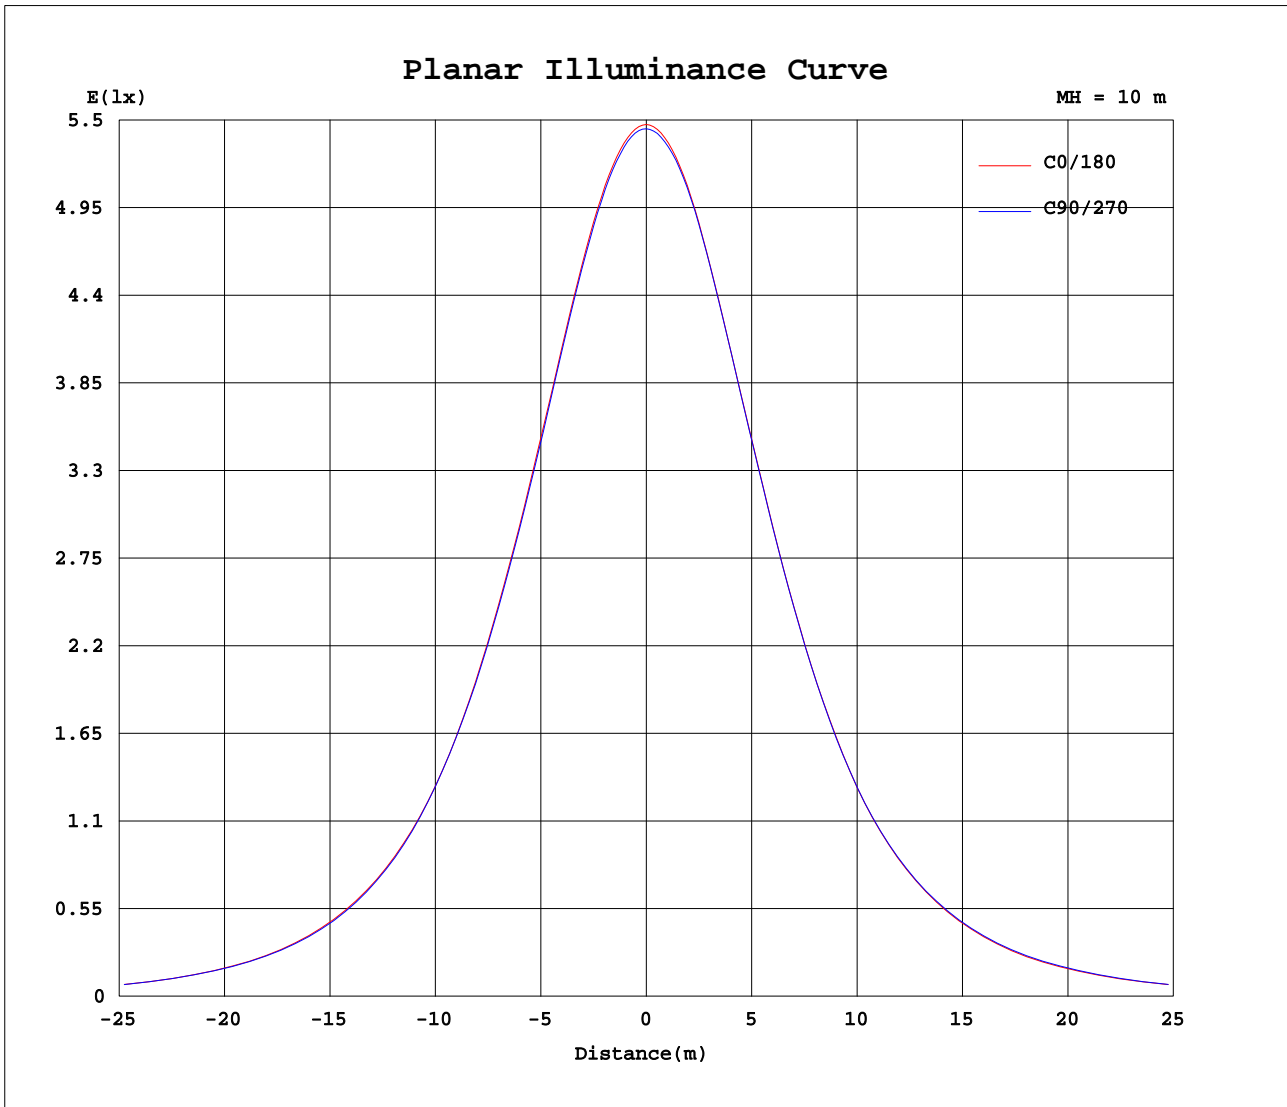

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 24.5DEG  
 Operators: William  
 Test Date: 2017-12-16

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.0.352  
 Humidity: 65.7%  
 Test Distance: 26.000m [K=1.4470]  
 Remarks:

Checker: DENNY

Assessor: JOE

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-12W-SW-40	WEIGHT:
SPEC.:12W 4000K	DIM.: L:657mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C( DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	547	546	546	545	544	544	544	543	547	546	546	545	544	544	544	543			
5	545	544	544	544	543	542	542	542	545	544	544	543	543	542	542	542			
10	540	539	540	539	537	537	536	536	540	539	538	538	538	537	537	537			
15	530	530	529	529	527	527	526	526	529	528	527	529	528	527	527	527			
20	515	516	515	514	513	513	511	510	513	513	513	514	513	512	512	513			
25	496	496	496	495	493	494	493	493	495	495	495	495	494	494	494	495			
30	474	474	473	473	471	470	470	469	473	471	471	473	472	472	472	473			
35	447	446	446	445	444	443	442	441	445	444	443	443	444	444	445	446			
40	413	413	411	411	411	411	408	408	412	411	409	409	411	411	411	412			
45	373	375	372	371	372	371	367	368	371	370	369	369	371	372	371	373			
50	332	332	330	328	328	326	325	326	328	327	329	328	330	329	331	331			
55	286	285	286	284	282	280	280	279	282	280	283	283	285	284	287	286			
60	235	233	236	234	232	230	229	229	229	230	233	234	234	235	238	238			
65	180	177	178	179	179	174	174	175	176	175	176	179	181	180	183	182			
70	120	120	120	119	117	116	115	111	115	117	117	119	120	121	125	125			
75	66.8	67.3	66.8	65.7	63.0	62.8	62.1	59.3	60.3	65.0	66.9	66.4	67.5	68.8	72.2	70.7			
80	22.3	23.9	23.3	22.6	22.7	21.3	22.1	19.5	21.0	22.8	24.2	25.3	23.4	26.3	27.0	26.8			
85	4.05	3.65	3.45	3.11	2.78	2.71	2.56	2.68	2.87	3.58	3.75	4.60	3.99	4.14	4.39	4.94			
90	0.10	0.09	0.05	0.06	0.05	0.06	0.06	0.05	0.04	0.44	0.04	0.04	0.17	0.01	0.47	0.17			
95	0.03	0.03	0.05	0.05	0.04	0.04	0.04	0.04	0.05	0.14	0.04	0.05	0.04	0.04	0.04	0.05			
100	0.03	0.03	0.04	0.05	0.05	0.05	0.04	0.04	0.11	0.11	0.11	0.11	0.11	0.10	0.10	0.10			
105	0.03	0.04	0.04	0.06	0.05	0.06	0.04	0.04	0.19	0.18	0.18	0.19	0.18	0.19	0.19	0.18			
110	0.02	0.05	0.04	0.06	0.06	0.06	0.05	0.05	0.30	0.26	0.27	0.29	0.29	0.29	0.27	0.27			
115	0.06	0.07	0.07	0.08	0.08	0.06	0.06	0.08	0.39	0.37	0.38	0.38	0.38	0.38	0.38	0.38			
120	0.19	0.15	0.19	0.18	0.17	0.13	0.15	0.14	0.47	0.46	0.44	0.42	0.48	0.46	0.49	0.45			
125	0.28	0.26	0.25	0.31	0.30	0.27	0.24	0.25	0.50	0.50	0.46	0.43	0.50	0.48	0.50	0.50			
130	0.40	0.38	0.38	0.43	0.42	0.38	0.32	0.39	0.57	0.51	0.49	0.46	0.52	0.50	0.52	0.52			
135	0.57	0.49	0.50	0.57	0.56	0.51	0.40	0.48	0.59	0.52	0.51	0.54	0.59	0.54	0.57	0.57			
140	0.74	0.68	0.65	0.77	0.75	0.75	0.58	0.70	0.65	0.59	0.55	0.61	0.62	0.63	0.62	0.62			
145	0.84	0.81	0.78	0.90	0.87	0.84	0.76	0.77	0.71	0.65	0.62	0.71	0.75	0.75	0.69	0.70			
150	0.93	0.94	0.94	0.96	0.95	0.96	0.88	0.85	0.81	0.76	0.74	0.84	0.86	0.86	0.86	0.81			
155	0.99	1.01	0.99	1.01	0.96	0.97	0.98	0.94	0.93	0.89	0.88	0.95	0.92	0.94	0.91	0.94			
160	1.03	1.02	1.03	1.03	1.01	1.01	1.00	0.99	0.98	0.96	0.95	1.00	1.03	0.98	0.99	0.96			
165	1.14	1.10	1.10	1.13	1.14	1.07	1.08	1.08	1.02	1.03	1.01	1.03	1.07	1.05	1.07	1.02			
170	1.16	1.15	1.19	1.22	1.24	1.18	1.15	1.17	1.09	1.10	1.09	1.14	1.14	1.17	1.19	1.10			
175	1.25	1.20	1.27	1.30	1.29	1.23	1.24	1.20	1.21	1.19	1.19	1.24	1.22	1.23	1.22	1.19			
180	1.27	1.21	1.27	1.31	1.27	1.22	1.24	1.20	1.23	1.27	1.21	1.27	1.28	1.28	1.22	1.24			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:24.5DEG  
 Operators:William  
 Test Date:2017-12-16

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.352  
 Humidity:65.7%  
 Test Distance:26.000m [K=1.4470]  
 Remarks:

Checker: DENNY

Assessor: JOE