


# LED High Bay Light


**DIMON**  
TECHNOLOGY

## Installation Instructions

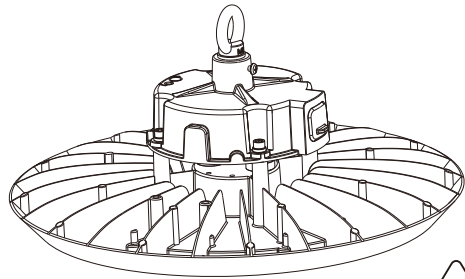


### Physical Dimensions

#### No receptacle

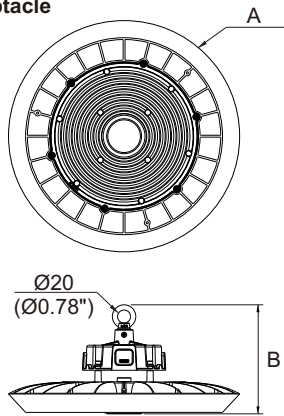

	A (Ø)		B (H)	
	mm	inch	mm	inch
100W	273	10.75	156	6.14
150W	300	11.81	159	6.25
200W	330	12.99	162	6.37
240W	355	13.97	167	6.57

#### Zhaga receptacle

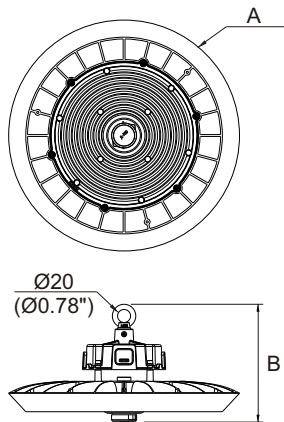

	A (Ø)		B (H)	
	mm	inch	mm	inch
100W	273	10.75	170	6.69
150W	300	11.81	173	6.88
200W	330	12.99	176	6.92
240W	355	13.97	181	7.12


Product Specifications		100W	150W	200W	240W
Input Voltage		100-277VAC / 120-277VAC / 100-240VAC / 220-240VAC (Subject to the input voltage on nameplate)			
Power Frequency		50 / 60 Hz			
Outlook Dimensions	No receptacle	Ø273x156mm (10.75"x6.14")	Ø300x159mm (11.81"x6.25")	Ø330x162mm (12.99"x6.37")	Ø355x167mm (13.97"x6.57")
	Zhaga receptacle	Ø273x170mm (10.75"x6.69")	Ø300x173mm (11.81"x6.88")	Ø330x176mm (12.99"x6.92")	Ø355x181mm (13.97"x7.12")
Luminaire Net Weight		1.8kg(3.97Lbs)	2kg(4.41Lbs)	2.3kg(5.07Lbs)	2.6kg(5.73Lbs)
Working Temperature		-30°C to +50°C(-22°F to +122°F)			-30°C to +45°C (-22°F to +113°F)
Storing Temperature		-40°C to +70°C(-40°F to +158°F)			

\* Please subject to actual product for accurate weight.

### Power Selectable

**Caution:**  
Please power off the luminaire before adjusting the DIP switch.  
Please do not use metal tool to adjust the DIP switch.  
Please adjust the switch gently.

#### Power Selectable





**A: 100% B: 80% C: 60%**

Power Percentage	240W	200W	150W	100W
100%	240W	200W	150W	100W
80%	190W	160W	120W	80W
60%	145W	120W	90W	60W


\* The tolerance for power is ±10%

### Sensor Mount

#### 1 Zhaga sensor

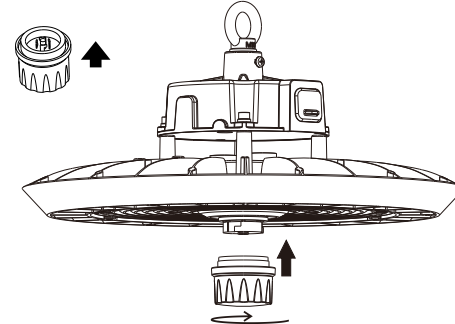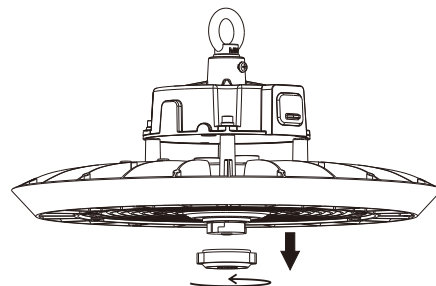


#### 2 1 pin sensor

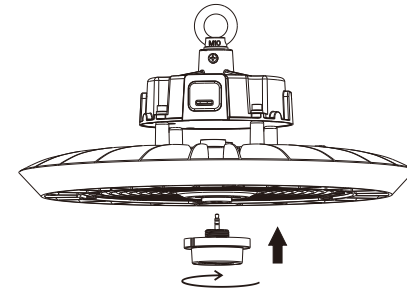


1 - 1.2N.m

### Suspension Mount


#### 1. ⚠ Make sure the screws are tightened

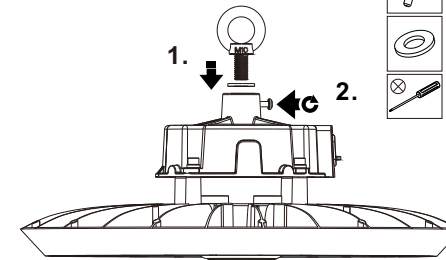


#### 2. ⚠ Recommended Hook Size: Ø6x60mm/ Ø8x80mm

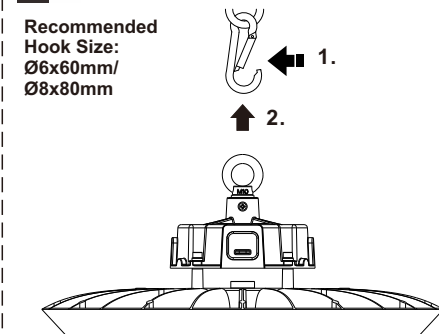

### Ceiling Mount(Unit: mm/inch)

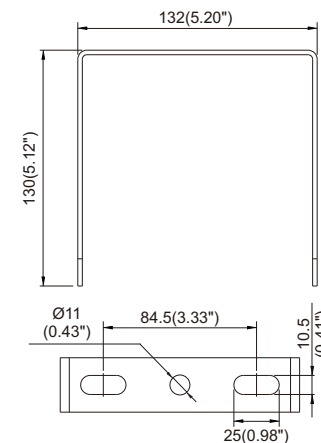


#### 1. ⚠

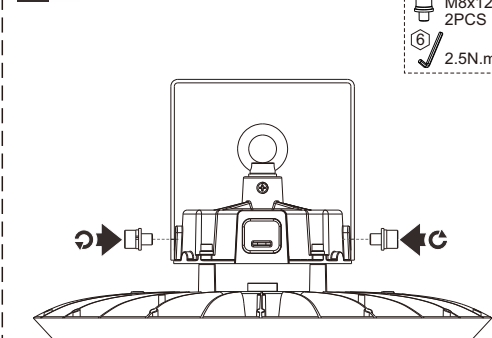


M8x12  
2PCS  
2.5N.m


2. ✂

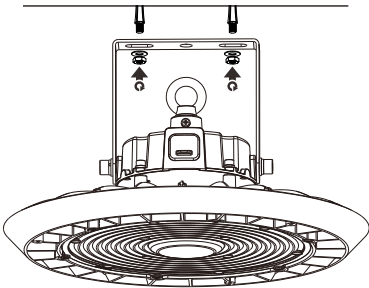


3. ✂

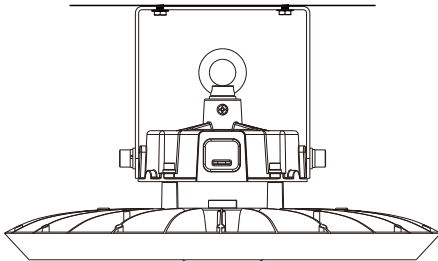

3. ✂

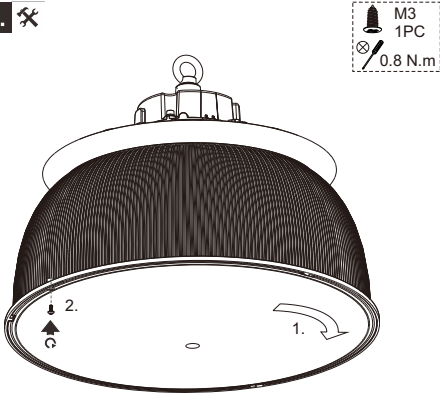

4. ✂

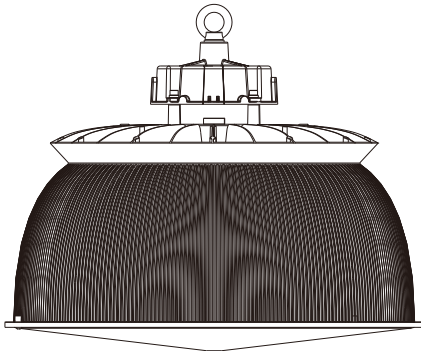

AC cords

L	brown		black
N	blue		white
⊕	yellow/green		green

DIM cords

Note: color for dim cords subject to the cable label on luminaire



Warning! Do not wire dim cord to high voltage, or dim function will fail.

Reminder

We appreciate your purchase!


- Please read the entire instruction manual before installation and keep it for future reference.
1. Please do not modify or dismantle the luminaire or replace accessories without confirming with the supplier first.
  2. Please authorize only qualified personnel to install the lamp and ensure they follow the instruction manual. Any improper installation might cause falling, electric shock, fire, or other injury, damage or hazard.
  3. Please disconnect power before installation or any maintenance of the lamp. Do not touch the power supply when the lamp is operating.
  4. If the luminaire begins to smoke or emit odors, please disconnect power since fire or electric shock may occur. And ask qualified person to inspect and maintain the luminaire.
  5. If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.
  6. The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.
  7. We suggest you adding a separate surge protection device in distribution box to extend luminaire lifespan.

Applications


1. The product is designed for factories, workshops, warehouses and similar applications. For other special applications, please consult your salesperson to confirm firstly.
2. The product is designed for indoor, do not use it outdoor.
3. Too much dust or oil accumulation on PC lens will stop the lighting emit and heat dissipation, it will change lighting distribution, and cause high heat inside to affect LED chips performance. For such environments, we suggest you to clean the luminaire regularly to ensure longer lifespan. Or you need to use product with glass cover and better heat performance instead.
4. The suggested mounting height of the luminaire is 3-15m.
5. If you want add sensor on the luminaire, please mount samples in your project before mounting batch volume directly. Here are some tips to choose the right sensor: microwave sensor should keep away from large areas of metal and glass reflectors (separation distance at least 1m) to avoid luminaire abnormal working. PIR sensor should keep away from high temperature environments to avoid luminaire no response, please contact your salesperson for detailed suggestion for certain project.

PC Reflectors (Unit: mm/inch)

100W/150W

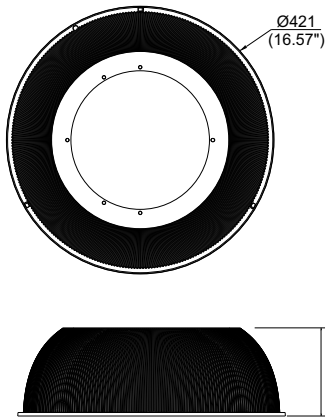


200W/240W

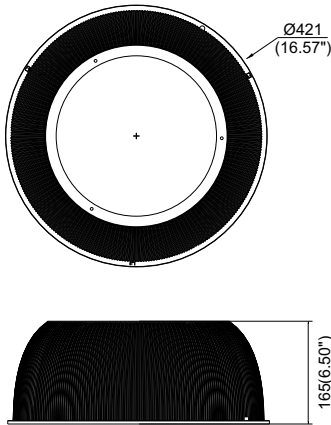


Aluminum Reflectors(Unit: mm/inch)


100W/150W

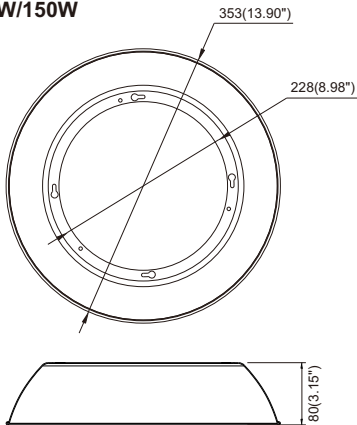


200W/240W

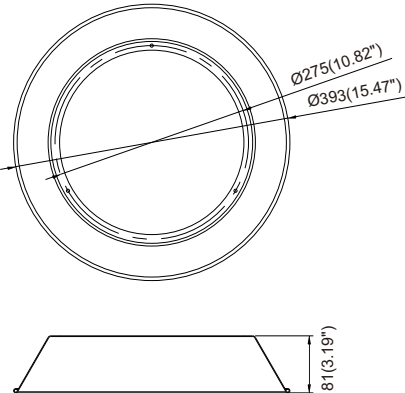


1. ✂

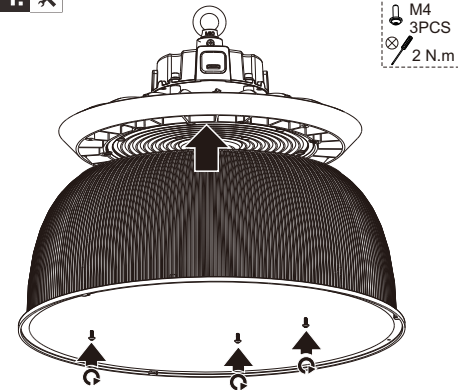

2. ✂

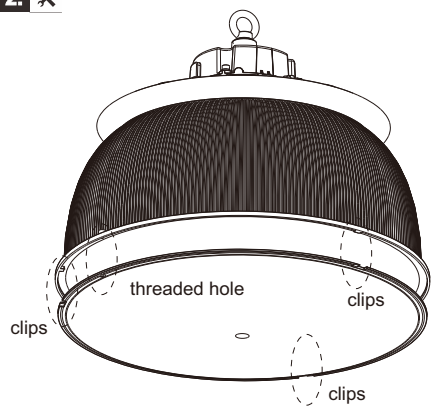

1. ✂

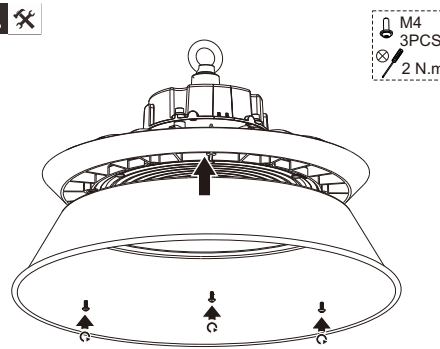

2. ✂

