
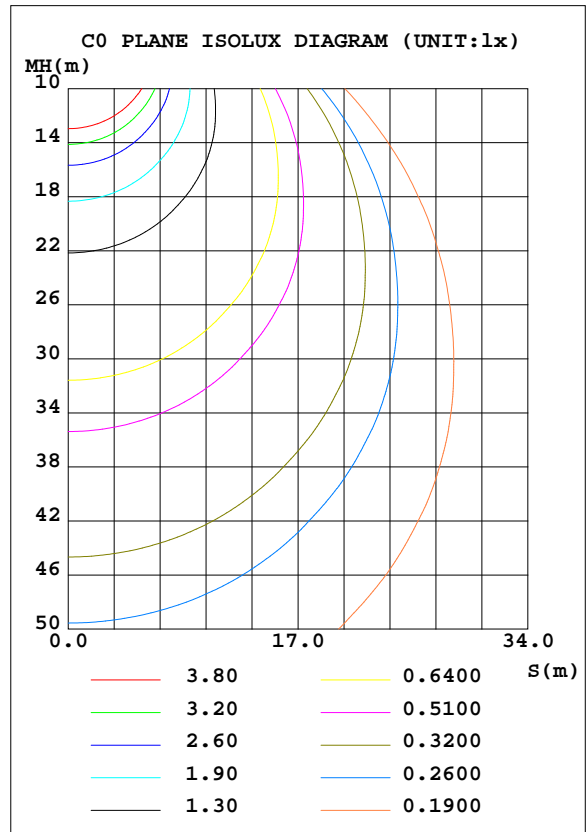


LUMINAIRE PHOTOMETRIC TEST REPORT

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-14W-SW-40	WEIGHT:
SPEC.:14W 4000K	DIM.: L:657mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 125.00 lm/W			
MODEL	BAWATY-14W-SW-40	Imax(cd)	638.4	S/MH(C0/180)	1.28
NOMINAL POWER(W)	14	LOR(%)	100.0	S/MH(C90/270)	1.29
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	1750.0	η UP, DN(C0-180)	0.1,49.8
NOMINAL FLUX(lm)	1750	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.1,50.0
LAMPS INSIDE	1	η up(%)	0.2	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	220	η down(%)	99.8	CIBSE SHR MAX	1.35

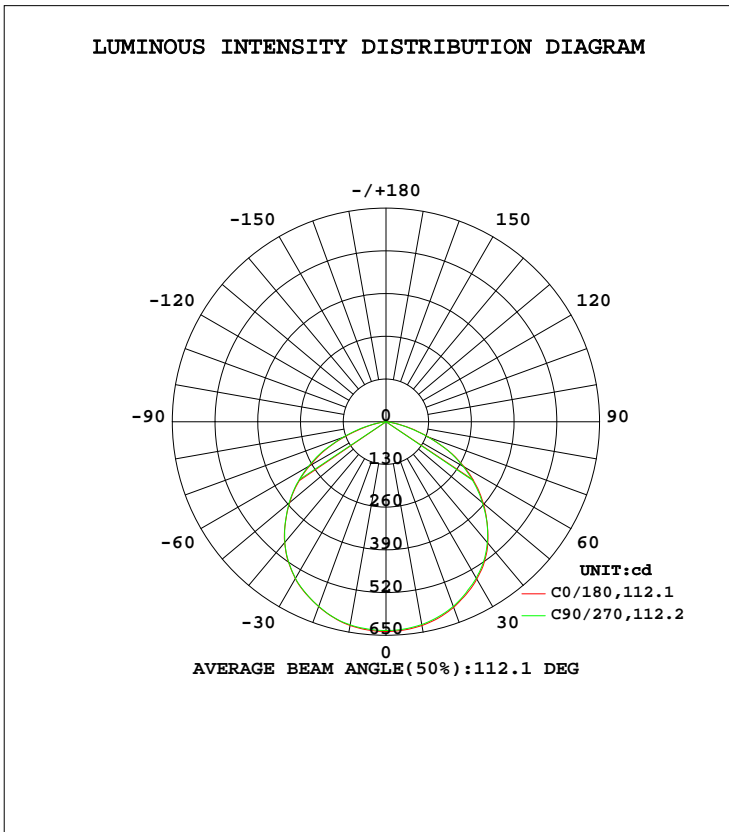

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:24.5DEG  
 Operators:William  
 Test Date:2017-12-16

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.352  
 Humidity:65.7%  
 Test Distance:26.000m [K=1.4470]  
 Remarks:

Checker: DENNY

Assessor: JOE

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	629.7	629.4	626.7	625.0	629.5	627.3	627.6	626.1	0- 10	60.30	60.30	3.45,3.45
20	601.1	600.5	598.0	595.8	598.7	598.3	598.1	597.7	10- 20	173.8	234.1	13.4,13.4
30	552.8	551.6	549.3	547.8	551.6	549.6	550.8	550.4	20- 30	266.0	500.1	28.6,28.6
40	482.0	479.7	479.8	475.8	480.1	477.3	479.4	480.0	30- 40	323.9	824.1	47.1,47.1
50	387.0	385.0	382.8	379.5	382.9	383.4	385.0	386.1	40- 50	333.8	1158	66.2,66.2
60	274.5	275.3	270.9	267.3	267.7	271.6	273.2	278.0	50- 60	294.6	1452	83,83
70	140.0	140.1	136.1	134.5	133.7	136.9	140.3	145.3	60- 70	204.0	1656	94.7,94.7
80	26.02	27.17	26.47	25.84	24.55	28.22	27.35	31.53	70- 80	82.50	1739	99.4,99.4
90	0.1138	0.0604	0.0568	0.0693	0.0412	0.0411	0.1932	0.5490	80- 90	8.158	1747	99.8,99.8
100	0.0362	0.0499	0.0537	0.0464	0.1254	0.1252	0.1248	0.1109	90-100	0.0783	1747	99.8,99.8
110	0.0287	0.0423	0.0667	0.0534	0.3465	0.3187	0.3329	0.3197	100-110	0.1420	1747	99.8,99.8
120	0.2209	0.2209	0.1938	0.1790	0.5455	0.5170	0.5548	0.5688	110-120	0.2628	1748	99.9,99.9
130	0.4706	0.4432	0.4848	0.3737	0.6646	0.5725	0.6019	0.6101	120-130	0.3958	1748	99.9,99.9
140	0.8691	0.7614	0.8737	0.6790	0.7619	0.6373	0.7221	0.7207	130-140	0.4845	1748	99.9,99.9
150	1.080	1.094	1.109	1.025	0.9420	0.8588	0.9987	0.9978	140-150	0.5567	1749	99.9,99.9
160	1.199	1.205	1.179	1.164	1.148	1.105	1.207	1.150	150-160	0.5074	1750	100,100
170	1.357	1.385	1.442	1.344	1.274	1.275	1.329	1.386	160-170	0.3524	1750	100,100
180	1.482	1.482	1.484	1.441	1.440	1.413	1.498	1.427	170-180	0.1341	1750	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 993.01 lm

%lum = 56.7%  
%lamp = 56.7%

Conical surface Flux(120deg): 1452.4 lm

%lum = 83.0%  
%lamp = 83.0%

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:24.5DEG  
Operators:William  
Test Date:2017-12-16


γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.352  
Humidity:65.7%  
Test Distance:26.000m [K=1.4470]  
Remarks:

Checker: DENNY

Assessor: JOE

LUMINANCE LIMITATION CURVES

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-14W-SW-40	WEIGHT:
SPEC.:14W 4000K	DIM.: L:657mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

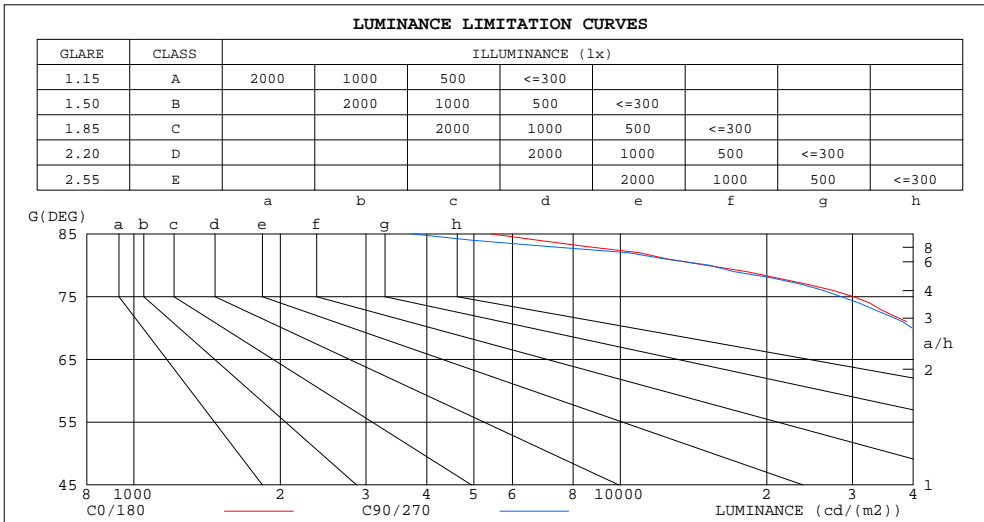

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	5416	3719
80	14986	15243
75	30126	28418
70	40920	39787
65	49637	49461
60	54895	54187
55	58115	57274
50	60199	59556
45	61574	61448

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:24.5DEG  
 Operators:William  
 Test Date:2017-12-16

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.352  
 Humidity:65.7%  
 Test Distance:26.000m [K=1.4470]  
 Remarks:


Checker: DENNY

Assessor: JOE

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-14W-SW-40	WEIGHT:
SPEC.:14W 4000K	DIM.: L:657mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.05	1.01	.98	1.03	.99	.96	.99	.96	.93	.95	.92	.90	.91	.89	.88	.86
2.0	.92	.86	.80	.90	.84	.79	.87	.82	.78	.84	.79	.76	.81	.77	.74	.72
3.0	.81	.73	.67	.80	.72	.67	.77	.71	.65	.74	.69	.64	.71	.67	.63	.61
4.0	.72	.64	.57	.71	.63	.57	.68	.61	.56	.66	.60	.55	.64	.59	.54	.52
5.0	.64	.56	.49	.63	.55	.49	.61	.54	.48	.59	.53	.48	.57	.52	.47	.45
6.0	.58	.49	.43	.57	.49	.43	.55	.48	.42	.54	.47	.42	.52	.46	.42	.40
7.0	.53	.44	.38	.52	.44	.38	.50	.43	.37	.49	.42	.37	.47	.41	.37	.35
8.0	.48	.40	.34	.47	.39	.34	.46	.39	.33	.45	.38	.33	.44	.38	.33	.31
9.0	.44	.36	.30	.43	.36	.30	.42	.35	.30	.41	.35	.30	.40	.34	.30	.28
10.0	.41	.33	.28	.40	.33	.27	.39	.32	.27	.38	.32	.27	.37	.31	.27	.25

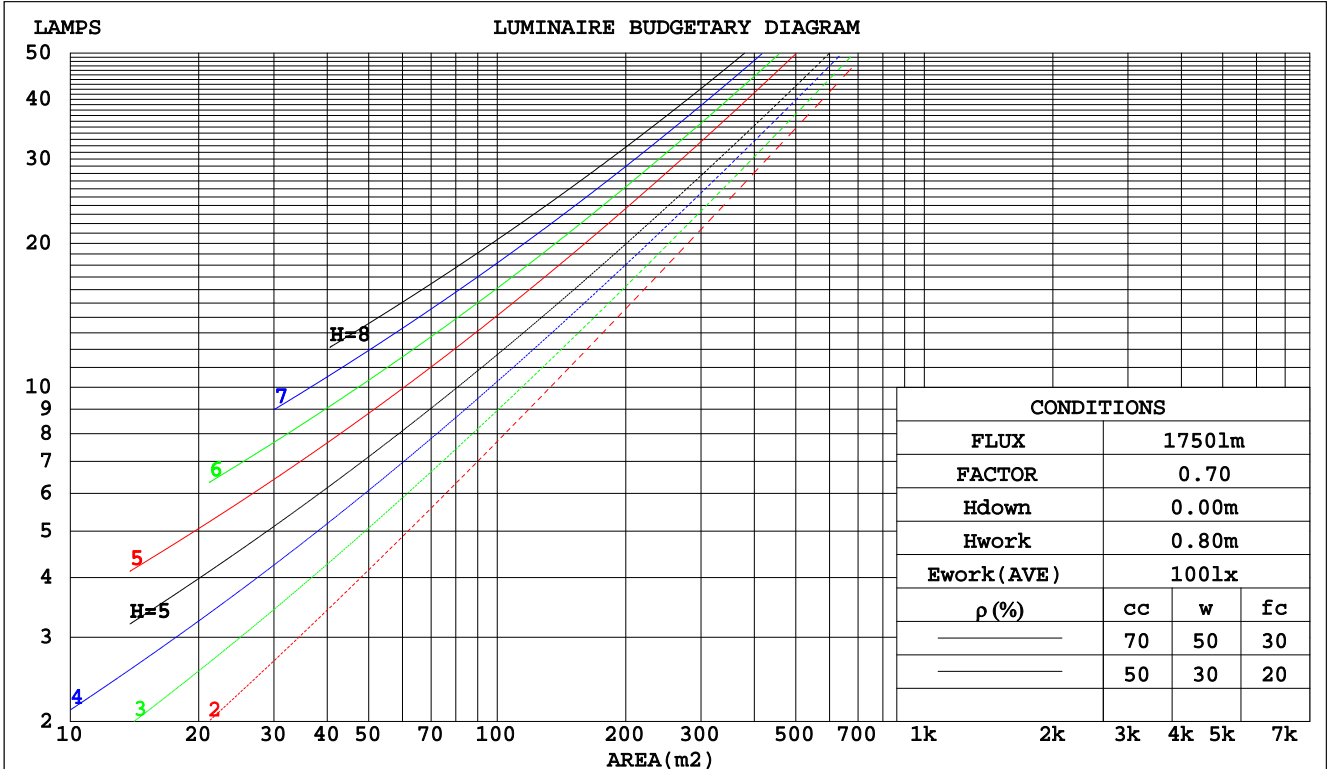

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:24.5DEG  
 Operators:William  
 Test Date:2017-12-16

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.352  
 Humidity:65.7%  
 Test Distance:26.000m [K=1.4470]  
 Remarks:

Checker: DENNY

Assessor: JOE

WEC AND CCEC

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-14W-SW-40	WEIGHT:
SPEC.:14W 4000K	DIM.: L:657mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.282	.161	.051	.275	.157	.050	.262	.150	.048	.250	.144	.046	.239	.138	.045	
2.0	.274	.150	.046	.267	.147	.045	.256	.142	.044	.245	.138	.043	.235	.133	.042	
3.0	.257	.137	.041	.252	.135	.041	.242	.131	.040	.232	.127	.039	.223	.124	.038	
4.0	.240	.125	.037	.235	.123	.036	.226	.120	.036	.218	.117	.035	.210	.114	.035	
5.0	.224	.114	.033	.219	.113	.033	.211	.110	.032	.204	.107	.032	.197	.105	.032	
6.0	.208	.105	.030	.205	.103	.030	.197	.101	.029	.191	.099	.029	.184	.097	.029	
7.0	.195	.096	.027	.191	.095	.027	.185	.093	.027	.179	.092	.027	.173	.090	.026	
8.0	.182	.089	.025	.179	.088	.025	.174	.087	.025	.168	.085	.025	.163	.084	.024	
9.0	.171	.083	.023	.169	.082	.023	.163	.081	.023	.159	.079	.023	.154	.078	.023	
10.0	.161	.077	.021	.159	.077	.021	.154	.076	.021	.150	.074	.021	.146	.073	.021	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.180	.158	.138	.154	.135	.119	.105	.093	.082	.061	.054	.048	.019	.017	.015	
2.0	.171	.133	.101	.147	.115	.088	.100	.079	.061	.058	.046	.036	.019	.015	.012	
3.0	.163	.116	.077	.140	.100	.067	.096	.069	.047	.056	.040	.028	.018	.013	.009	
4.0	.156	.102	.061	.134	.088	.053	.092	.061	.037	.053	.036	.022	.017	.012	.007	
5.0	.149	.092	.049	.128	.079	.043	.088	.055	.030	.051	.033	.018	.016	.011	.006	
6.0	.142	.083	.041	.122	.072	.036	.084	.050	.025	.049	.030	.015	.016	.010	.005	
7.0	.135	.076	.035	.116	.066	.031	.080	.046	.022	.047	.027	.013	.015	.009	.004	
8.0	.129	.071	.030	.111	.061	.027	.077	.043	.019	.045	.025	.011	.014	.008	.004	
9.0	.123	.066	.027	.106	.057	.023	.073	.040	.017	.043	.024	.010	.014	.008	.003	
10.0	.117	.061	.024	.101	.053	.021	.070	.037	.015	.041	.022	.009	.013	.007	.003	

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:24.5DEG  
 Operators:William  
 Test Date:2017-12-16

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.352  
 Humidity:65.7%  
 Test Distance:26.000m [K=1.4470]  
 Remarks:

Checker: DENNY

Assessor: JOE

UGR(Unified Glare Rating) Table

NAME: LED TRI-PROOF LIGHT		TYPE:BAWATY-14W-SW-40					WEIGHT:				
SPEC.:14W 4000K		DIM.: L:657mm					SERIAL No.:				
MFR.: DIMON TECHNOLOGY LTD		SUR.:					Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	Viewed crosswise					Viewed endwise					
x = 2H y = 2H	25.1	26.6	25.4	26.8	27.0	25.1	26.6	25.4	26.8	27.0	
3H	26.2	27.6	26.5	27.8	28.1	26.2	27.6	26.5	27.8	28.0	
4H	26.5	27.8	26.8	28.1	28.3	26.4	27.7	26.8	28.0	28.2	
6H	26.6	27.8	26.9	28.0	28.3	26.5	27.7	26.8	28.0	28.3	
8H	26.5	27.7	26.9	28.0	28.3	26.5	27.6	26.8	27.9	28.2	
12H	26.5	27.6	26.8	27.9	28.2	26.4	27.5	26.8	27.8	28.1	
4H 2H	25.6	26.9	25.9	27.2	27.4	25.6	26.9	25.9	27.2	27.4	
3H	26.9	28.0	27.2	28.3	28.6	26.8	28.0	27.2	28.3	28.6	
4H	27.2	28.3	27.6	28.6	28.9	27.2	28.2	27.5	28.5	28.8	
6H	27.3	28.2	27.7	28.6	29.0	27.3	28.2	27.7	28.5	28.9	
8H	27.3	28.2	27.7	28.5	28.9	27.2	28.1	27.7	28.4	28.8	
12H	27.3	28.0	27.7	28.4	28.8	27.2	28.0	27.6	28.4	28.8	
8H 4H	27.3	28.2	27.7	28.5	28.9	27.3	28.1	27.7	28.5	28.9	
6H	27.5	28.2	27.9	28.6	29.0	27.4	28.1	27.8	28.5	28.9	
8H	27.5	28.1	27.9	28.5	28.9	27.4	28.0	27.9	28.4	28.9	
12H	27.4	28.0	27.9	28.4	28.9	27.4	27.9	27.8	28.3	28.8	
12H 4H	27.3	28.1	27.7	28.4	28.9	27.2	28.0	27.7	28.4	28.8	
6H	27.4	28.1	27.9	28.5	28.9	27.4	28.0	27.8	28.4	28.9	
8H	27.4	28.0	27.9	28.4	28.9	27.4	27.9	27.9	28.3	28.8	
Variations with the observer position at spacings:											
S = 1.0H	+ 0.3 / - 0.3					+ 0.2 / - 0.3					
1.5H	+ 0.2 / - 0.4					+ 0.2 / - 0.4					
2.0H	+ 0.4 / - 0.4					+ 0.4 / - 0.4					

CIE Pub.117, 1750 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 1.9)

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:24.5DEG  
 Operators:William  
 Test Date:2017-12-16

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.352  
 Humidity:65.7%  
 Test Distance:26.000m [K=1.4470]  
 Remarks:

Checker: DENNY

Assessor: JOE

UTILIZATION FACTORS TABLE

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-14W-SW-40	WEIGHT:
SPEC.:14W 4000K	DIM.: L:657mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	59	47	40	58	47	40	57	46	40	34
0.80	69	58	50	68	57	50	66	56	50	43
1.00	78	67	60	76	66	60	74	68	59	52
1.25	85	75	68	83	74	68	81	73	67	60
1.50	90	80	74	88	80	73	85	78	72	65
2.00	97	89	83	95	87	82	91	85	80	73
2.50	100	93	87	98	92	87	95	89	85	77
3.00	104	97	92	101	96	91	98	93	89	81
4.00	107	102	98	105	100	97	101	97	94	85
5.00	110	105	102	107	103	100	103	100	97	88
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:24.5DEG  
 Operators:William  
 Test Date:2017-12-16


$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.352  
 Humidity:65.7%  
 Test Distance:26.000m [K=1.4470]  
 Remarks:

Checker: DENNY

Assessor: JOE

**ISOCANDELA DIAGRAM**

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-14W-SW-40	WEIGHT:
SPEC.:14W 4000K	DIM.: L:657mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

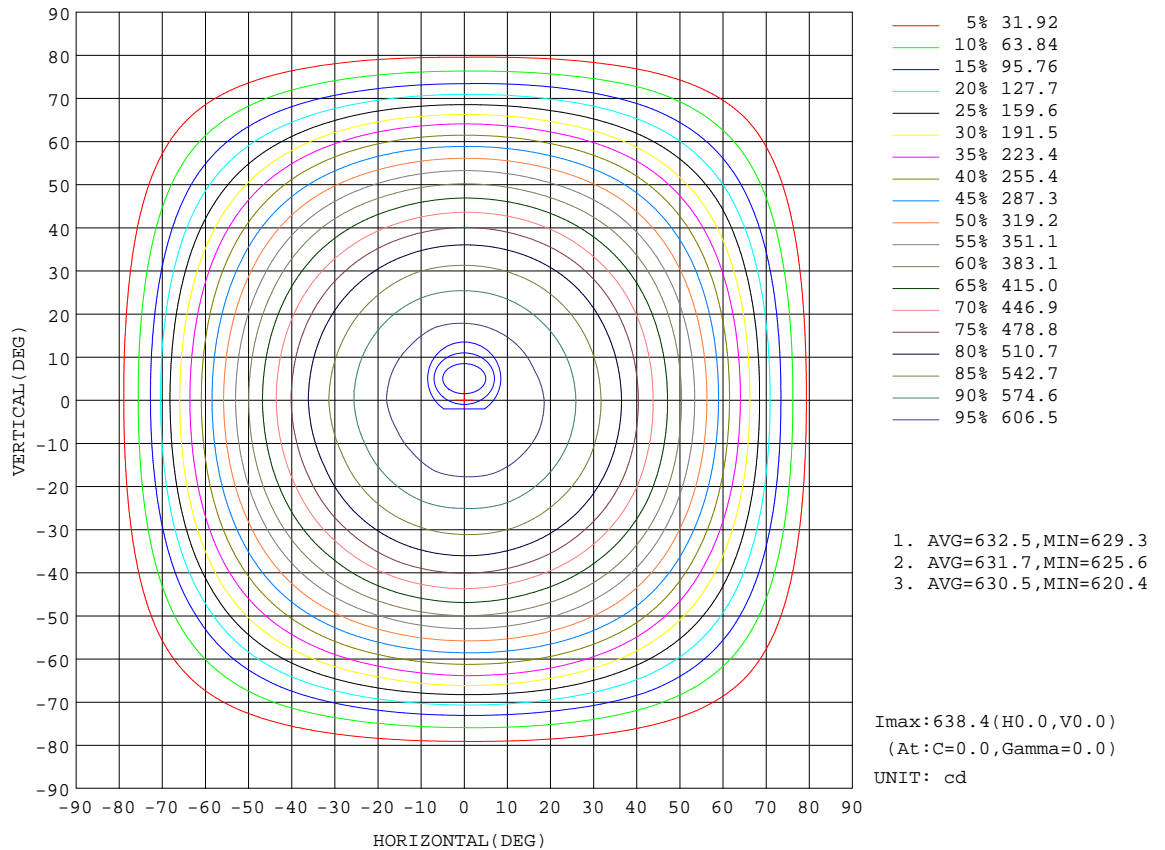

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 24.5DEG  
 Operators: William  
 Test Date: 2017-12-16

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.0.352  
 Humidity: 65.7%  
 Test Distance: 26.000m [K=1.4470]  
 Remarks:


Checker: DENNY

Assessor: JOE



**AAI Figure**

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-14W-SW-40	WEIGHT:
SPEC.:14W 4000K	DIM.: L:657mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

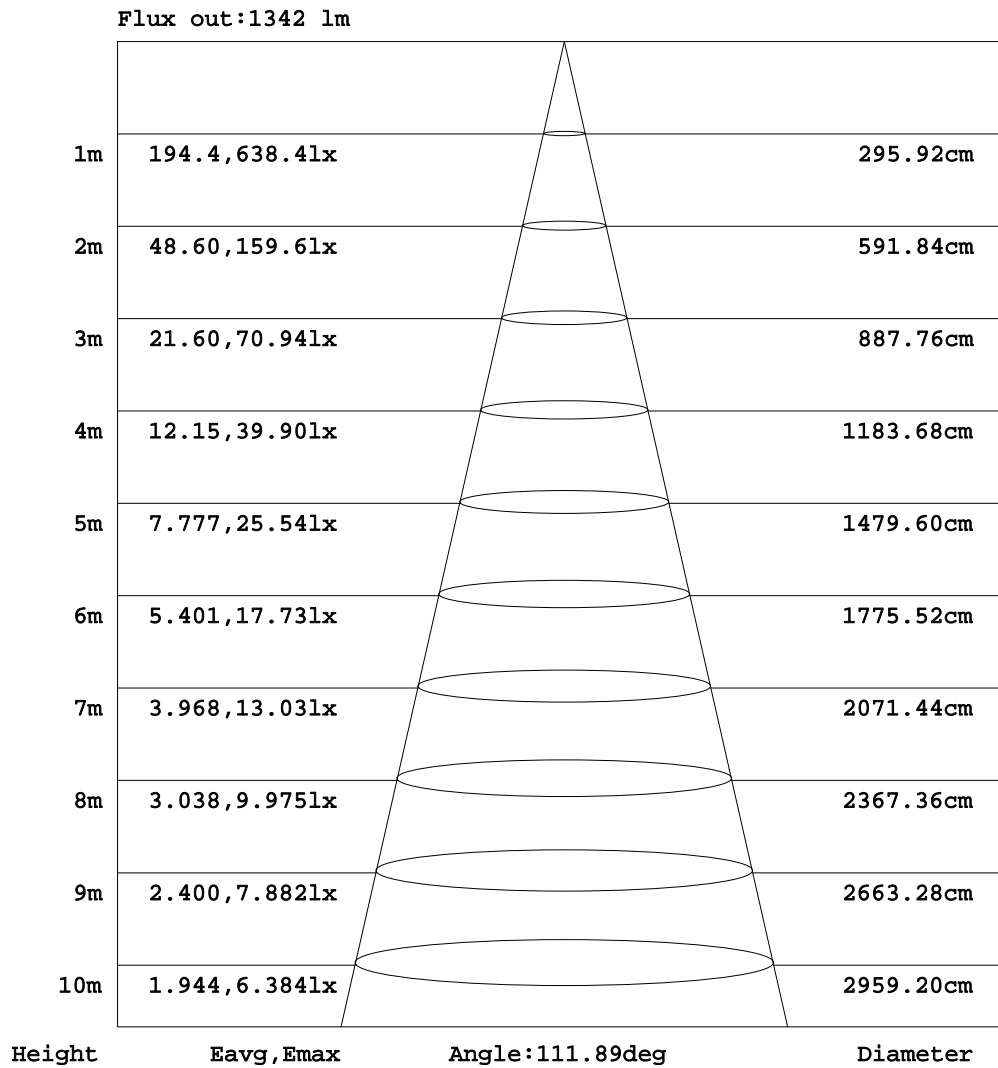

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:24.5DEG  
 Operators:William  
 Test Date:2017-12-16


γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.352  
 Humidity:65.7%  
 Test Distance:26.000m [K=1.4470]  
 Remarks:

Checker: DENNY

Assessor: JOE

**ISOLUX DIAGRAM**

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-14W-SW-40	WEIGHT:
SPEC.:14W 4000K	DIM.: L:657mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

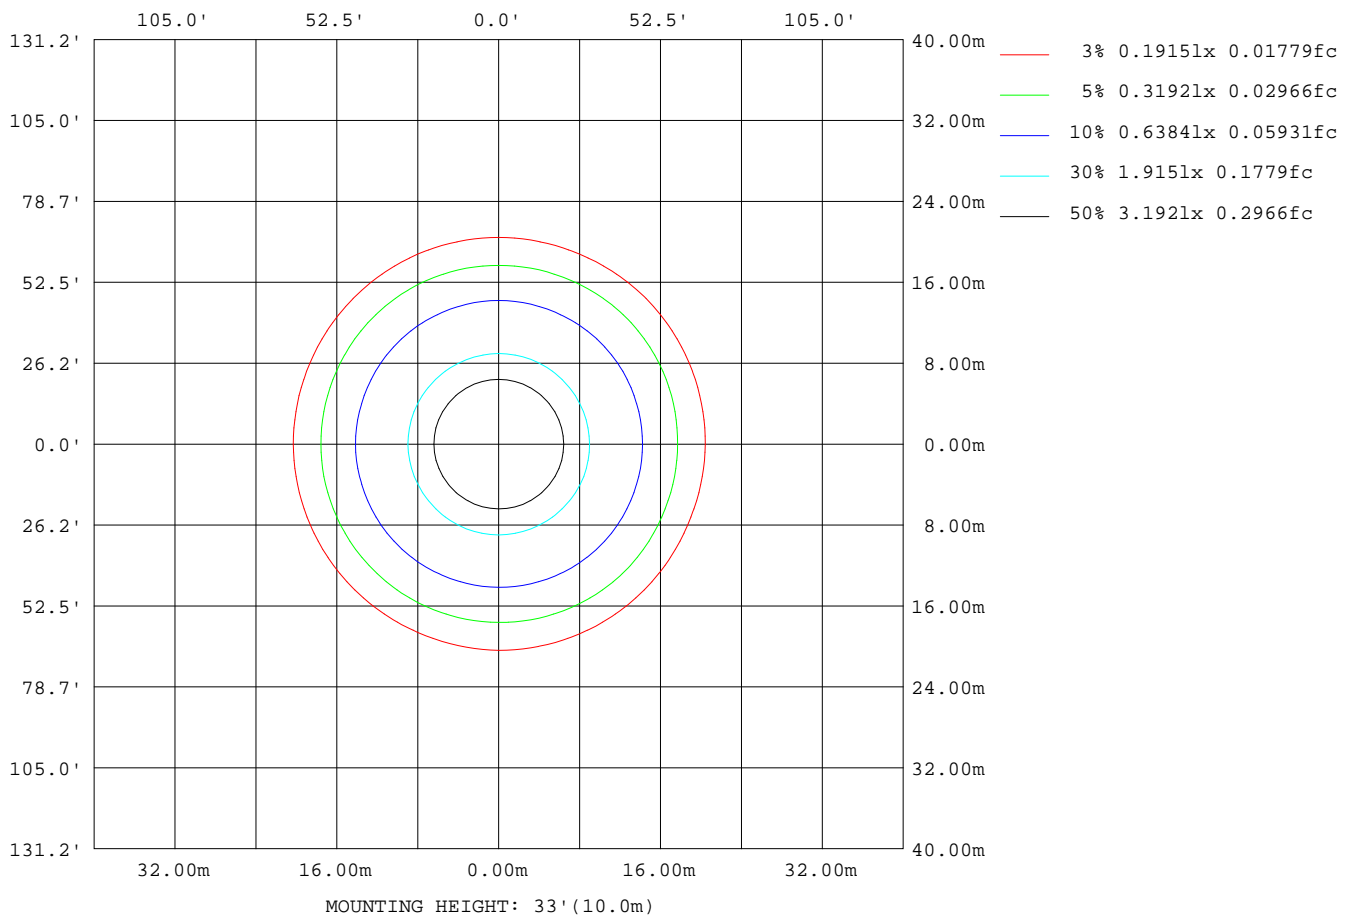


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:24.5DEG  
 Operators:William  
 Test Date:2017-12-16

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.352  
 Humidity:65.7%  
 Test Distance:26.000m [K=1.4470]  
 Remarks:

Checker: DENNY

Assessor: JOE

Planar Illuminance Curve

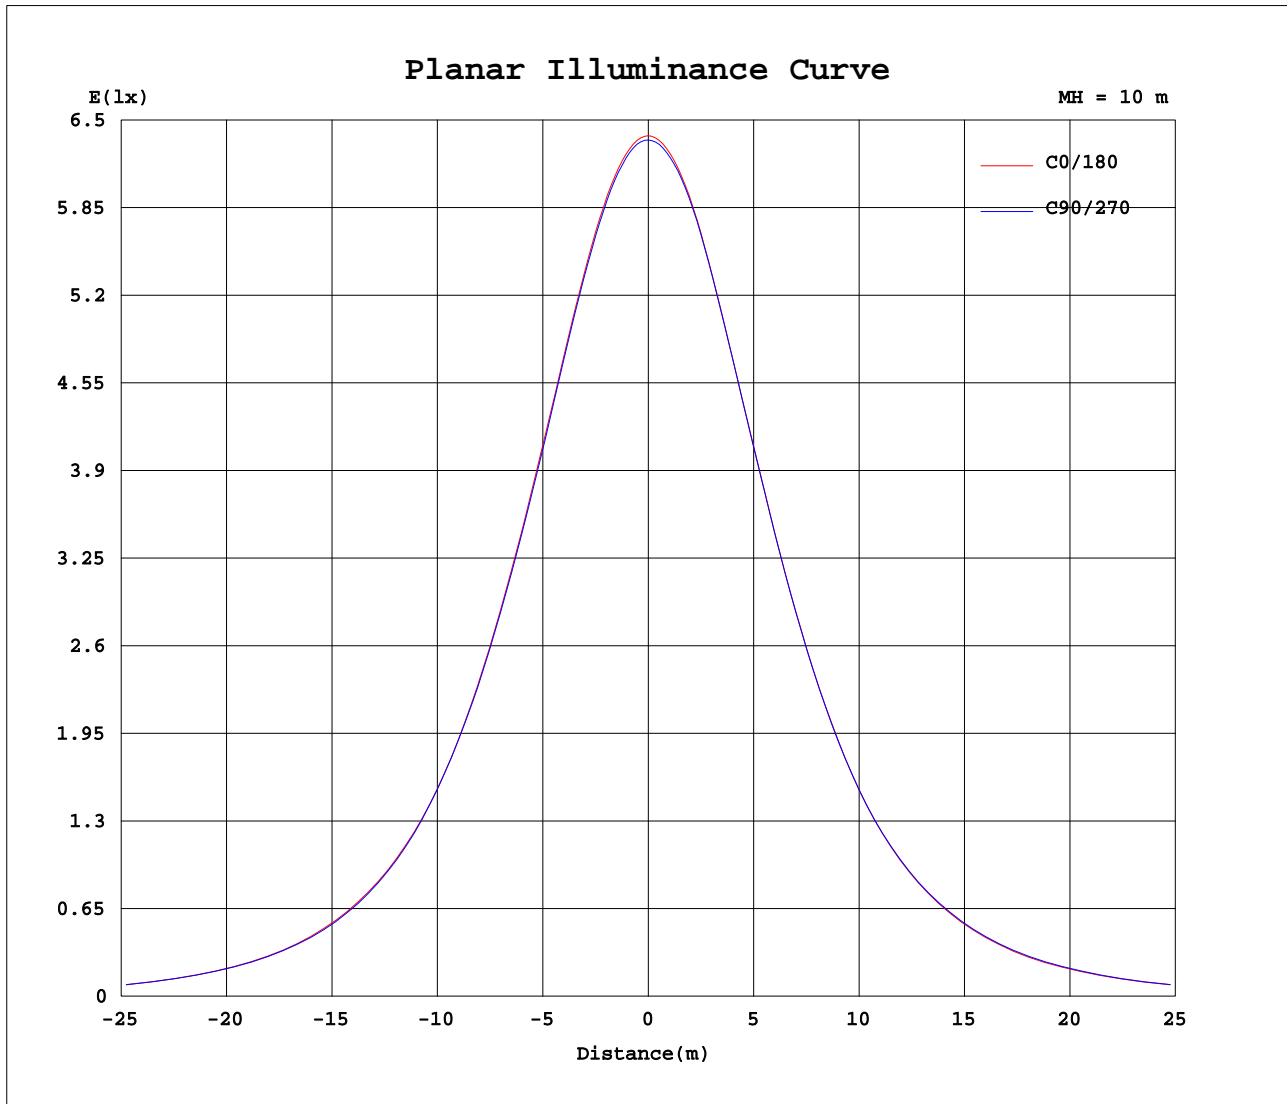

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 24.5DEG  
 Operators: William  
 Test Date: 2017-12-16

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.0.352  
 Humidity: 65.7%  
 Test Distance: 26.000m [K=1.4470]  
 Remarks:

Checker: DENNY

Assessor: JOE

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-14W-SW-40	WEIGHT:
SPEC.:14W 4000K	DIM.: L:657mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C( DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	638	637	637	636	635	635	634	634	638	637	637	636	635	635	634	634			
5	636	635	635	635	633	633	632	632	636	635	634	634	633	633	632	632			
10	630	629	629	629	627	626	625	626	630	628	627	628	628	627	626	626			
15	618	618	617	617	615	615	613	614	617	616	615	617	616	615	615	615			
20	601	601	601	600	598	598	596	595	599	599	598	600	598	598	598	598			
25	579	579	578	578	575	576	575	575	577	577	577	578	576	576	576	577			
30	553	553	552	552	549	549	548	547	552	550	550	551	551	551	550	551			
35	522	521	520	520	518	517	516	514	519	518	517	517	518	518	519	520			
40	482	482	480	479	480	479	476	476	480	479	477	477	479	479	480	481			
45	435	438	434	432	435	432	429	429	433	432	431	431	433	434	433	435			
50	387	387	385	383	383	380	380	380	383	381	383	383	385	384	386	387			
55	333	332	333	331	329	326	327	325	328	327	330	330	332	331	334	334			
60	274	272	275	273	271	268	267	267	268	268	272	273	273	274	278	278			
65	210	206	208	208	209	203	203	204	205	205	206	209	211	210	213	213			
70	140	140	140	139	136	135	135	130	134	136	137	139	140	142	145	146			
75	78.0	78.6	77.9	76.6	73.6	73.2	72.4	69.1	70.4	75.8	78.1	77.5	78.8	80.2	84.2	82.5			
80	26.0	27.9	27.2	26.3	26.5	24.8	25.8	22.7	24.6	26.5	28.2	29.5	27.3	30.7	31.5	31.3			
85	4.72	4.25	4.03	3.63	3.24	3.17	2.99	3.12	3.35	4.17	4.37	5.36	4.66	4.83	5.12	5.77			
90	0.11	0.10	0.06	0.07	0.06	0.07	0.07	0.06	0.04	0.51	0.04	0.04	0.19	0.01	0.55	0.20			
95	0.04	0.04	0.05	0.06	0.05	0.05	0.04	0.04	0.06	0.16	0.05	0.06	0.04	0.05	0.04	0.06			
100	0.04	0.04	0.05	0.06	0.05	0.06	0.05	0.05	0.13	0.12	0.13	0.13	0.12	0.11	0.11	0.11			
105	0.03	0.05	0.05	0.06	0.06	0.07	0.05	0.05	0.22	0.21	0.21	0.22	0.21	0.22	0.22	0.21			
110	0.03	0.05	0.04	0.07	0.07	0.08	0.05	0.05	0.35	0.30	0.32	0.33	0.33	0.33	0.32	0.32			
115	0.07	0.09	0.08	0.09	0.10	0.07	0.07	0.10	0.46	0.43	0.44	0.44	0.45	0.44	0.44	0.45			
120	0.22	0.18	0.22	0.21	0.19	0.15	0.18	0.17	0.55	0.54	0.52	0.49	0.55	0.54	0.57	0.53			
125	0.33	0.30	0.29	0.36	0.35	0.32	0.27	0.29	0.58	0.58	0.53	0.50	0.58	0.56	0.59	0.58			
130	0.47	0.44	0.44	0.50	0.48	0.44	0.37	0.45	0.66	0.60	0.57	0.54	0.60	0.58	0.61	0.61			
135	0.66	0.57	0.58	0.67	0.65	0.60	0.47	0.56	0.69	0.61	0.60	0.64	0.69	0.62	0.66	0.67			
140	0.87	0.79	0.76	0.90	0.87	0.87	0.68	0.82	0.76	0.69	0.64	0.71	0.72	0.74	0.72	0.72			
145	0.98	0.94	0.91	1.05	1.01	0.98	0.89	0.90	0.83	0.76	0.72	0.83	0.87	0.87	0.80	0.82			
150	1.08	1.09	1.09	1.12	1.11	1.12	1.03	0.99	0.94	0.89	0.86	0.99	1.00	1.00	1.00	0.94			
155	1.15	1.18	1.16	1.18	1.12	1.14	1.14	1.10	1.08	1.04	1.02	1.11	1.07	1.10	1.06	1.10			
160	1.20	1.19	1.20	1.20	1.18	1.18	1.16	1.15	1.15	1.12	1.11	1.17	1.21	1.14	1.15	1.13			
165	1.33	1.29	1.29	1.32	1.33	1.25	1.26	1.26	1.19	1.21	1.18	1.21	1.25	1.22	1.25	1.19			
170	1.36	1.35	1.38	1.43	1.44	1.37	1.34	1.36	1.27	1.29	1.27	1.33	1.33	1.36	1.39	1.29			
175	1.45	1.40	1.48	1.51	1.51	1.43	1.44	1.40	1.41	1.39	1.39	1.44	1.43	1.43	1.43	1.39			
180	1.48	1.41	1.48	1.53	1.48	1.43	1.44	1.40	1.44	1.48	1.41	1.48	1.50	1.50	1.43	1.44			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:24.5DEG  
 Operators:William  
 Test Date:2017-12-16

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.352  
 Humidity:65.7%  
 Test Distance:26.000m [K=1.4470]  
 Remarks:

Checker: DENNY

Assessor: JOE