
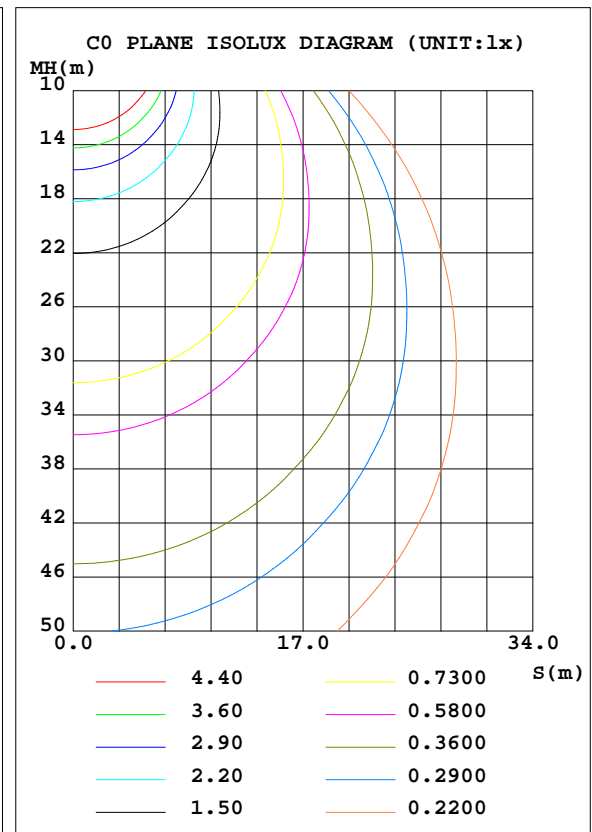


LUMINAIRE PHOTOMETRIC TEST REPORT

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-16W-SW-40	WEIGHT:
SPEC.:16W 4000K	DIM.: L:657mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 125.00 lm/W			
MODEL	BAWATY-16W-SW-40	Imax(cd)	729.6	S/MH(C0/180)	1.28
NOMINAL POWER(W)	16	LOR(%)	100.0	S/MH(C90/270)	1.29
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	2000.0	$\eta$ UP, DN(C0-180)	0.1,49.8
NOMINAL FLUX(lm)	2000	CIE CLASS	DIRECT	$\eta$ UP, DN(C180-360)	0.1,50.0
LAMPS INSIDE	1	$\eta$ up(%)	0.2	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	220	$\eta$ down(%)	99.8	CIBSE SHR MAX	1.35

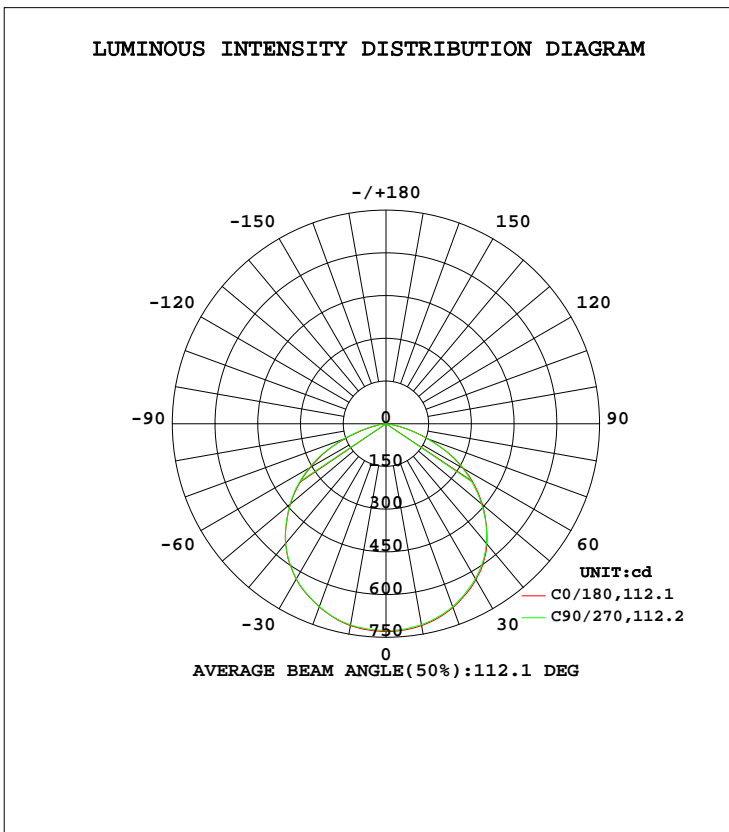

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:24.5DEG  
 Operators:William  
 Test Date:2017-12-16

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.352  
 Humidity:65.7%  
 Test Distance:26.000m [K=1.4470]  
 Remarks:

Checker: DENNY

Assessor: JOE

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	719.6	719.4	716.3	714.3	719.4	716.9	717.2	715.6	0- 10	68.91	68.91	3.45,3.45
20	686.9	686.3	683.4	680.9	684.2	683.7	683.6	683.1	10- 20	198.7	267.6	13.4,13.4
30	631.8	630.4	627.8	626.0	630.4	628.1	629.5	629.0	20- 30	304.0	571.6	28.6,28.6
40	550.9	548.2	548.3	543.8	548.7	545.5	547.9	548.6	30- 40	370.2	941.8	47.1,47.1
50	442.2	439.9	437.5	433.7	437.6	438.1	440.0	441.2	40- 50	381.5	1323	66.2,66.2
60	313.7	314.6	309.6	305.5	306.0	310.4	312.2	317.8	50- 60	336.7	1660	83,83
70	159.9	160.1	155.5	153.7	152.8	156.5	160.3	166.1	60- 70	233.2	1893	94.7,94.7
80	29.74	31.05	30.25	29.53	28.06	32.25	31.25	36.03	70- 80	94.29	1987	99.4,99.4
90	0.1301	0.0690	0.0649	0.0792	0.0471	0.0470	0.2208	0.6274	80- 90	9.323	1997	99.8,99.8
100	0.0413	0.0570	0.0614	0.0531	0.1433	0.1430	0.1427	0.1268	90-100	0.0895	1997	99.8,99.8
110	0.0328	0.0483	0.0762	0.0610	0.3959	0.3642	0.3805	0.3654	100-110	0.1622	1997	99.8,99.8
120	0.2525	0.2524	0.2215	0.2046	0.6234	0.5909	0.6341	0.6501	110-120	0.3004	1997	99.9,99.9
130	0.5379	0.5065	0.5541	0.4271	0.7596	0.6543	0.6879	0.6973	120-130	0.4524	1998	99.9,99.9
140	0.9933	0.8701	0.9985	0.7760	0.8708	0.7283	0.8253	0.8236	130-140	0.5537	1998	99.9,99.9
150	1.234	1.250	1.267	1.172	1.077	0.9815	1.141	1.140	140-150	0.6363	1999	99.9,99.9
160	1.370	1.377	1.347	1.330	1.312	1.263	1.379	1.315	150-160	0.5798	1999	100,100
170	1.551	1.582	1.648	1.536	1.456	1.457	1.519	1.584	160-170	0.4027	2000	100,100
180	1.693	1.693	1.697	1.647	1.646	1.614	1.712	1.631	170-180	0.1532	2000	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 1134.9 lm

%lum = 56.7%  
 %lamp = 56.7%

Conical surface Flux(120deg): 1659.9 lm

%lum = 83.0%  
 %lamp = 83.0%

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:24.5DEG  
 Operators:William  
 Test Date:2017-12-16


γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.352  
 Humidity:65.7%  
 Test Distance:26.000m [K=1.4470]  
 Remarks:

Checker: DENNY

Assessor: JOE

LUMINANCE LIMITATION CURVES

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-16W-SW-40	WEIGHT:
SPEC.:16W 4000K	DIM.: L:657mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

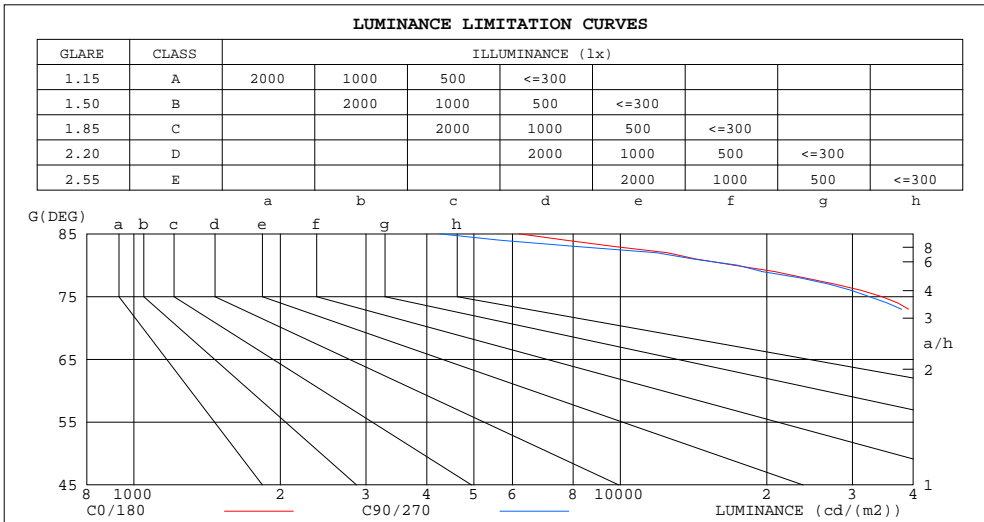

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	6189	4250
80	17127	17420
75	34429	32478
70	46765	45471
65	56728	56527
60	62737	61928
55	66417	65456
50	68799	68064
45	70371	70226

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:24.5DEG  
 Operators:William  
 Test Date:2017-12-16

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.352  
 Humidity:65.7%  
 Test Distance:26.000m [K=1.4470]  
 Remarks:


Checker: DENNY

Assessor: JOE

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-16W-SW-40	WEIGHT:
SPEC.:16W 4000K	DIM.: L:657mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pw																
pfc																
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.05	1.01	.98	1.03	.99	.96	.99	.96	.93	.95	.92	.90	.91	.89	.88	.86
2.0	.92	.86	.80	.90	.84	.79	.87	.82	.78	.84	.79	.76	.81	.77	.74	.72
3.0	.81	.73	.67	.80	.72	.67	.77	.71	.65	.74	.69	.64	.71	.67	.63	.61
4.0	.72	.64	.57	.71	.63	.57	.68	.61	.56	.66	.60	.55	.64	.59	.54	.52
5.0	.64	.56	.49	.63	.55	.49	.61	.54	.48	.59	.53	.48	.57	.52	.47	.45
6.0	.58	.49	.43	.57	.49	.43	.55	.48	.42	.54	.47	.42	.52	.46	.42	.40
7.0	.53	.44	.38	.52	.44	.38	.50	.43	.37	.49	.42	.37	.47	.41	.37	.35
8.0	.48	.40	.34	.47	.39	.34	.46	.39	.33	.45	.38	.33	.44	.38	.33	.31
9.0	.44	.36	.30	.43	.36	.30	.42	.35	.30	.41	.35	.30	.40	.34	.30	.28
10.0	.41	.33	.28	.40	.33	.27	.39	.32	.27	.38	.32	.27	.37	.31	.27	.25

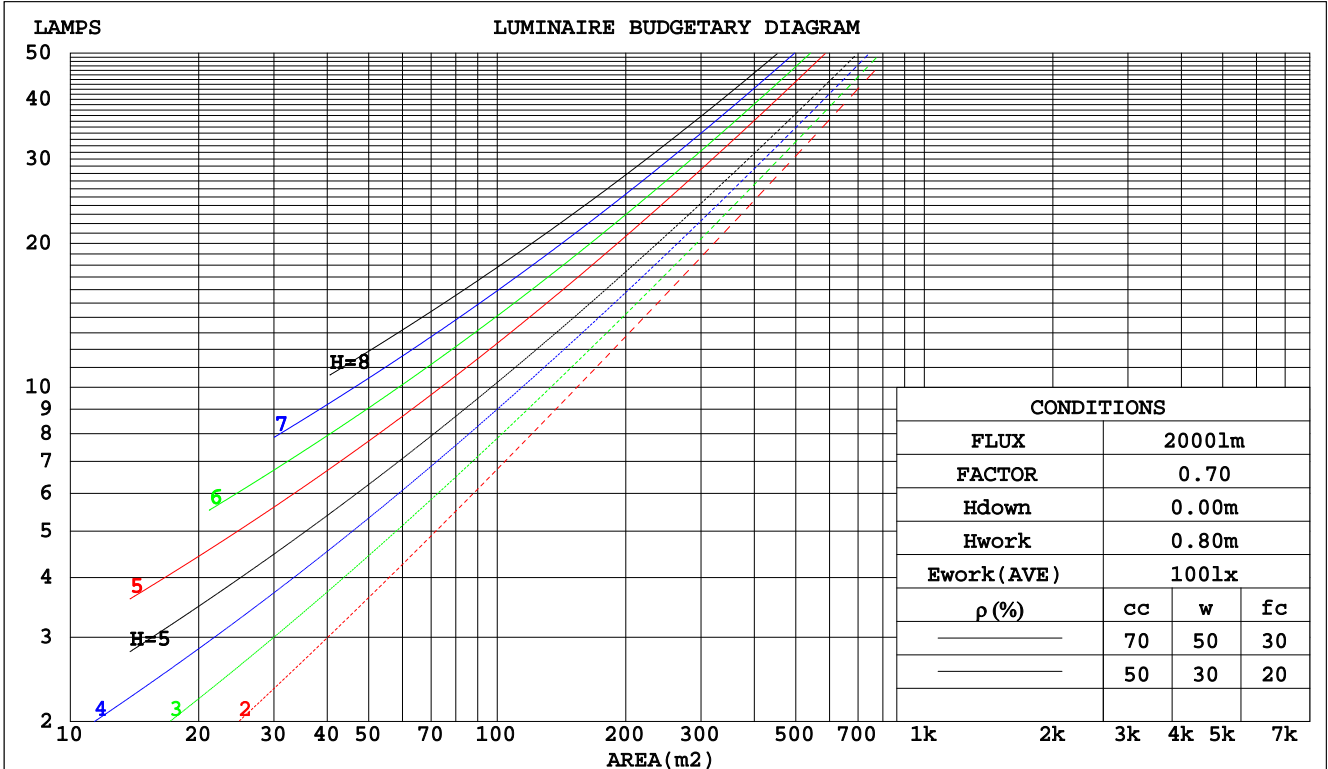

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:24.5DEG  
 Operators:William  
 Test Date:2017-12-16

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.352  
 Humidity:65.7%  
 Test Distance:26.000m [K=1.4470]  
 Remarks:

Checker: DENNY

Assessor: JOE

WEC AND CCEC

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-16W-SW-40	WEIGHT:
SPEC.:16W 4000K	DIM.: L:657mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.282	.161	.051	.275	.157	.050	.262	.150	.048	.250	.144	.046	.239	.138	.045	
2.0	.274	.150	.046	.267	.147	.045	.256	.142	.044	.245	.138	.043	.235	.133	.042	
3.0	.257	.137	.041	.252	.135	.041	.242	.131	.040	.232	.127	.039	.223	.124	.038	
4.0	.240	.125	.037	.235	.123	.036	.226	.120	.036	.218	.117	.035	.210	.114	.035	
5.0	.224	.114	.033	.219	.113	.033	.211	.110	.032	.204	.107	.032	.197	.105	.032	
6.0	.208	.105	.030	.205	.103	.030	.197	.101	.029	.191	.099	.029	.184	.097	.029	
7.0	.195	.096	.027	.191	.095	.027	.185	.093	.027	.179	.092	.027	.173	.090	.026	
8.0	.182	.089	.025	.179	.088	.025	.174	.087	.025	.168	.085	.025	.163	.084	.024	
9.0	.171	.083	.023	.169	.082	.023	.163	.081	.023	.159	.079	.023	.154	.078	.023	
10.0	.161	.077	.021	.159	.077	.021	.154	.076	.021	.150	.074	.021	.146	.073	.021	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.180	.158	.138	.154	.135	.119	.105	.093	.082	.061	.054	.048	.019	.017	.015	
2.0	.171	.133	.101	.147	.115	.088	.100	.079	.061	.058	.046	.036	.019	.015	.012	
3.0	.163	.116	.077	.140	.100	.067	.096	.069	.047	.056	.040	.028	.018	.013	.009	
4.0	.156	.102	.061	.134	.088	.053	.092	.061	.037	.053	.036	.022	.017	.012	.007	
5.0	.149	.092	.049	.128	.079	.043	.088	.055	.030	.051	.033	.018	.016	.011	.006	
6.0	.142	.083	.041	.122	.072	.036	.084	.050	.025	.049	.030	.015	.016	.010	.005	
7.0	.135	.076	.035	.116	.066	.031	.080	.046	.022	.047	.027	.013	.015	.009	.004	
8.0	.129	.071	.030	.111	.061	.027	.077	.043	.019	.045	.025	.011	.014	.008	.004	
9.0	.123	.066	.027	.106	.057	.023	.073	.040	.017	.043	.024	.010	.014	.008	.003	
10.0	.117	.061	.024	.101	.053	.021	.070	.037	.015	.041	.022	.009	.013	.007	.003	

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:24.5DEG  
 Operators:William  
 Test Date:2017-12-16

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.352  
 Humidity:65.7%  
 Test Distance:26.000m [K=1.4470]  
 Remarks:

Checker: DENNY

Assessor: JOE

UGR(Unified Glare Rating) Table

NAME: LED TRI-PROOF LIGHT		TYPE:BAWATY-16W-SW-40					WEIGHT:				
SPEC.:16W 4000K		DIM.: L:657mm					SERIAL No.:				
MFR.: DIMON TECHNOLOGY LTD		SUR.:					Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	Viewed crosswise					Viewed endwise					
x = 2H y = 2H	25.1	26.6	25.4	26.8	27.0	25.1	26.6	25.4	26.8	27.0	
3H	26.2	27.6	26.5	27.8	28.1	26.2	27.6	26.5	27.8	28.0	
4H	26.5	27.8	26.8	28.1	28.3	26.4	27.7	26.8	28.0	28.2	
6H	26.6	27.8	26.9	28.0	28.3	26.5	27.7	26.8	28.0	28.3	
8H	26.5	27.7	26.9	28.0	28.3	26.5	27.6	26.8	27.9	28.2	
12H	26.5	27.6	26.8	27.9	28.2	26.4	27.5	26.8	27.8	28.1	
4H 2H	25.6	26.9	25.9	27.2	27.4	25.6	26.9	25.9	27.2	27.4	
3H	26.9	28.0	27.2	28.3	28.6	26.8	28.0	27.2	28.3	28.6	
4H	27.2	28.3	27.6	28.6	28.9	27.2	28.2	27.5	28.5	28.8	
6H	27.3	28.2	27.7	28.6	29.0	27.3	28.2	27.7	28.5	28.9	
8H	27.3	28.2	27.7	28.5	28.9	27.2	28.1	27.7	28.4	28.8	
12H	27.3	28.0	27.7	28.4	28.8	27.2	28.0	27.6	28.4	28.8	
8H 4H	27.3	28.2	27.7	28.5	28.9	27.3	28.1	27.7	28.5	28.9	
6H	27.5	28.2	27.9	28.6	29.0	27.4	28.1	27.8	28.5	28.9	
8H	27.5	28.1	27.9	28.5	28.9	27.4	28.0	27.9	28.4	28.9	
12H	27.4	28.0	27.9	28.4	28.9	27.4	27.9	27.8	28.3	28.8	
12H 4H	27.3	28.1	27.7	28.4	28.9	27.2	28.0	27.7	28.4	28.8	
6H	27.4	28.1	27.9	28.5	28.9	27.4	28.0	27.8	28.4	28.9	
8H	27.4	28.0	27.9	28.4	28.9	27.4	27.9	27.9	28.3	28.8	
Variations with the observer position at spacings:											
S = 1.0H	+ 0.3 / - 0.3					+ 0.2 / - 0.3					
1.5H	+ 0.2 / - 0.4					+ 0.2 / - 0.4					
2.0H	+ 0.4 / - 0.4					+ 0.4 / - 0.4					

CIE Pub.117, 2000 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 2.4)

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:24.5DEG  
 Operators:William  
 Test Date:2017-12-16

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.352  
 Humidity:65.7%  
 Test Distance:26.000m [K=1.4470]  
 Remarks:

Checker: DENNY

Assessor: JOE

UTILIZATION FACTORS TABLE

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-16W-SW-40	WEIGHT:
SPEC.:16W 4000K	DIM.: L:657mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	59	47	40	58	47	40	57	46	40	34
0.80	69	58	50	68	57	50	66	56	50	43
1.00	78	67	60	76	66	60	74	68	59	52
1.25	85	75	68	83	74	68	81	73	67	60
1.50	90	80	74	88	80	73	85	78	72	65
2.00	97	89	83	95	87	82	91	85	80	73
2.50	100	93	87	98	92	87	95	89	85	77
3.00	104	97	92	101	96	91	98	93	89	81
4.00	107	102	98	105	100	97	101	97	94	85
5.00	110	105	102	107	103	100	103	100	97	88
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:24.5DEG  
 Operators:William  
 Test Date:2017-12-16


$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.352  
 Humidity:65.7%  
 Test Distance:26.000m [K=1.4470]  
 Remarks:

Checker: DENNY

Assessor: JOE

**ISOCANDELA DIAGRAM**

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-16W-SW-40	WEIGHT:
SPEC.:16W 4000K	DIM.: L:657mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

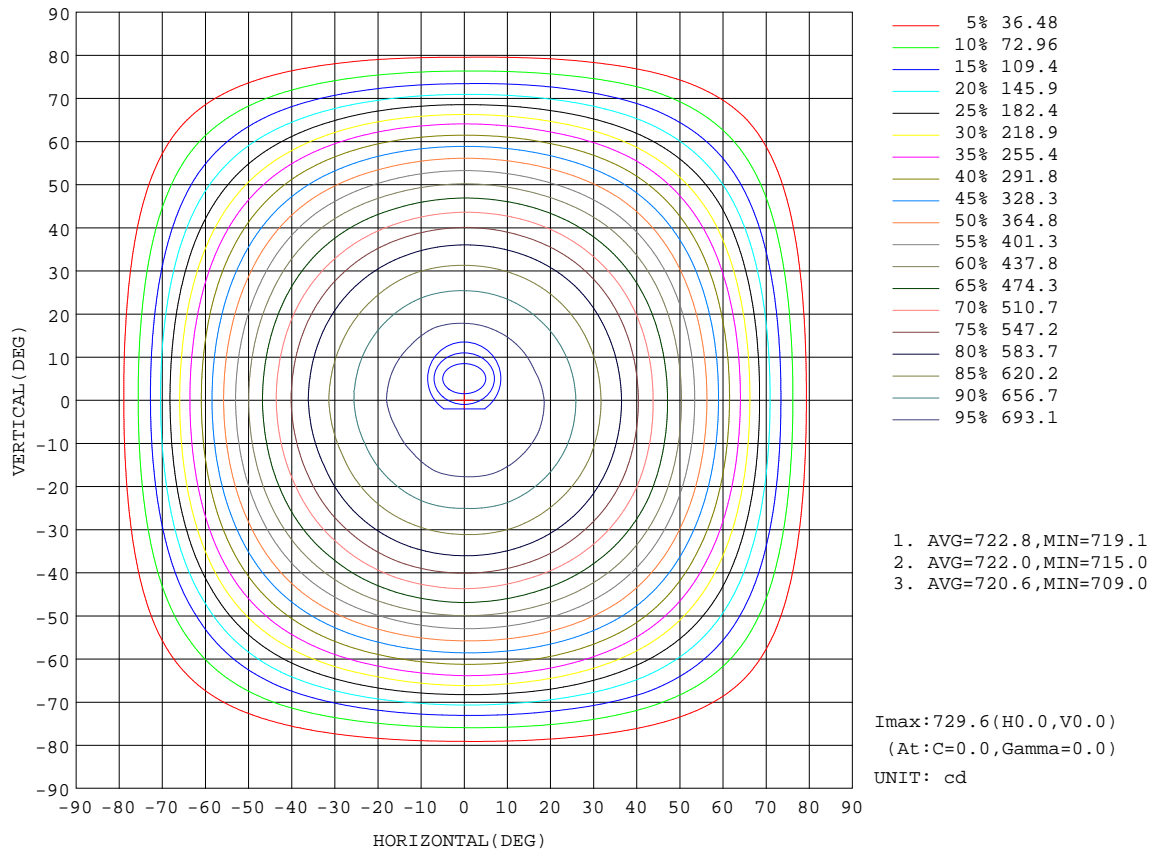

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 24.5DEG  
 Operators: William  
 Test Date: 2017-12-16

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.0.352  
 Humidity: 65.7%  
 Test Distance: 26.000m [K=1.4470]  
 Remarks:


Checker: DENNY

Assessor: JOE



**AAI Figure**

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-16W-SW-40	WEIGHT:
SPEC.:16W 4000K	DIM.: L:657mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

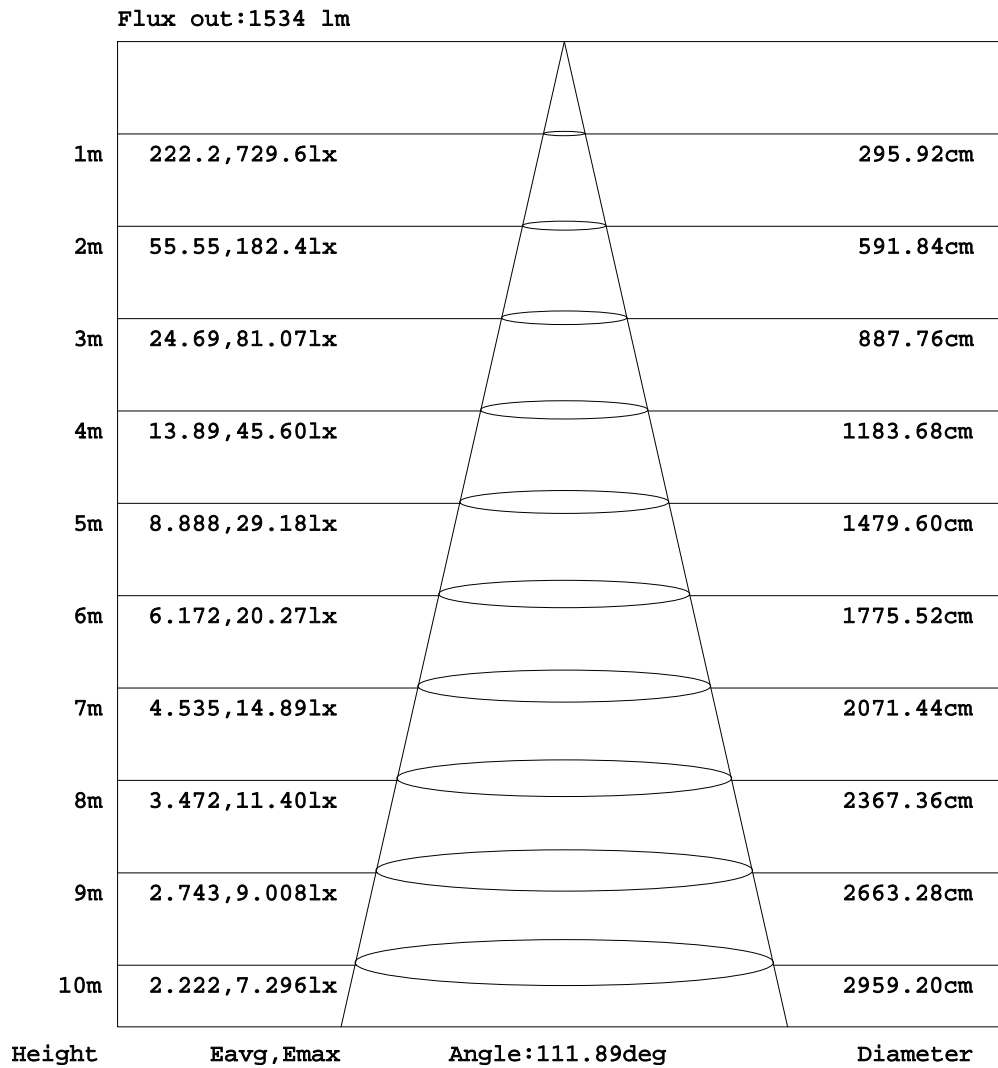

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:24.5DEG  
 Operators:William  
 Test Date:2017-12-16


γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.352  
 Humidity:65.7%  
 Test Distance:26.000m [K=1.4470]  
 Remarks:

Checker: DENNY

Assessor: JOE

**ISOLUX DIAGRAM**

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-16W-SW-40	WEIGHT:
SPEC.:16W 4000K	DIM.: L:657mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

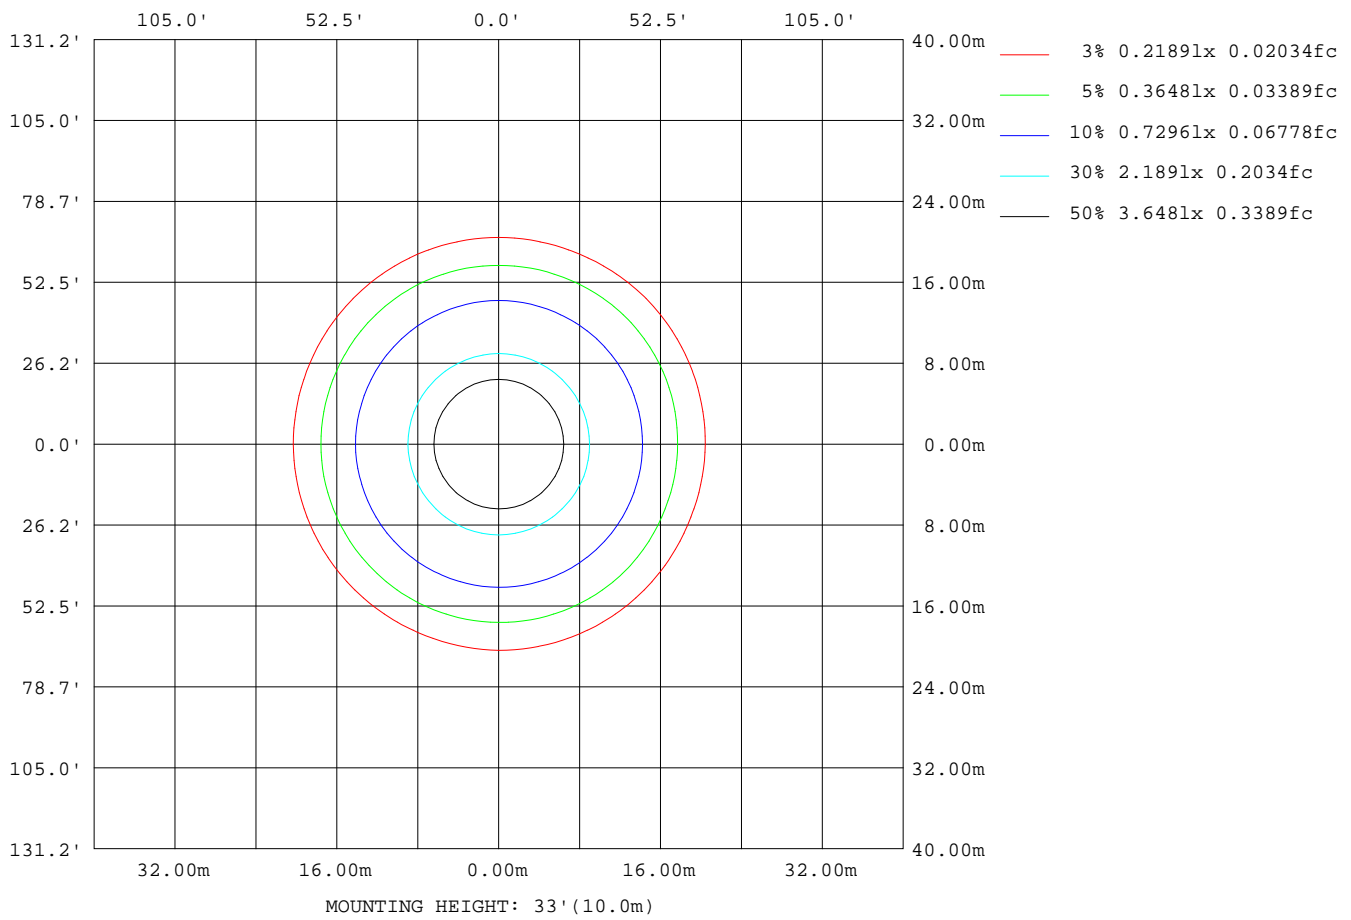


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:24.5DEG  
 Operators:William  
 Test Date:2017-12-16

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.352  
 Humidity:65.7%  
 Test Distance:26.000m [K=1.4470]  
 Remarks:

Checker: DENNY

Assessor: JOE

Planar Illuminance Curve

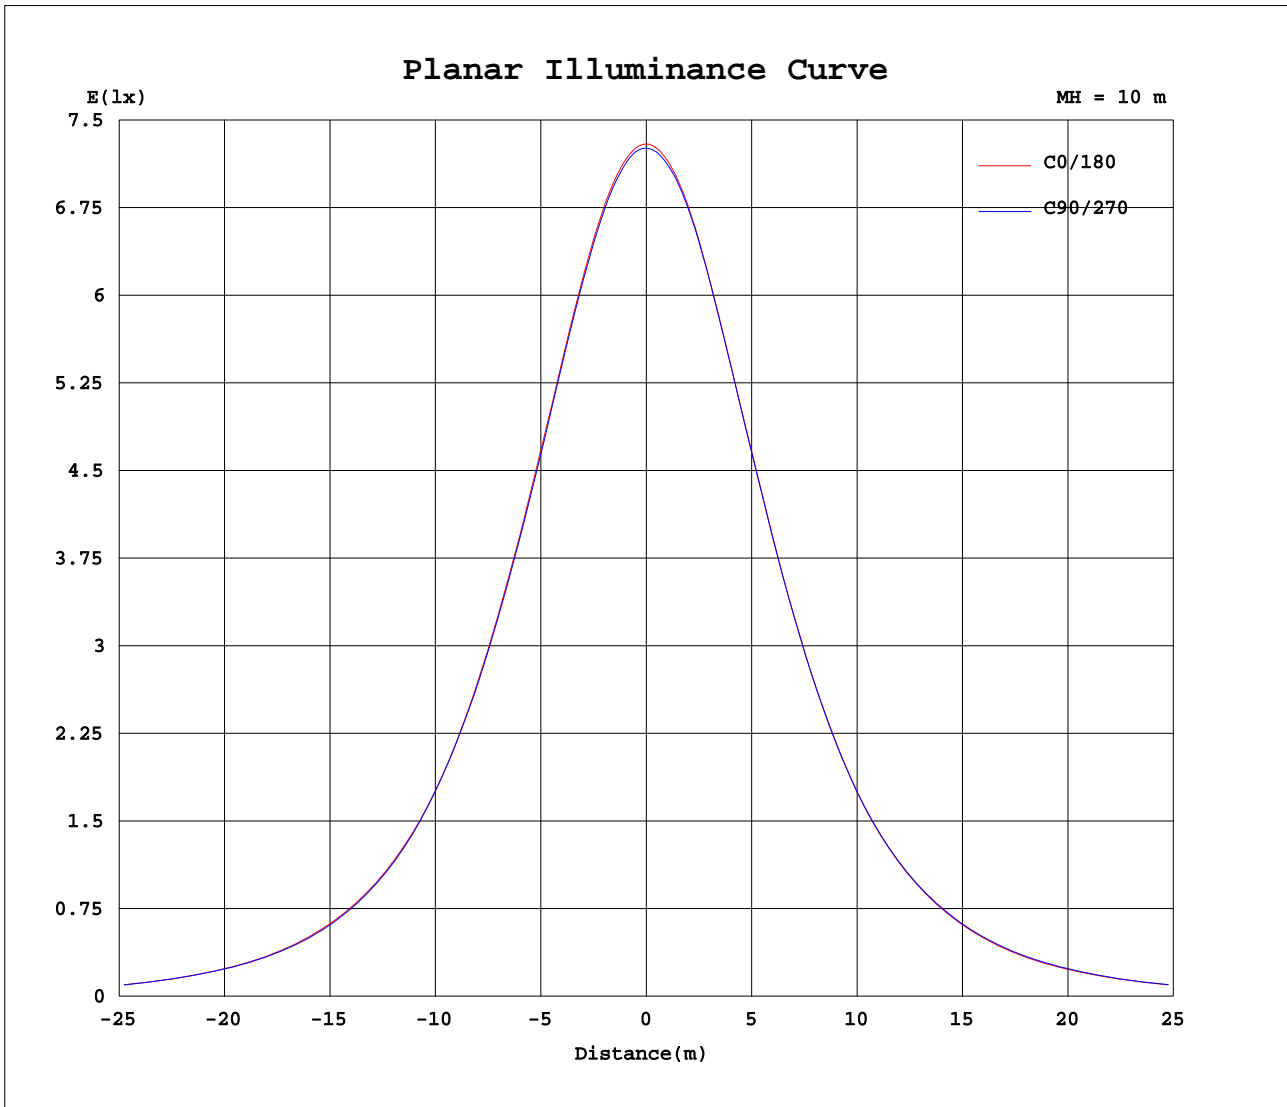

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 24.5DEG  
 Operators: William  
 Test Date: 2017-12-16

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.0.352  
 Humidity: 65.7%  
 Test Distance: 26.000m [K=1.4470]  
 Remarks:

Checker: DENNY

Assessor: JOE

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-16W-SW-40	WEIGHT:
SPEC.:16W 4000K	DIM.: L:657mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C( DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	730	729	728	727	726	725	725	724	730	729	728	727	726	725	725	724			
5	727	726	726	725	724	723	722	722	727	725	725	724	723	723	723	722			
10	720	719	719	718	716	716	714	715	719	718	717	717	717	716	716	715			
15	706	706	706	705	702	703	701	702	705	704	703	705	704	703	703	702			
20	687	687	686	686	683	684	681	680	684	684	684	685	684	683	683	684			
25	661	662	661	660	657	658	657	657	660	660	660	660	659	659	658	660			
30	632	632	630	631	628	627	626	626	630	628	628	630	629	629	629	630			
35	596	595	594	594	592	591	589	588	593	592	591	591	592	592	593	594			
40	551	551	548	548	548	548	544	544	549	548	545	546	548	547	549	550			
45	498	500	496	494	497	494	490	491	494	494	492	492	495	496	495	497			
50	442	443	440	438	438	435	434	435	438	435	438	437	440	439	441	442			
55	381	380	381	378	375	373	373	372	375	374	377	377	380	379	382	381			
60	314	311	315	312	310	307	305	305	306	306	310	312	312	313	318	317			
65	240	236	237	238	239	231	232	233	235	234	235	239	241	240	243	243			
70	160	160	160	159	156	155	154	148	153	156	156	159	160	162	166	167			
75	89.1	89.8	89.0	87.6	84.1	83.7	82.8	79.0	80.4	86.6	89.2	88.6	90.0	91.7	96.3	94.3			
80	29.7	31.8	31.1	30.1	30.2	28.4	29.5	26.0	28.1	30.3	32.3	33.7	31.3	35.0	36.0	35.8			
85	5.39	4.86	4.60	4.14	3.70	3.62	3.41	3.57	3.83	4.77	4.99	6.13	5.32	5.51	5.85	6.59			
90	0.13	0.11	0.07	0.08	0.06	0.08	0.08	0.06	0.05	0.58	0.05	0.05	0.22	0.02	0.63	0.23			
95	0.05	0.04	0.06	0.07	0.05	0.05	0.05	0.05	0.06	0.19	0.06	0.06	0.05	0.06	0.05	0.06			
100	0.04	0.05	0.06	0.07	0.06	0.06	0.05	0.05	0.14	0.14	0.14	0.14	0.14	0.13	0.13	0.13			
105	0.04	0.05	0.05	0.07	0.07	0.08	0.06	0.06	0.25	0.24	0.24	0.25	0.24	0.25	0.25	0.24			
110	0.03	0.06	0.05	0.08	0.08	0.09	0.06	0.06	0.40	0.35	0.36	0.38	0.38	0.38	0.37	0.37			
115	0.08	0.10	0.09	0.10	0.11	0.08	0.08	0.11	0.52	0.49	0.51	0.51	0.51	0.51	0.51	0.51			
120	0.25	0.21	0.25	0.24	0.22	0.17	0.20	0.19	0.62	0.62	0.59	0.56	0.63	0.62	0.65	0.60			
125	0.38	0.35	0.33	0.41	0.40	0.36	0.31	0.33	0.67	0.67	0.61	0.58	0.66	0.64	0.67	0.67			
130	0.54	0.51	0.51	0.57	0.55	0.51	0.43	0.51	0.76	0.68	0.65	0.62	0.69	0.67	0.70	0.70			
135	0.76	0.65	0.66	0.76	0.74	0.68	0.54	0.63	0.79	0.70	0.68	0.73	0.79	0.71	0.76	0.76			
140	0.99	0.90	0.87	1.03	1.00	1.00	0.78	0.93	0.87	0.79	0.73	0.81	0.83	0.84	0.82	0.83			
145	1.12	1.08	1.04	1.20	1.16	1.13	1.01	1.03	0.95	0.87	0.82	0.95	1.00	1.00	0.92	0.94			
150	1.23	1.25	1.25	1.28	1.27	1.28	1.17	1.13	1.08	1.01	0.98	1.13	1.14	1.14	1.14	1.08			
155	1.31	1.35	1.33	1.35	1.28	1.30	1.30	1.25	1.23	1.19	1.17	1.27	1.22	1.25	1.21	1.25			
160	1.37	1.36	1.38	1.38	1.35	1.35	1.33	1.32	1.31	1.28	1.26	1.33	1.38	1.30	1.31	1.29			
165	1.52	1.47	1.47	1.51	1.52	1.43	1.44	1.44	1.36	1.38	1.34	1.38	1.43	1.40	1.43	1.36			
170	1.55	1.54	1.58	1.63	1.65	1.57	1.54	1.56	1.46	1.47	1.46	1.52	1.52	1.55	1.58	1.47			
175	1.66	1.60	1.69	1.73	1.72	1.63	1.65	1.60	1.61	1.58	1.58	1.65	1.63	1.63	1.63	1.59			
180	1.69	1.61	1.69	1.74	1.70	1.63	1.65	1.60	1.65	1.69	1.61	1.70	1.71	1.71	1.63	1.65			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:24.5DEG  
 Operators:William  
 Test Date:2017-12-16

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.352  
 Humidity:65.7%  
 Test Distance:26.000m [K=1.4470]  
 Remarks:

Checker: DENNY

Assessor: JOE