
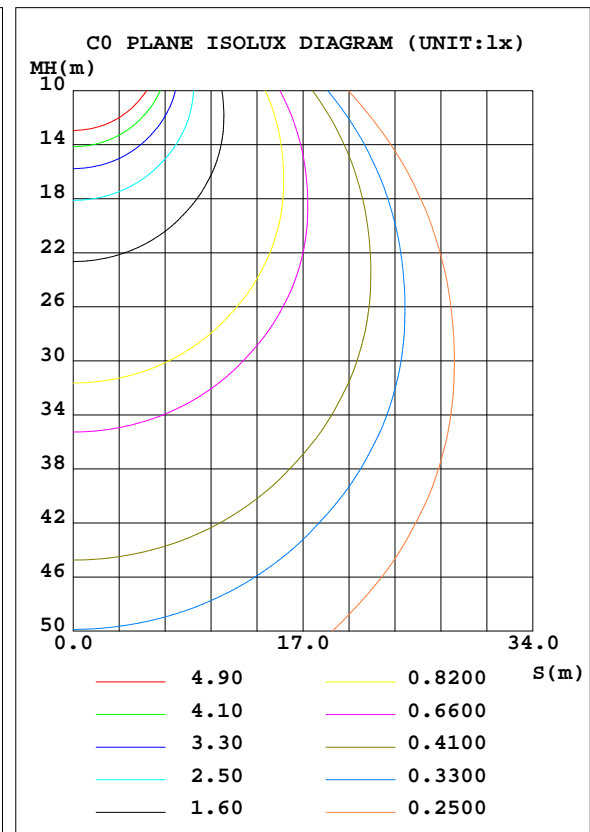


LUMINAIRE PHOTOMETRIC TEST REPORT

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-18W-SW-40	WEIGHT:
SPEC.:18W 4000K	DIM.: L:657mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 125.00 lm/W			
MODEL	BAWATY-18W-SW-40	Imax(cd)	820.8	S/MH(C0/180)	1.28
NOMINAL POWER(W)	18	LOR(%)	100.0	S/MH(C90/270)	1.29
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	2250.1	η UP, DN(C0-180)	0.1,49.8
NOMINAL FLUX(lm)	2250	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.1,50.0
LAMPS INSIDE	1	η up(%)	0.2	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	220	η down(%)	99.8	CIBSE SHR MAX	1.35

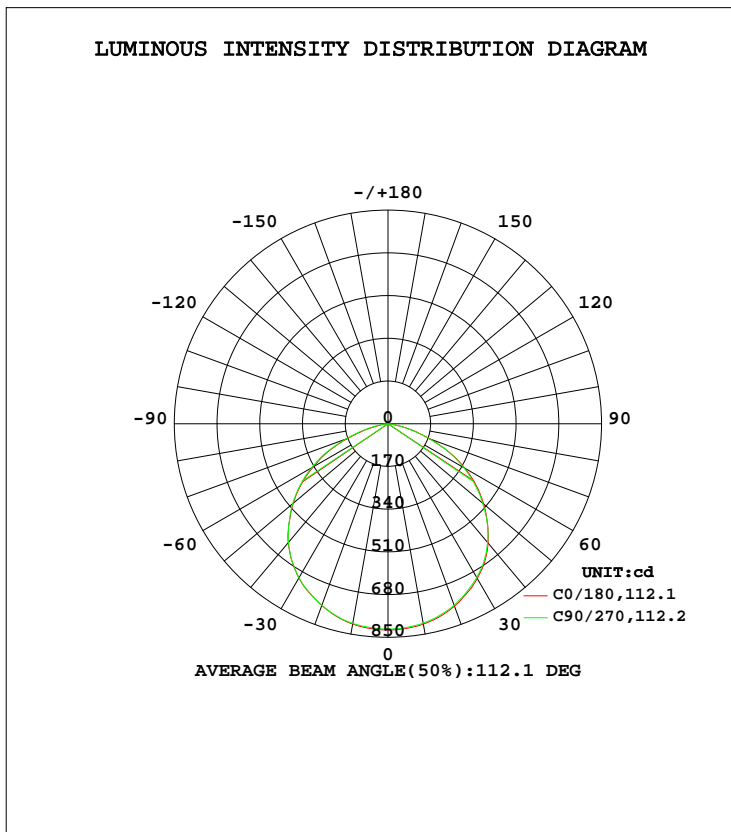

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	809.6	809.3	805.8	803.6	809.4	806.5	806.9	805.0	0- 10	77.53	77.53	3.45,3.45
20	772.8	772.1	768.8	766.0	769.7	769.2	769.0	768.5	10- 20	223.5	301.0	13.4,13.4
30	710.8	709.2	706.3	704.3	709.2	706.6	708.2	707.7	20- 30	342.0	643.0	28.6,28.6
40	619.7	616.7	616.9	611.7	617.3	613.7	616.4	617.2	30- 40	416.5	1060	47.1,47.1
50	497.5	494.9	492.2	488.0	492.3	492.9	495.0	496.4	40- 50	429.2	1489	66.2,66.2
60	352.9	354.0	348.3	343.7	344.2	349.2	351.2	357.5	50- 60	378.7	1867	83,83
70	179.9	180.1	175.0	173.0	172.0	176.1	180.4	186.8	60- 70	262.3	2130	94.7,94.7
80	33.46	34.93	34.03	33.22	31.57	36.28	35.16	40.54	70- 80	106.1	2236	99.4,99.4
90	0.1463	0.0776	0.0731	0.0891	0.0530	0.0529	0.2484	0.7058	80- 90	10.49	2246	99.8,99.8
100	0.0465	0.0642	0.0690	0.0597	0.1613	0.1609	0.1605	0.1426	90-100	0.1007	2246	99.8,99.8
110	0.0370	0.0544	0.0858	0.0686	0.4454	0.4097	0.4281	0.4111	100-110	0.1825	2247	99.8,99.8
120	0.2840	0.2840	0.2492	0.2302	0.7013	0.6648	0.7133	0.7313	110-120	0.3379	2247	99.9,99.9
130	0.6051	0.5698	0.6233	0.4805	0.8545	0.7361	0.7739	0.7844	120-130	0.5089	2247	99.9,99.9
140	1.117	0.9789	1.123	0.8729	0.9796	0.8194	0.9284	0.9266	130-140	0.6229	2248	99.9,99.9
150	1.389	1.407	1.426	1.318	1.211	1.104	1.284	1.283	140-150	0.7158	2249	99.9,99.9
160	1.541	1.549	1.516	1.496	1.475	1.421	1.551	1.479	150-160	0.6523	2249	100,100
170	1.745	1.780	1.854	1.728	1.638	1.639	1.709	1.782	160-170	0.4531	2250	100,100
180	1.905	1.905	1.909	1.853	1.851	1.816	1.926	1.835	170-180	0.1724	2250	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 1276.7 lm

%lum = 56.7%
%lamp = 56.7%

Conical surface Flux(120deg): 1867.4 lm

%lum = 83.0%
%lamp = 83.0%

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:24.5DEG
Operators:William
Test Date:2017-12-16


γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
Humidity:65.7%
Test Distance:26.000m [K=1.4470]
Remarks:

Checker: DENNY

Assessor: JOE

LUMINANCE LIMITATION CURVES

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-18W-SW-40	WEIGHT:
SPEC.:18W 4000K	DIM.: L:657mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

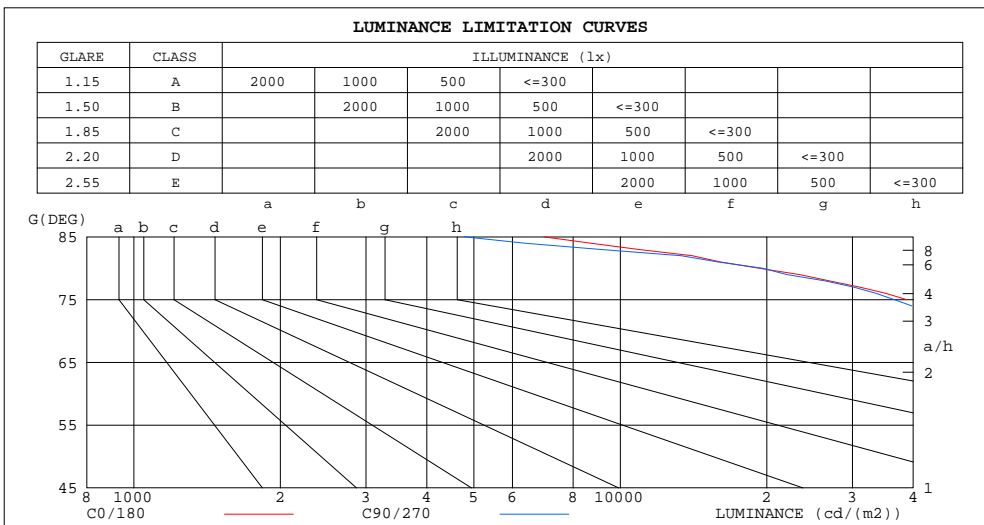

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	6963	4782
80	19268	19598
75	38733	36538
70	52611	51155
65	63819	63593
60	70579	69669
55	74719	73638
50	77399	76572
45	79167	79005

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:


Checker: DENNY

Assessor: JOE

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-18W-SW-40	WEIGHT:
SPEC.:18W 4000K	DIM.: L:657mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pw																
pfc																
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.05	1.01	.98	1.03	.99	.96	.99	.96	.93	.95	.92	.90	.91	.89	.88	.86
2.0	.92	.86	.80	.90	.84	.79	.87	.82	.78	.84	.79	.76	.81	.77	.74	.72
3.0	.81	.73	.67	.80	.72	.67	.77	.71	.65	.74	.69	.64	.71	.67	.63	.61
4.0	.72	.64	.57	.71	.63	.57	.68	.61	.56	.66	.60	.55	.64	.59	.54	.52
5.0	.64	.56	.49	.63	.55	.49	.61	.54	.48	.59	.53	.48	.57	.52	.47	.45
6.0	.58	.49	.43	.57	.49	.43	.55	.48	.42	.54	.47	.42	.52	.46	.42	.40
7.0	.53	.44	.38	.52	.44	.38	.50	.43	.37	.49	.42	.37	.47	.41	.37	.35
8.0	.48	.40	.34	.47	.39	.34	.46	.39	.33	.45	.38	.33	.44	.38	.33	.31
9.0	.44	.36	.30	.43	.36	.30	.42	.35	.30	.41	.35	.30	.40	.34	.30	.28
10.0	.41	.33	.28	.40	.33	.27	.39	.32	.27	.38	.32	.27	.37	.31	.27	.25

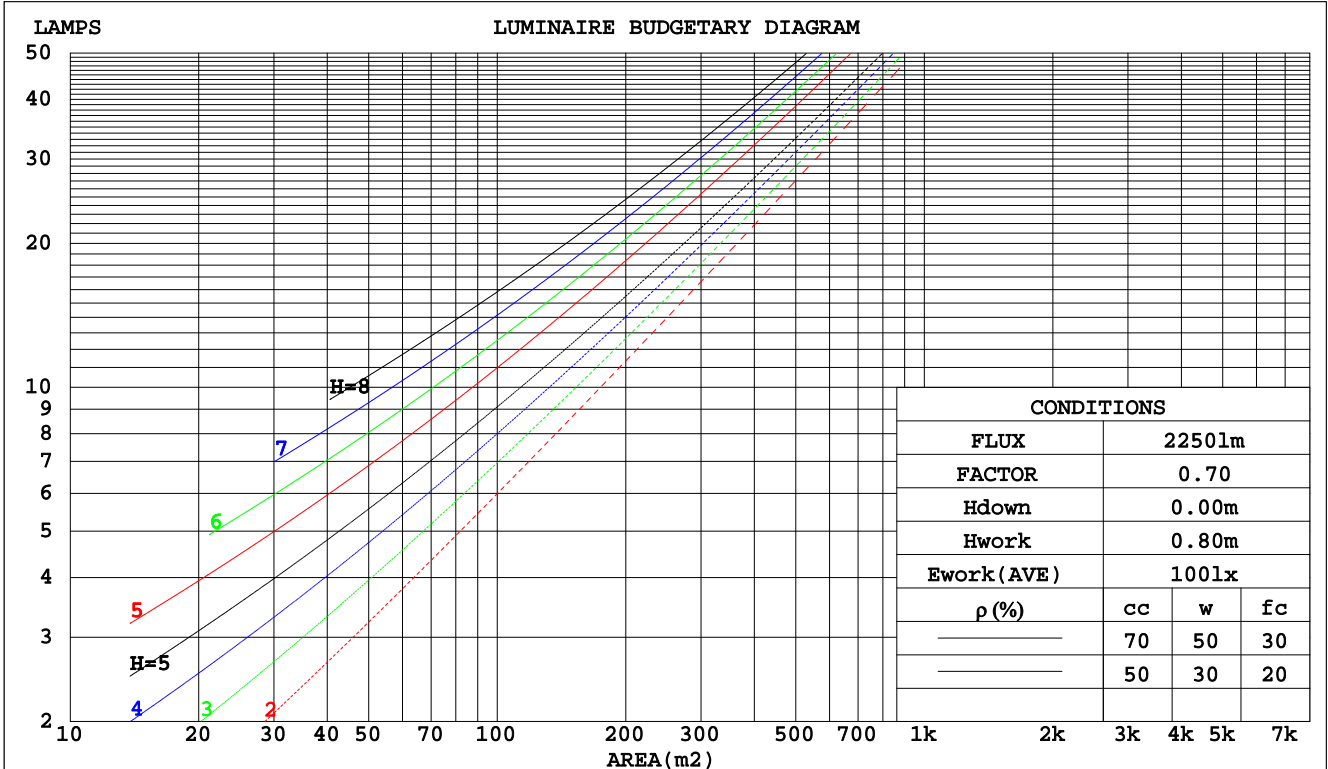

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

WEC AND CCEC

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-18W-SW-40	WEIGHT:
SPEC.:18W 4000K	DIM.: L:657mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.282	.161	.051	.275	.157	.050	.262	.150	.048	.250	.144	.046	.239	.138	.045	
2.0	.274	.150	.046	.267	.147	.045	.256	.142	.044	.245	.138	.043	.235	.133	.042	
3.0	.257	.137	.041	.252	.135	.041	.242	.131	.040	.232	.127	.039	.223	.124	.038	
4.0	.240	.125	.037	.235	.123	.036	.226	.120	.036	.218	.117	.035	.210	.114	.035	
5.0	.224	.114	.033	.219	.113	.033	.211	.110	.032	.204	.107	.032	.197	.105	.032	
6.0	.208	.105	.030	.205	.103	.030	.197	.101	.029	.191	.099	.029	.184	.097	.029	
7.0	.195	.096	.027	.191	.095	.027	.185	.093	.027	.179	.092	.027	.173	.090	.026	
8.0	.182	.089	.025	.179	.088	.025	.174	.087	.025	.168	.085	.025	.163	.084	.024	
9.0	.171	.083	.023	.169	.082	.023	.163	.081	.023	.159	.079	.023	.154	.078	.023	
10.0	.161	.077	.021	.159	.077	.021	.154	.076	.021	.150	.074	.021	.146	.073	.021	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.180	.158	.138	.154	.135	.119	.105	.093	.082	.061	.054	.048	.019	.017	.015	
2.0	.171	.133	.101	.147	.115	.088	.100	.079	.061	.058	.046	.036	.019	.015	.012	
3.0	.163	.116	.077	.140	.100	.067	.096	.069	.047	.056	.040	.028	.018	.013	.009	
4.0	.156	.102	.061	.134	.088	.053	.092	.061	.037	.053	.036	.022	.017	.012	.007	
5.0	.149	.092	.049	.128	.079	.043	.088	.055	.030	.051	.033	.018	.016	.011	.006	
6.0	.142	.083	.041	.122	.072	.036	.084	.050	.025	.049	.030	.015	.016	.010	.005	
7.0	.135	.076	.035	.116	.066	.031	.080	.046	.022	.047	.027	.013	.015	.009	.004	
8.0	.129	.071	.030	.111	.061	.027	.077	.043	.019	.045	.025	.011	.014	.008	.004	
9.0	.123	.066	.027	.106	.057	.023	.073	.040	.017	.043	.024	.010	.014	.008	.003	
10.0	.117	.061	.024	.101	.053	.021	.070	.037	.015	.041	.022	.009	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

UGR(Unified Glare Rating) Table

NAME: LED TRI-PROOF LIGHT		TYPE:BAWATY-18W-SW-40					WEIGHT:				
SPEC.:18W 4000K		DIM.: L:657mm					SERIAL No.:				
MFR.: DIMON TECHNOLOGY LTD		SUR.:					Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	Viewed crosswise					Viewed endwise					
x = 2H y = 2H	25.1	26.6	25.4	26.8	27.0	25.1	26.6	25.4	26.8	27.0	
3H	26.2	27.6	26.5	27.8	28.1	26.2	27.6	26.5	27.8	28.0	
4H	26.5	27.8	26.8	28.1	28.3	26.4	27.7	26.8	28.0	28.2	
6H	26.6	27.8	26.9	28.0	28.3	26.5	27.7	26.8	28.0	28.3	
8H	26.5	27.7	26.9	28.0	28.3	26.5	27.6	26.8	27.9	28.2	
12H	26.5	27.6	26.8	27.9	28.2	26.4	27.5	26.8	27.8	28.1	
4H 2H	25.6	26.9	25.9	27.2	27.4	25.6	26.9	25.9	27.2	27.4	
3H	26.9	28.0	27.2	28.3	28.6	26.8	28.0	27.2	28.3	28.6	
4H	27.2	28.3	27.6	28.6	28.9	27.2	28.2	27.5	28.5	28.8	
6H	27.3	28.2	27.7	28.6	29.0	27.3	28.2	27.7	28.5	28.9	
8H	27.3	28.2	27.7	28.5	28.9	27.2	28.1	27.7	28.4	28.8	
12H	27.3	28.0	27.7	28.4	28.8	27.2	28.0	27.6	28.4	28.8	
8H 4H	27.3	28.2	27.7	28.5	28.9	27.3	28.1	27.7	28.5	28.9	
6H	27.5	28.2	27.9	28.6	29.0	27.4	28.1	27.8	28.5	28.9	
8H	27.5	28.1	27.9	28.5	28.9	27.4	28.0	27.9	28.4	28.9	
12H	27.4	28.0	27.9	28.4	28.9	27.4	27.9	27.8	28.3	28.8	
12H 4H	27.3	28.1	27.7	28.4	28.9	27.2	28.0	27.7	28.4	28.8	
6H	27.4	28.1	27.9	28.5	28.9	27.4	28.0	27.8	28.4	28.9	
8H	27.4	28.0	27.9	28.4	28.9	27.4	27.9	27.9	28.3	28.8	
Variations with the observer position at spacings:											
S = 1.0H	+ 0.3 / - 0.3					+ 0.2 / - 0.3					
1.5H	+ 0.2 / - 0.4					+ 0.2 / - 0.4					
2.0H	+ 0.4 / - 0.4					+ 0.4 / - 0.4					

CIE Pub.117, 2250 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 2.8)

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

UTILIZATION FACTORS TABLE

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-18W-SW-40	WEIGHT:
SPEC.:18W 4000K	DIM.: L:657mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	59	47	40	58	47	40	57	46	40	34
0.80	69	58	50	68	57	50	66	56	50	43
1.00	78	67	60	76	66	60	74	68	59	52
1.25	85	75	68	83	74	68	81	73	67	60
1.50	90	80	74	88	80	73	85	78	72	65
2.00	97	89	83	95	87	82	91	85	80	73
2.50	100	93	87	98	92	87	95	89	85	77
3.00	104	97	92	101	96	91	98	93	89	81
4.00	107	102	98	105	100	97	101	97	94	85
5.00	110	105	102	107	103	100	103	100	97	88
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16


γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

ISOCANDELA DIAGRAM

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-18W-SW-40	WEIGHT:
SPEC.:18W 4000K	DIM.: L:657mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

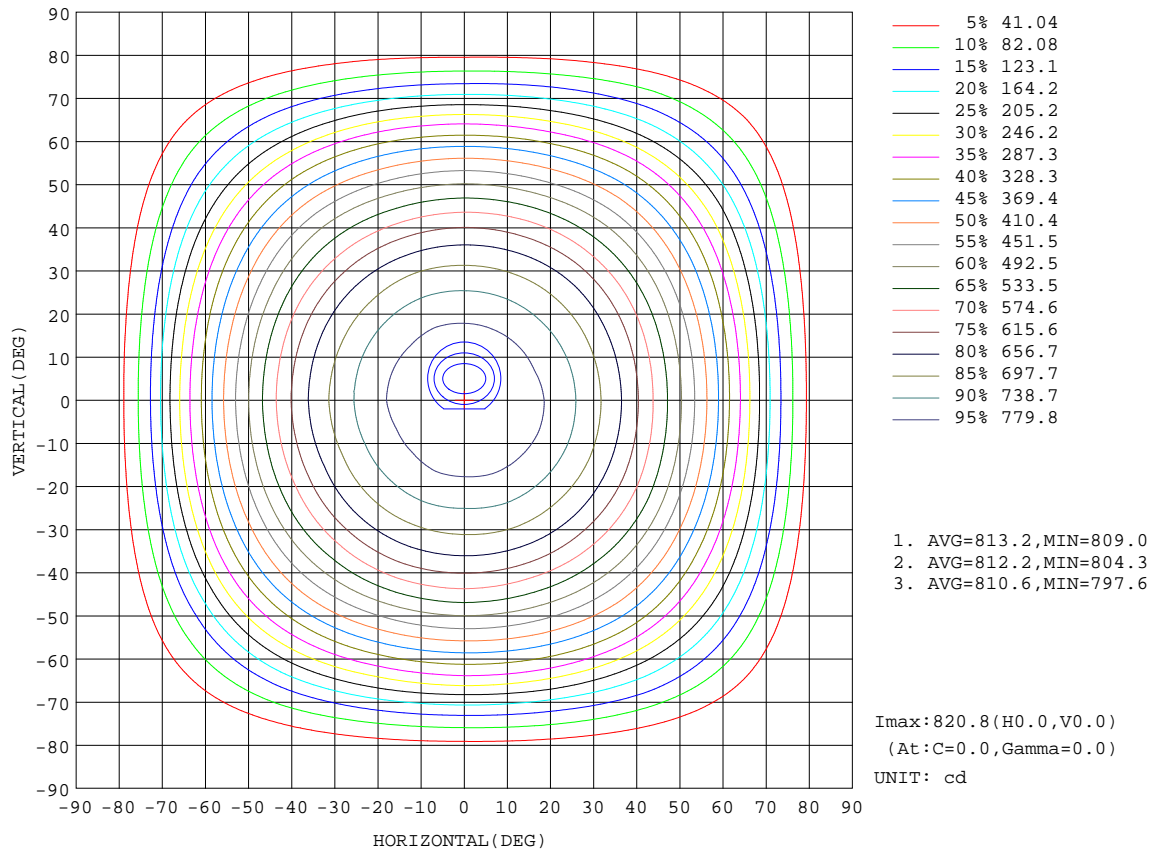

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16


γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

AAI Figure

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-18W-SW-40	WEIGHT:
SPEC.:18W 4000K	DIM.: L:657mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

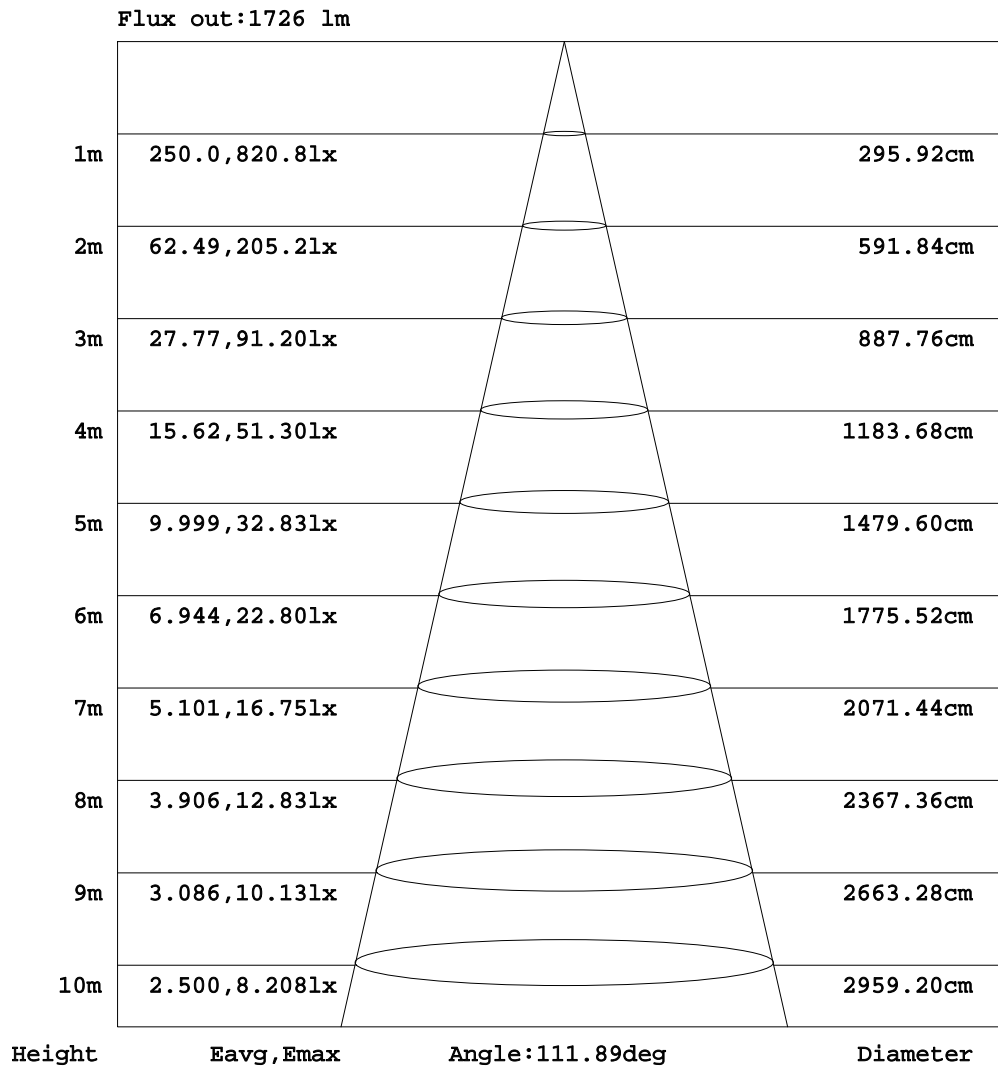

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16


γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

ISOLUX DIAGRAM

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-18W-SW-40	WEIGHT:
SPEC.:18W 4000K	DIM.: L:657mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

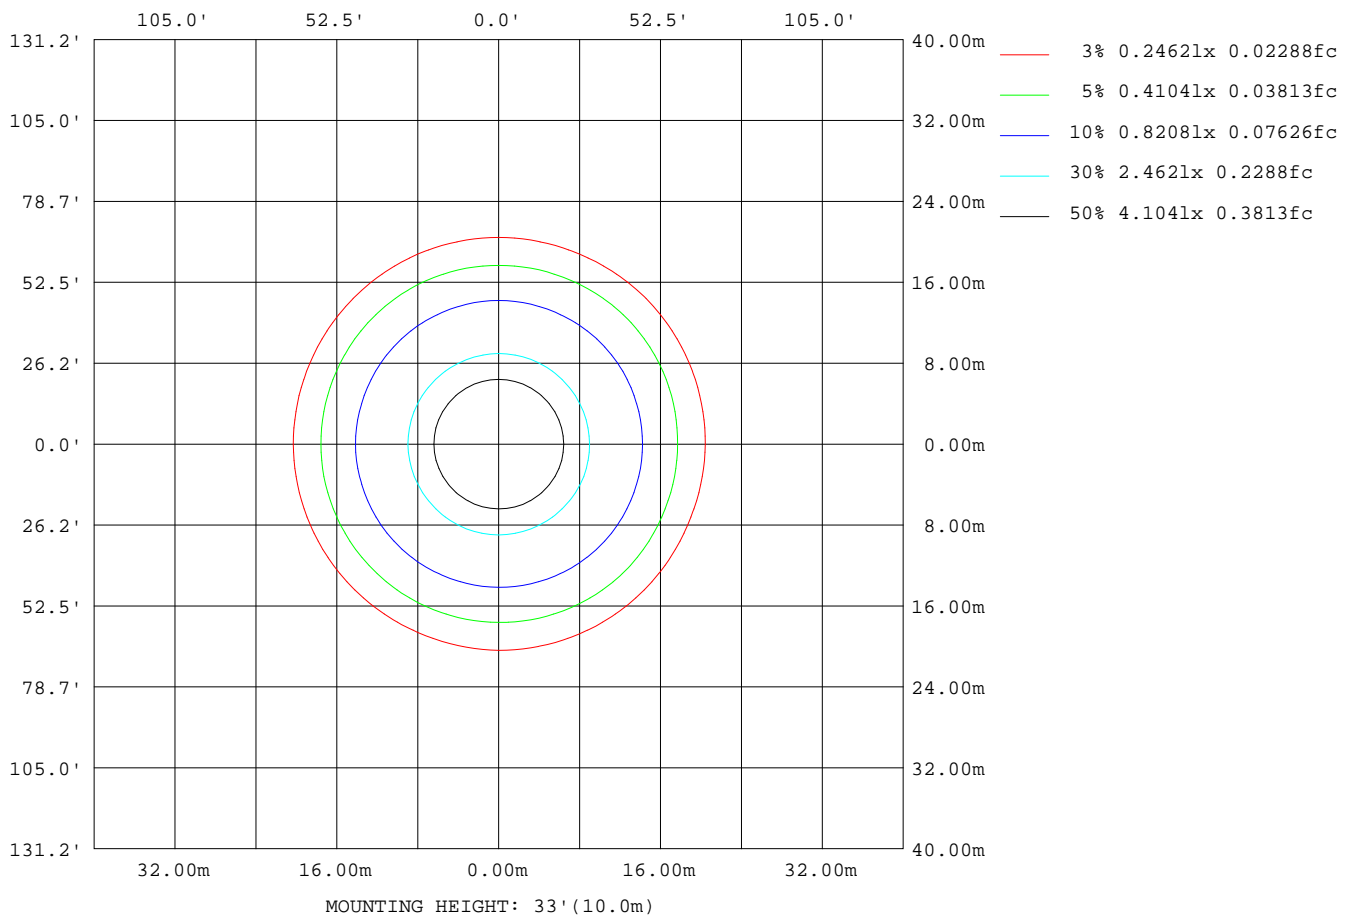


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

Planar Illuminance Curve

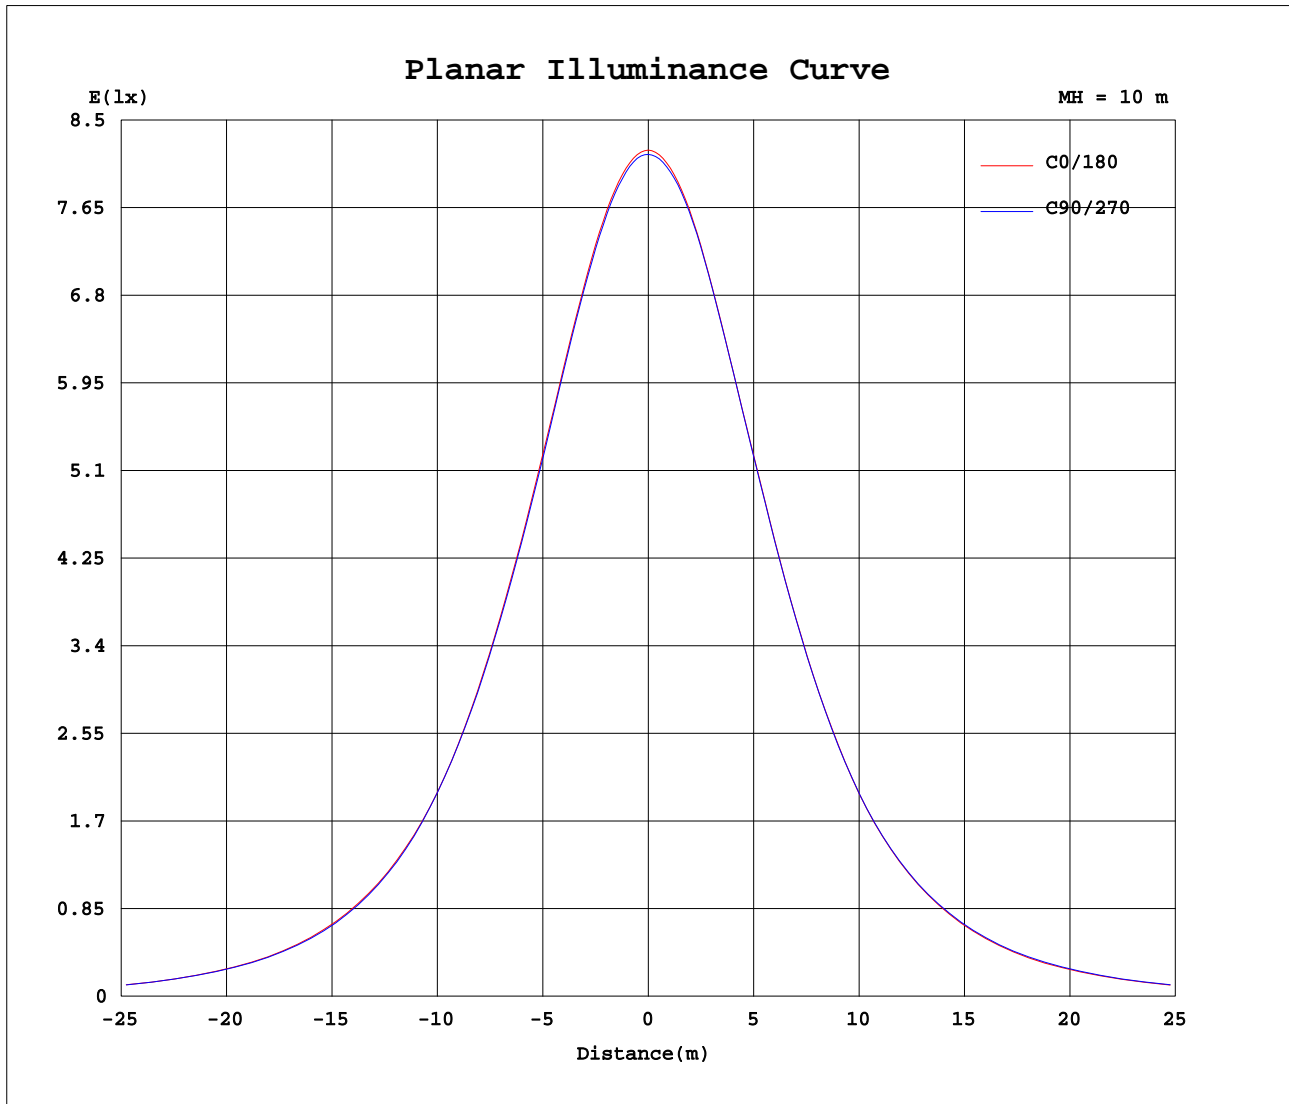

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 24.5DEG
 Operators: William
 Test Date: 2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity: 65.7%
 Test Distance: 26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-18W-SW-40	WEIGHT:
SPEC.:18W 4000K	DIM.: L:657mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	821	820	819	818	817	816	816	815	821	820	819	818	817	816	816	815			
5	818	817	817	816	814	814	813	812	818	816	815	815	814	813	813	812			
10	810	809	809	808	806	805	804	804	809	808	806	807	807	806	805	805			
15	795	795	794	793	790	791	789	789	793	792	791	793	792	791	791	790			
20	773	773	772	771	769	769	766	765	770	770	769	771	769	769	768	769			
25	744	745	743	743	739	740	739	739	742	742	742	743	741	741	741	742			
30	711	711	709	710	706	706	704	704	709	707	707	709	708	708	708	709			
35	671	670	668	668	666	665	663	661	667	666	665	665	666	666	667	668			
40	620	620	617	616	617	616	612	612	617	616	614	614	616	616	617	618			
45	560	563	558	556	559	556	551	552	556	556	554	554	557	558	557	559			
50	498	498	495	492	492	489	488	489	492	490	493	492	495	494	496	497			
55	429	427	428	425	422	419	420	418	422	420	424	424	427	426	430	429			
60	353	350	354	351	348	345	344	343	344	345	349	352	351	352	357	357			
65	270	265	267	268	269	260	261	262	264	263	265	269	271	270	274	273			
70	180	180	180	178	175	174	173	167	172	175	176	179	180	182	187	187			
75	100	101	100	98.5	94.6	94.2	93.1	88.9	90.5	97.4	100	99.7	101	103	108	106			
80	33.5	35.8	34.9	33.8	34.0	31.9	33.2	29.2	31.6	34.1	36.3	37.9	35.2	39.4	40.5	40.3			
85	6.07	5.47	5.18	4.66	4.17	4.07	3.84	4.01	4.31	5.36	5.62	6.89	5.99	6.20	6.58	7.41			
90	0.15	0.13	0.08	0.09	0.07	0.09	0.09	0.07	0.05	0.65	0.05	0.05	0.25	0.02	0.71	0.26			
95	0.05	0.05	0.07	0.07	0.06	0.06	0.06	0.06	0.07	0.21	0.06	0.07	0.05	0.06	0.05	0.07			
100	0.05	0.05	0.06	0.08	0.07	0.07	0.06	0.06	0.16	0.16	0.16	0.16	0.16	0.14	0.14	0.14			
105	0.04	0.06	0.06	0.08	0.08	0.08	0.06	0.07	0.29	0.27	0.27	0.29	0.27	0.29	0.29	0.27			
110	0.04	0.07	0.05	0.09	0.09	0.10	0.07	0.07	0.45	0.39	0.41	0.43	0.43	0.43	0.41	0.41			
115	0.09	0.11	0.11	0.12	0.12	0.09	0.09	0.12	0.59	0.55	0.57	0.57	0.57	0.57	0.57	0.57			
120	0.28	0.23	0.28	0.27	0.25	0.20	0.23	0.21	0.70	0.69	0.66	0.63	0.71	0.70	0.73	0.68			
125	0.43	0.39	0.37	0.46	0.45	0.41	0.35	0.37	0.75	0.75	0.69	0.65	0.74	0.72	0.75	0.75			
130	0.61	0.57	0.57	0.64	0.62	0.57	0.48	0.58	0.85	0.77	0.74	0.70	0.77	0.75	0.78	0.79			
135	0.85	0.73	0.75	0.86	0.84	0.77	0.61	0.71	0.89	0.78	0.77	0.82	0.89	0.80	0.85	0.86			
140	1.12	1.01	0.98	1.16	1.12	1.12	0.87	1.05	0.98	0.89	0.82	0.91	0.93	0.95	0.93	0.93			
145	1.26	1.21	1.18	1.35	1.30	1.27	1.14	1.16	1.07	0.98	0.93	1.07	1.12	1.12	1.03	1.05			
150	1.39	1.41	1.41	1.44	1.43	1.44	1.32	1.27	1.21	1.14	1.10	1.27	1.28	1.28	1.28	1.21			
155	1.48	1.51	1.49	1.52	1.44	1.46	1.46	1.41	1.39	1.34	1.32	1.43	1.37	1.41	1.36	1.41			
160	1.54	1.53	1.55	1.55	1.52	1.52	1.50	1.48	1.48	1.44	1.42	1.50	1.55	1.46	1.48	1.45			
165	1.71	1.66	1.65	1.69	1.71	1.61	1.62	1.62	1.53	1.55	1.51	1.55	1.61	1.57	1.60	1.53			
170	1.74	1.73	1.78	1.84	1.85	1.77	1.73	1.75	1.64	1.66	1.64	1.71	1.71	1.75	1.78	1.65			
175	1.87	1.80	1.91	1.95	1.94	1.84	1.85	1.80	1.82	1.78	1.78	1.86	1.84	1.84	1.84	1.79			
180	1.90	1.82	1.91	1.96	1.91	1.84	1.85	1.80	1.85	1.91	1.82	1.91	1.93	1.93	1.84	1.86			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE