
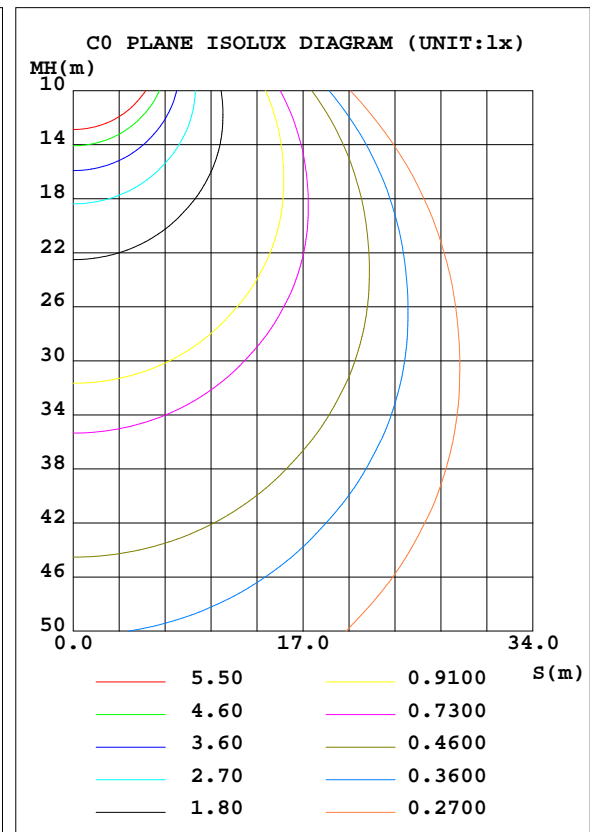


LUMINAIRE PHOTOMETRIC TEST REPORT

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-20W-SW-40	WEIGHT:
SPEC.:20W 4000K	DIM.: L:1267mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 125.00 lm/W			
MODEL	BAWATY-20W-SW-40	Imax(cd)	912.0	S/MH(C0/180)	1.28
NOMINAL POWER(W)	20	LOR(%)	100.0	S/MH(C90/270)	1.29
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	2500.1	η UP, DN(C0-180)	0.1,49.8
NOMINAL FLUX(lm)	2500	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.1,50.0
LAMPS INSIDE	1	η up(%)	0.2	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	220	η down(%)	99.8	CIBSE SHR MAX	1.35

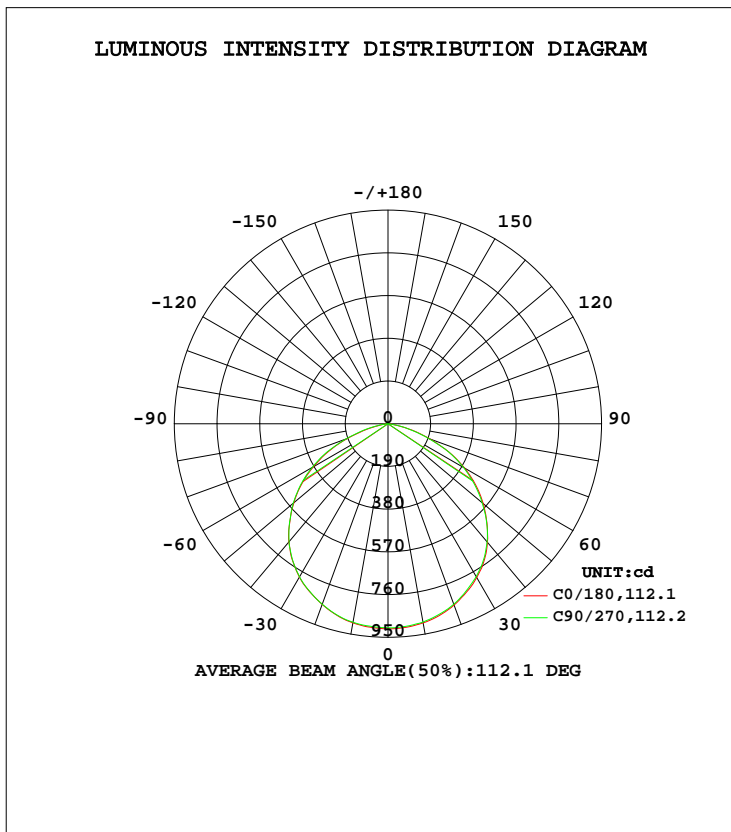

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:24.5DEG  
 Operators:William  
 Test Date:2017-12-16

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.352  
 Humidity:65.7%  
 Test Distance:26.000m [K=1.4470]  
 Remarks:

Checker: DENNY

Assessor: JOE

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	899.5	899.2	895.3	892.9	899.3	896.1	896.5	894.5	0- 10	86.14	86.14	3.45,3.45
20	858.7	857.9	854.2	851.1	855.2	854.7	854.4	853.8	10- 20	248.4	334.5	13.4,13.4
30	789.7	788.0	784.7	782.5	788.0	785.1	786.8	786.3	20- 30	380.0	714.5	28.6,28.6
40	688.6	685.2	685.4	679.7	685.9	681.8	684.9	685.7	30- 40	462.8	1177	47.1,47.1
50	552.8	549.9	546.9	542.2	547.1	547.7	550.0	551.5	40- 50	476.8	1654	66.2,66.2
60	392.1	393.3	387.0	381.8	382.5	388.0	390.2	397.2	50- 60	420.8	2075	83,83
70	199.9	200.1	194.4	192.2	191.1	195.6	200.4	207.6	60- 70	291.5	2366	94.7,94.7
80	37.18	38.81	37.81	36.91	35.08	40.32	39.07	45.04	70- 80	117.9	2484	99.4,99.4
90	0.1626	0.0862	0.0812	0.0990	0.0589	0.0588	0.2759	0.7843	80- 90	11.65	2496	99.8,99.8
100	0.0517	0.0713	0.0767	0.0663	0.1792	0.1788	0.1783	0.1585	90-100	0.1119	2496	99.8,99.8
110	0.0411	0.0604	0.0953	0.0762	0.4949	0.4552	0.4756	0.4568	100-110	0.2028	2496	99.8,99.8
120	0.3156	0.3155	0.2769	0.2557	0.7793	0.7386	0.7926	0.8126	110-120	0.3754	2497	99.9,99.9
130	0.6724	0.6331	0.6926	0.5339	0.9495	0.8179	0.8599	0.8716	120-130	0.5654	2497	99.9,99.9
140	1.242	1.088	1.248	0.9699	1.088	0.9104	1.032	1.030	130-140	0.6922	2498	99.9,99.9
150	1.543	1.563	1.584	1.465	1.346	1.227	1.427	1.425	140-150	0.7953	2499	99.9,99.9
160	1.713	1.721	1.684	1.663	1.639	1.579	1.724	1.643	150-160	0.7248	2499	100,100
170	1.938	1.978	2.060	1.920	1.820	1.821	1.899	1.980	160-170	0.5034	2500	100,100
180	2.117	2.117	2.121	2.059	2.057	2.018	2.140	2.039	170-180	0.1916	2500	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 1418.6 lm

%lum = 56.7%  
%lamp = 56.7%

Conical surface Flux(120deg): 2074.9 lm

%lum = 83.0%  
%lamp = 83.0%

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:24.5DEG  
Operators:William  
Test Date:2017-12-16


γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.352  
Humidity:65.7%  
Test Distance:26.000m [K=1.4470]  
Remarks:

Checker: DENNY

Assessor: JOE

LUMINANCE LIMITATION CURVES

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-20W-SW-40	WEIGHT:
SPEC.:20W 4000K	DIM.: L:1267mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

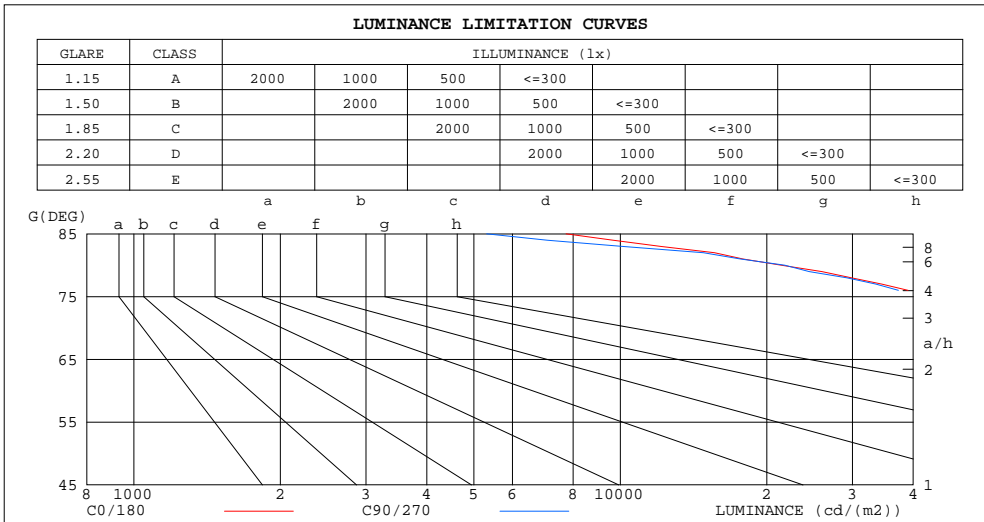

LUMINANCE cd/(m2)		
G( DEG)	C0/180	C90/270
85	7737	5313
80	21409	21775
75	43037	40598
70	58457	56839
65	70910	70659
60	78421	77410
55	83021	81821
50	85999	85080
45	87963	87783

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:24.5DEG  
 Operators:William  
 Test Date:2017-12-16

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.352  
 Humidity:65.7%  
 Test Distance:26.000m [K=1.4470]  
 Remarks:


Checker: DENNY

Assessor: JOE

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-20W-SW-40	WEIGHT:
SPEC.:20W 4000K	DIM.: L:1267mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pw																
pfc																
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.05	1.01	.98	1.03	.99	.96	.99	.96	.93	.95	.92	.90	.91	.89	.88	.86
2.0	.92	.86	.80	.90	.84	.79	.87	.82	.78	.84	.79	.76	.81	.77	.74	.72
3.0	.81	.73	.67	.80	.72	.67	.77	.71	.65	.74	.69	.64	.71	.67	.63	.61
4.0	.72	.64	.57	.71	.63	.57	.68	.61	.56	.66	.60	.55	.64	.59	.54	.52
5.0	.64	.56	.49	.63	.55	.49	.61	.54	.48	.59	.53	.48	.57	.52	.47	.45
6.0	.58	.49	.43	.57	.49	.43	.55	.48	.42	.54	.47	.42	.52	.46	.42	.40
7.0	.53	.44	.38	.52	.44	.38	.50	.43	.37	.49	.42	.37	.47	.41	.37	.35
8.0	.48	.40	.34	.47	.39	.34	.46	.39	.33	.45	.38	.33	.44	.38	.33	.31
9.0	.44	.36	.30	.43	.36	.30	.42	.35	.30	.41	.35	.30	.40	.34	.30	.28
10.0	.41	.33	.28	.40	.33	.27	.39	.32	.27	.38	.32	.27	.37	.31	.27	.25

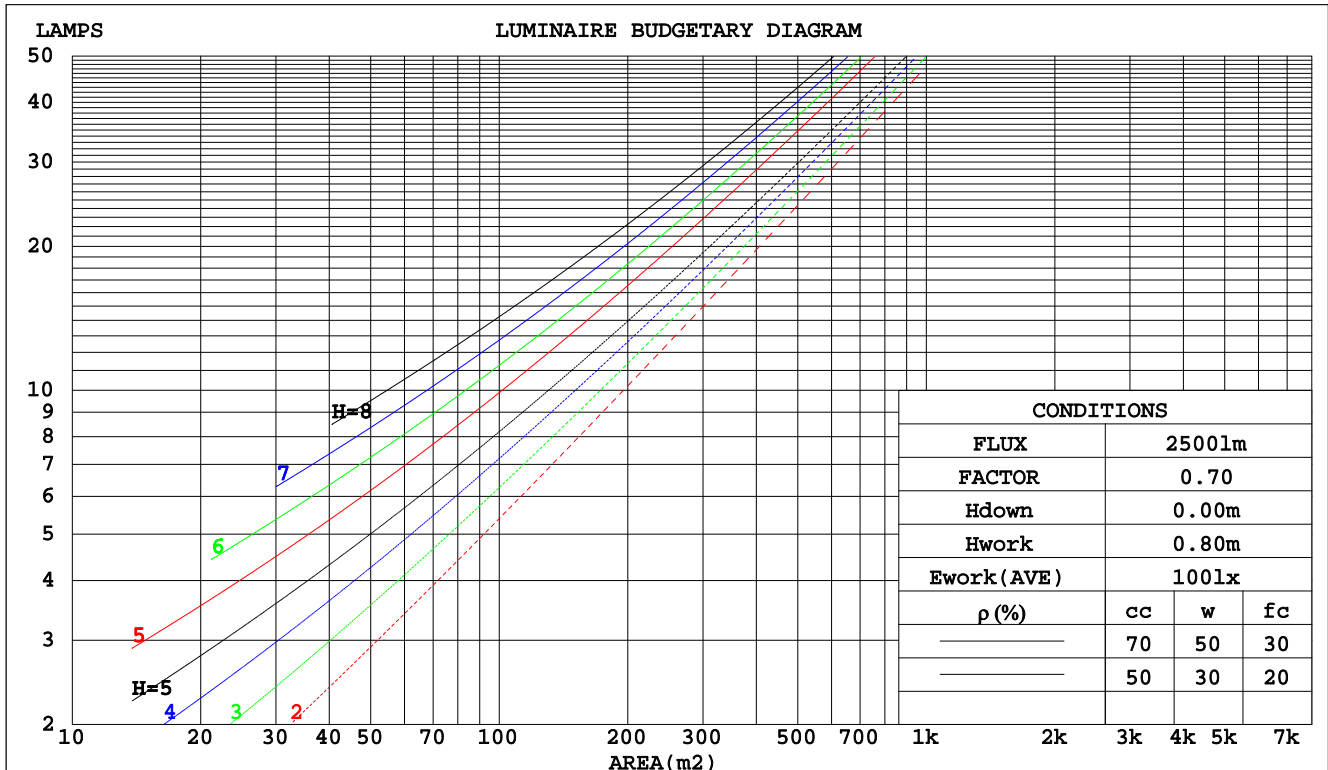

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:24.5DEG  
 Operators:William  
 Test Date:2017-12-16

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.352  
 Humidity:65.7%  
 Test Distance:26.000m [K=1.4470]  
 Remarks:

Checker: DENNY

Assessor: JOE

WEC AND CCEC

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-20W-SW-40	WEIGHT:
SPEC.:20W 4000K	DIM.: L:1267mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.282	.161	.051	.275	.157	.050	.262	.150	.048	.250	.144	.046	.239	.138	.045	
2.0	.274	.150	.046	.267	.147	.045	.256	.142	.044	.245	.138	.043	.235	.133	.042	
3.0	.257	.137	.041	.252	.135	.041	.242	.131	.040	.232	.127	.039	.223	.124	.038	
4.0	.240	.125	.037	.235	.123	.036	.226	.120	.036	.218	.117	.035	.210	.114	.035	
5.0	.224	.114	.033	.219	.113	.033	.211	.110	.032	.204	.107	.032	.197	.105	.032	
6.0	.208	.105	.030	.205	.103	.030	.197	.101	.029	.191	.099	.029	.184	.097	.029	
7.0	.195	.096	.027	.191	.095	.027	.185	.093	.027	.179	.092	.027	.173	.090	.026	
8.0	.182	.089	.025	.179	.088	.025	.174	.087	.025	.168	.085	.025	.163	.084	.024	
9.0	.171	.083	.023	.169	.082	.023	.163	.081	.023	.159	.079	.023	.154	.078	.023	
10.0	.161	.077	.021	.159	.077	.021	.154	.076	.021	.150	.074	.021	.146	.073	.021	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.180	.158	.138	.154	.135	.119	.105	.093	.082	.061	.054	.048	.019	.017	.015	
2.0	.171	.133	.101	.147	.115	.088	.100	.079	.061	.058	.046	.036	.019	.015	.012	
3.0	.163	.116	.077	.140	.100	.067	.096	.069	.047	.056	.040	.028	.018	.013	.009	
4.0	.156	.102	.061	.134	.088	.053	.092	.061	.037	.053	.036	.022	.017	.012	.007	
5.0	.149	.092	.049	.128	.079	.043	.088	.055	.030	.051	.033	.018	.016	.011	.006	
6.0	.142	.083	.041	.122	.072	.036	.084	.050	.025	.049	.030	.015	.016	.010	.005	
7.0	.135	.076	.035	.116	.066	.031	.080	.046	.022	.047	.027	.013	.015	.009	.004	
8.0	.129	.071	.030	.111	.061	.027	.077	.043	.019	.045	.025	.011	.014	.008	.004	
9.0	.123	.066	.027	.106	.057	.023	.073	.040	.017	.043	.024	.010	.014	.008	.003	
10.0	.117	.061	.024	.101	.053	.021	.070	.037	.015	.041	.022	.009	.013	.007	.003	

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:24.5DEG  
 Operators:William  
 Test Date:2017-12-16

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.352  
 Humidity:65.7%  
 Test Distance:26.000m [K=1.4470]  
 Remarks:

Checker: DENNY

Assessor: JOE

UGR(Unified Glare Rating) Table

NAME: LED TRI-PROOF LIGHT		TYPE:BAWATY-20W-SW-40					WEIGHT:				
SPEC.:20W 4000K		DIM.: L:1267mm					SERIAL No.:				
MFR.: DIMON TECHNOLOGY LTD		SUR.:					Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	Viewed crosswise					Viewed endwise					
x = 2H y = 2H	25.1	26.6	25.4	26.8	27.0	25.1	26.6	25.4	26.8	27.0	
3H	26.2	27.6	26.5	27.8	28.1	26.2	27.6	26.5	27.8	28.0	
4H	26.5	27.8	26.8	28.1	28.3	26.4	27.7	26.8	28.0	28.2	
6H	26.6	27.8	26.9	28.0	28.3	26.5	27.7	26.8	28.0	28.3	
8H	26.5	27.7	26.9	28.0	28.3	26.5	27.6	26.8	27.9	28.2	
12H	26.5	27.6	26.8	27.9	28.2	26.4	27.5	26.8	27.8	28.1	
4H 2H	25.6	26.9	25.9	27.2	27.4	25.6	26.9	25.9	27.2	27.4	
3H	26.9	28.0	27.2	28.3	28.6	26.8	28.0	27.2	28.3	28.6	
4H	27.2	28.3	27.6	28.6	28.9	27.2	28.2	27.5	28.5	28.8	
6H	27.3	28.2	27.7	28.6	29.0	27.3	28.2	27.7	28.5	28.9	
8H	27.3	28.2	27.7	28.5	28.9	27.2	28.1	27.7	28.4	28.8	
12H	27.3	28.0	27.7	28.4	28.8	27.2	28.0	27.6	28.4	28.8	
8H 4H	27.3	28.2	27.7	28.5	28.9	27.3	28.1	27.7	28.5	28.9	
6H	27.5	28.2	27.9	28.6	29.0	27.4	28.1	27.8	28.5	28.9	
8H	27.5	28.1	27.9	28.5	28.9	27.4	28.0	27.9	28.4	28.9	
12H	27.4	28.0	27.9	28.4	28.9	27.4	27.9	27.8	28.3	28.8	
12H 4H	27.3	28.1	27.7	28.4	28.9	27.2	28.0	27.7	28.4	28.8	
6H	27.4	28.1	27.9	28.5	28.9	27.4	28.0	27.8	28.4	28.9	
8H	27.4	28.0	27.9	28.4	28.9	27.4	27.9	27.9	28.3	28.8	
Variations with the observer position at spacings:											
S = 1.0H	+ 0.3 / - 0.3					+ 0.2 / - 0.3					
1.5H	+ 0.2 / - 0.4					+ 0.2 / - 0.4					
2.0H	+ 0.4 / - 0.4					+ 0.4 / - 0.4					

CIE Pub.117, 2500 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 3.2)

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:24.5DEG  
 Operators:William  
 Test Date:2017-12-16

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.352  
 Humidity:65.7%  
 Test Distance:26.000m [K=1.4470]  
 Remarks:

Checker: DENNY

Assessor: JOE

UTILIZATION FACTORS TABLE

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-20W-SW-40	WEIGHT:
SPEC.:20W 4000K	DIM.: L:1267mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	59	47	40	58	47	40	57	46	40	34
0.80	69	58	50	68	57	50	66	56	50	43
1.00	78	67	60	76	66	60	74	68	59	52
1.25	85	75	68	83	74	68	81	73	67	60
1.50	90	80	74	88	80	73	85	78	72	65
2.00	97	89	83	95	87	82	91	85	80	73
2.50	100	93	87	98	92	87	95	89	85	77
3.00	104	97	92	101	96	91	98	93	89	81
4.00	107	102	98	105	100	97	101	97	94	85
5.00	110	105	102	107	103	100	103	100	97	88
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:24.5DEG  
 Operators:William  
 Test Date:2017-12-16


$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.352  
 Humidity:65.7%  
 Test Distance:26.000m [K=1.4470]  
 Remarks:

Checker: DENNY

Assessor: JOE

**ISOCANDELA DIAGRAM**

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-20W-SW-40	WEIGHT:
SPEC.:20W 4000K	DIM.: L:1267mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

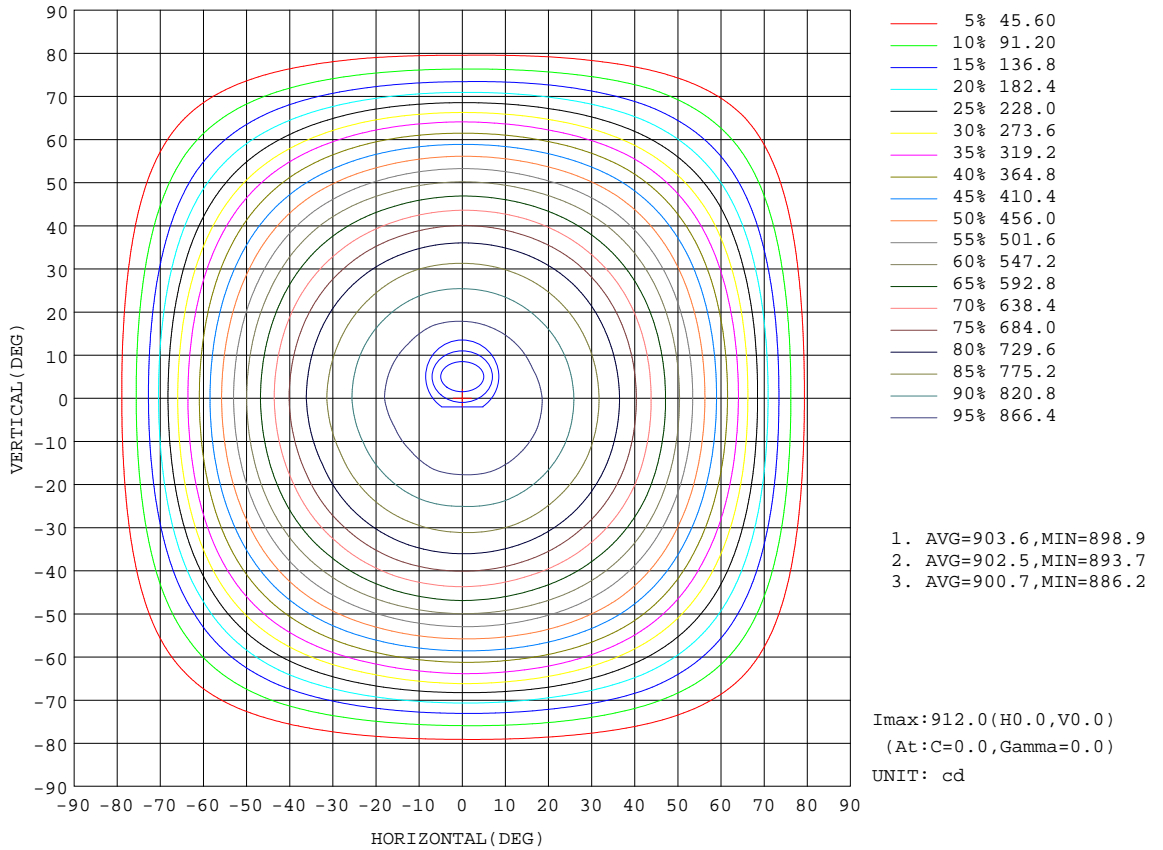

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:24.5DEG  
 Operators:William  
 Test Date:2017-12-16

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.352  
 Humidity:65.7%  
 Test Distance:26.000m [K=1.4470]  
 Remarks:


Checker: DENNY

Assessor: JOE



**AAI Figure**

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-20W-SW-40	WEIGHT:
SPEC.:20W 4000K	DIM.: L:1267mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

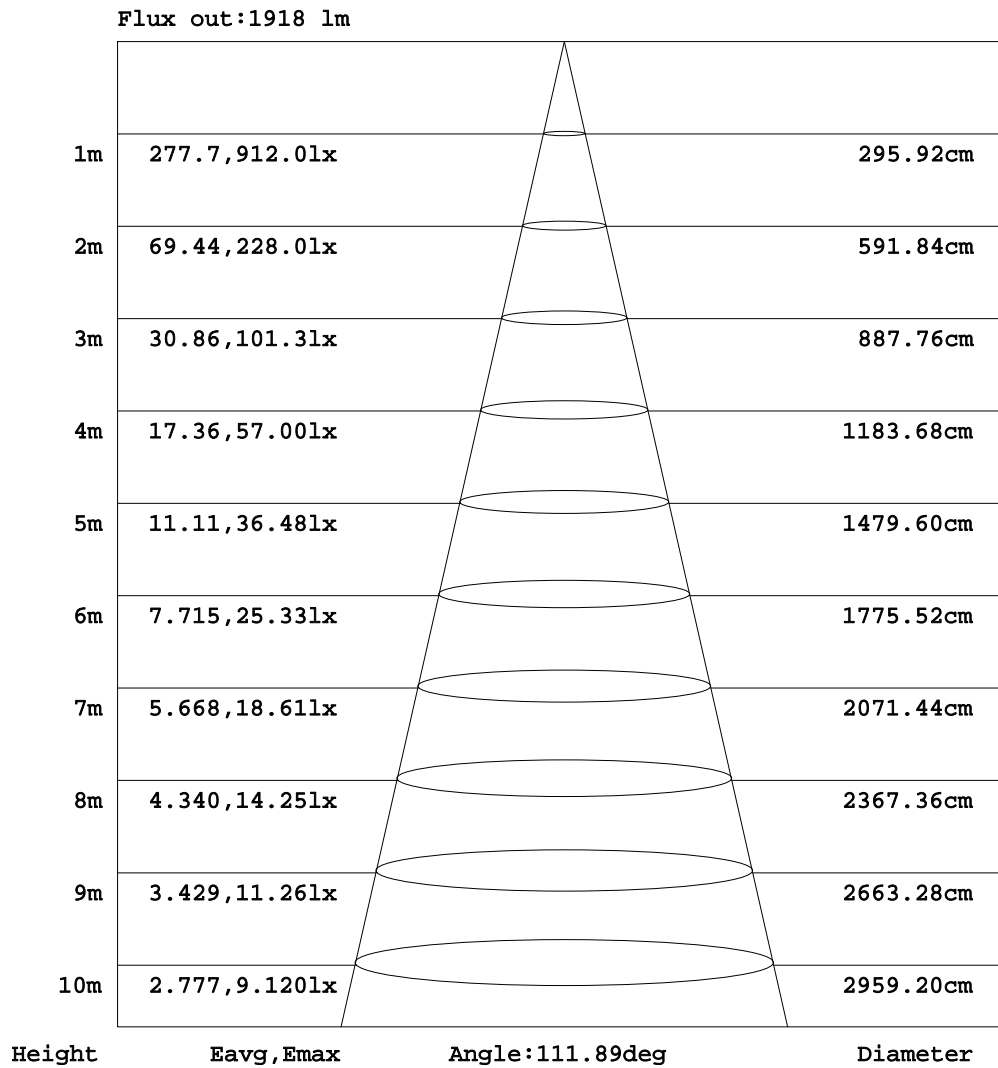

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:24.5DEG  
 Operators:William  
 Test Date:2017-12-16


γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.352  
 Humidity:65.7%  
 Test Distance:26.000m [K=1.4470]  
 Remarks:

Checker: DENNY

Assessor: JOE

**ISOLUX DIAGRAM**

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-20W-SW-40	WEIGHT:
SPEC.:20W 4000K	DIM.: L:1267mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

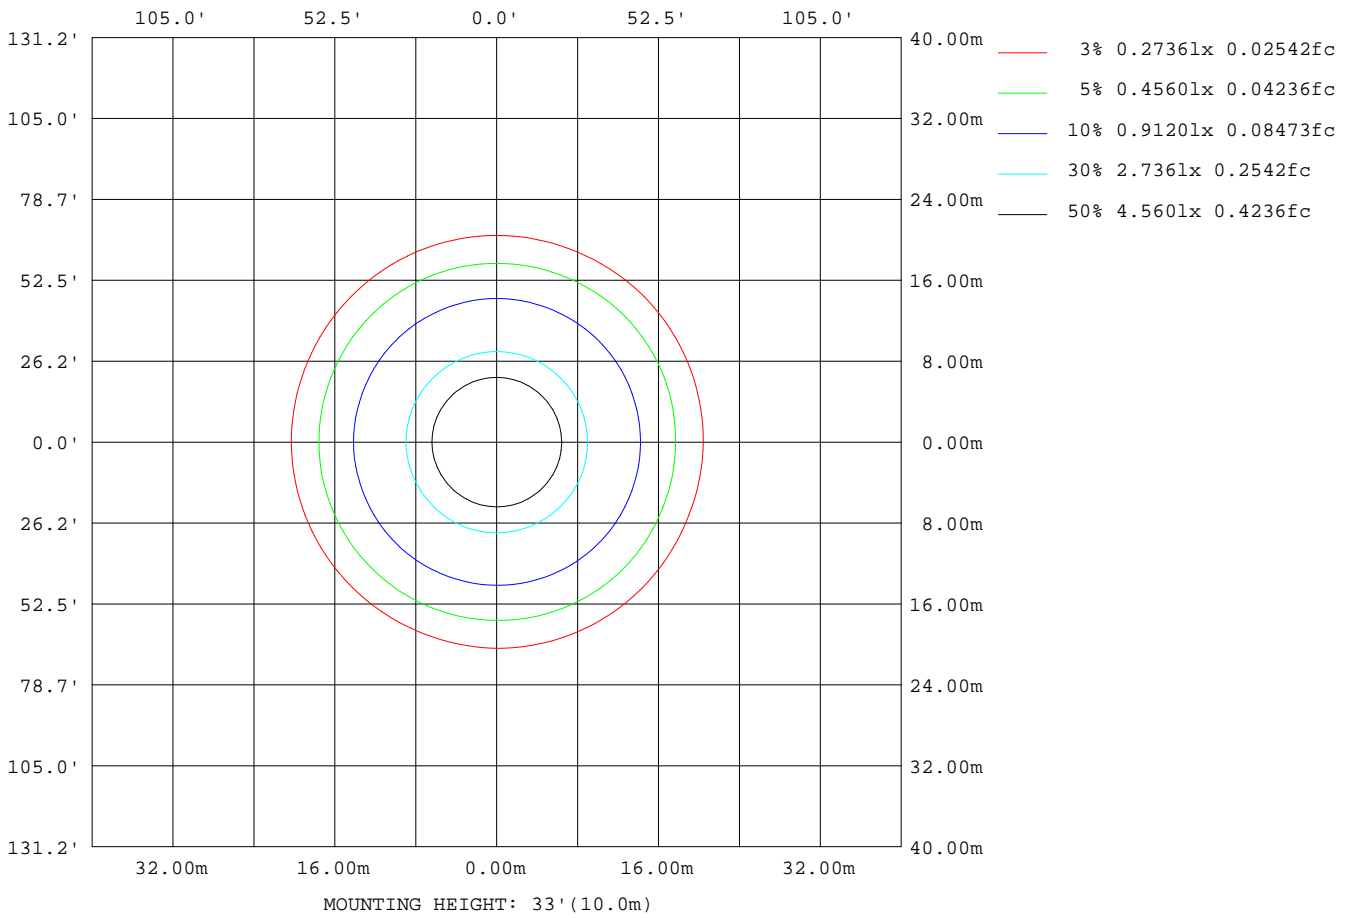


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:24.5DEG  
 Operators:William  
 Test Date:2017-12-16

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.352  
 Humidity:65.7%  
 Test Distance:26.000m [K=1.4470]  
 Remarks:

Checker: DENNY

Assessor: JOE

Planar Illuminance Curve

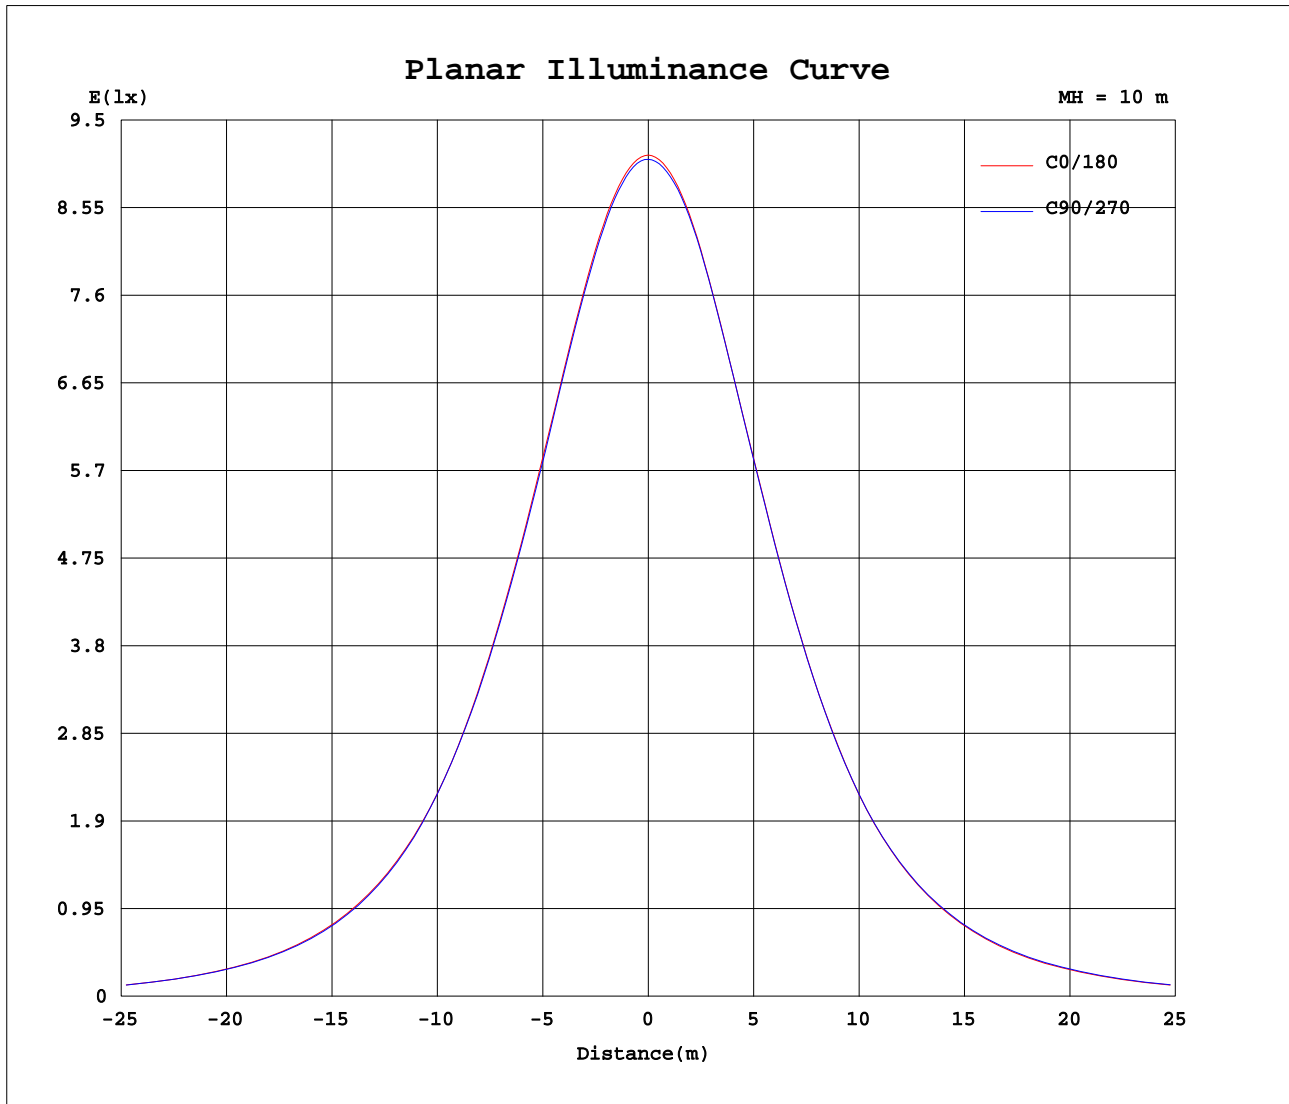

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 24.5DEG  
 Operators: William  
 Test Date: 2017-12-16

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.0.352  
 Humidity: 65.7%  
 Test Distance: 26.000m [K=1.4470]  
 Remarks:

Checker: DENNY

Assessor: JOE

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-20W-SW-40	WEIGHT:
SPEC.:20W 4000K	DIM.: L:1267mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C( DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	912	911	910	909	907	907	906	906	912	911	910	909	907	907	906	906			
5	909	907	907	907	905	904	903	903	909	907	906	906	904	904	903	903			
10	900	899	899	898	895	895	893	894	899	898	896	897	897	895	894	894			
15	883	883	882	881	878	879	876	877	881	881	879	881	880	879	878	878			
20	859	859	858	857	854	855	851	850	855	855	855	857	854	854	854	855			
25	827	827	826	825	821	823	821	821	825	825	824	825	823	823	823	824			
30	790	790	788	789	785	784	783	782	788	786	785	788	787	787	786	788			
35	745	744	743	742	740	739	737	735	741	741	739	739	740	740	742	743			
40	689	689	685	685	685	685	680	680	686	685	682	682	685	684	686	687			
45	622	625	620	618	621	618	612	613	618	617	615	615	619	620	619	621			
50	553	553	550	547	547	543	542	543	547	544	548	547	550	548	552	552			
55	476	475	476	473	469	466	467	464	469	467	471	472	475	473	478	477			
60	392	389	393	390	387	383	382	381	382	383	388	391	390	391	397	397			
65	300	295	297	298	299	289	290	292	294	292	294	299	301	300	304	304			
70	200	200	200	198	194	193	192	185	191	195	196	199	200	202	208	208			
75	111	112	111	109	105	105	103	98.8	101	108	112	111	113	115	120	118			
80	37.2	39.8	38.8	37.6	37.8	35.5	36.9	32.5	35.1	37.9	40.3	42.2	39.1	43.8	45.0	44.7			
85	6.74	6.08	5.75	5.18	4.63	4.52	4.26	4.46	4.79	5.96	6.24	7.66	6.65	6.89	7.31	8.24			
90	0.16	0.14	0.09	0.10	0.08	0.10	0.10	0.08	0.06	0.73	0.06	0.06	0.28	0.02	0.78	0.29			
95	0.06	0.06	0.08	0.08	0.07	0.07	0.06	0.06	0.08	0.23	0.07	0.08	0.06	0.07	0.06	0.08			
100	0.05	0.06	0.07	0.09	0.08	0.08	0.07	0.07	0.18	0.18	0.18	0.18	0.18	0.16	0.16	0.16			
105	0.05	0.07	0.07	0.09	0.09	0.09	0.07	0.07	0.32	0.30	0.30	0.32	0.30	0.32	0.32	0.30			
110	0.04	0.08	0.06	0.10	0.10	0.11	0.08	0.08	0.49	0.44	0.46	0.48	0.48	0.48	0.46	0.46			
115	0.10	0.12	0.12	0.13	0.14	0.10	0.10	0.14	0.65	0.61	0.63	0.63	0.64	0.63	0.63	0.64			
120	0.32	0.26	0.32	0.30	0.28	0.22	0.26	0.24	0.78	0.77	0.74	0.70	0.79	0.77	0.81	0.75			
125	0.47	0.44	0.41	0.51	0.50	0.45	0.39	0.42	0.83	0.83	0.76	0.72	0.83	0.80	0.84	0.83			
130	0.67	0.63	0.63	0.71	0.69	0.63	0.53	0.64	0.95	0.85	0.82	0.77	0.86	0.83	0.87	0.87			
135	0.95	0.81	0.83	0.95	0.93	0.85	0.67	0.79	0.99	0.87	0.85	0.91	0.99	0.89	0.94	0.95			
140	1.24	1.13	1.09	1.29	1.25	1.25	0.97	1.17	1.09	0.99	0.91	1.01	1.03	1.05	1.03	1.03			
145	1.40	1.35	1.31	1.51	1.45	1.41	1.27	1.29	1.19	1.09	1.03	1.19	1.25	1.25	1.15	1.17			
150	1.54	1.56	1.56	1.60	1.58	1.60	1.46	1.41	1.35	1.27	1.23	1.41	1.43	1.43	1.43	1.35			
155	1.64	1.68	1.66	1.68	1.60	1.62	1.63	1.57	1.54	1.48	1.46	1.59	1.53	1.57	1.51	1.57			
160	1.71	1.70	1.72	1.72	1.68	1.68	1.66	1.65	1.64	1.60	1.58	1.66	1.72	1.63	1.64	1.61			
165	1.90	1.84	1.84	1.88	1.90	1.78	1.80	1.81	1.70	1.72	1.68	1.72	1.78	1.74	1.78	1.70			
170	1.94	1.92	1.98	2.04	2.06	1.96	1.92	1.94	1.82	1.84	1.82	1.90	1.90	1.94	1.98	1.84			
175	2.08	2.00	2.12	2.16	2.15	2.04	2.06	2.00	2.02	1.98	1.98	2.06	2.04	2.04	2.04	1.98			
180	2.12	2.02	2.12	2.18	2.12	2.04	2.06	2.00	2.06	2.12	2.02	2.12	2.14	2.14	2.04	2.06			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:24.5DEG  
 Operators:William  
 Test Date:2017-12-16

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.352  
 Humidity:65.7%  
 Test Distance:26.000m [K=1.4470]  
 Remarks:

Checker: DENNY

Assessor: JOE