
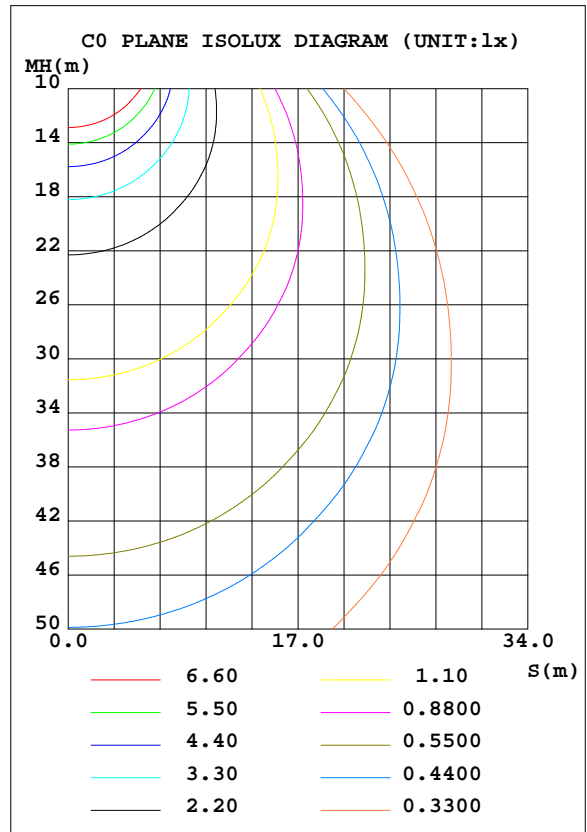


LUMINAIRE PHOTOMETRIC TEST REPORT

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-24W-SW-40	WEIGHT:
SPEC.:24W 4000K	DIM.: L:1267mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 125.00 lm/W			
MODEL	BAWATY-24W-SW-40	Imax(cd)	1094	S/MH(C0/180)	1.28
NOMINAL POWER(W)	24	LOR(%)	100.0	S/MH(C90/270)	1.29
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	3000.1	η UP, DN(C0-180)	0.1,49.8
NOMINAL FLUX(lm)	3000	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.1,50.0
LAMPS INSIDE	1	η up(%)	0.2	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	220	η down(%)	99.8	CIBSE SHR MAX	1.35

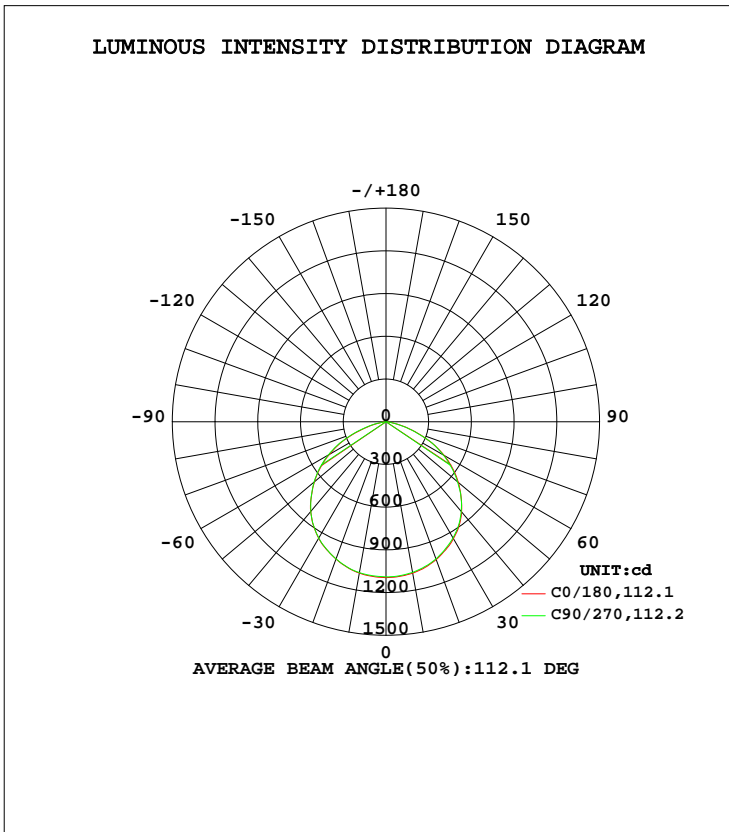

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1079	1079	1074	1071	1079	1075	1076	1073	0- 10	103.4	103.4	3.45,3.45
20	1030	1030	1025	1021	1026	1026	1025	1025	10- 20	298.0	401.4	13.4,13.4
30	947.7	945.6	941.7	939.1	945.6	942.1	944.2	943.5	20- 30	456.0	857.4	28.6,28.6
40	826.3	822.3	822.5	815.7	823.0	818.2	821.9	822.9	30- 40	555.3	1413	47.1,47.1
50	663.3	659.9	656.3	650.6	656.5	657.2	660.0	661.8	40- 50	572.2	1985	66.2,66.2
60	470.5	471.9	464.5	458.2	459.0	465.6	468.3	476.6	50- 60	505.0	2490	83,83
70	239.9	240.1	233.3	230.6	229.3	234.7	240.5	249.1	60- 70	349.8	2840	94.7,94.7
80	44.61	46.58	45.37	44.29	42.09	48.38	46.88	54.05	70- 80	141.4	2981	99.4,99.4
90	0.1951	0.1035	0.0974	0.1188	0.0707	0.0705	0.3311	0.9411	80- 90	13.98	2995	99.8,99.8
100	0.0620	0.0855	0.0921	0.0796	0.2150	0.2146	0.2140	0.1902	90-100	0.1343	2995	99.8,99.8
110	0.0493	0.0725	0.1144	0.0915	0.5939	0.5463	0.5708	0.5481	100-110	0.2434	2995	99.8,99.8
120	0.3787	0.3786	0.3322	0.3069	0.9351	0.8864	0.9511	0.9751	110-120	0.4505	2996	99.9,99.9
130	0.8068	0.7597	0.8311	0.6406	1.139	0.9814	1.032	1.046	120-130	0.6785	2997	99.9,99.9
140	1.490	1.305	1.498	1.164	1.306	1.092	1.238	1.235	130-140	0.8306	2997	99.9,99.9
150	1.851	1.875	1.901	1.758	1.615	1.472	1.712	1.710	140-150	0.9544	2998	99.9,99.9
160	2.055	2.065	2.021	1.995	1.967	1.895	2.069	1.972	150-160	0.8698	2999	100,100
170	2.326	2.374	2.472	2.304	2.184	2.186	2.279	2.376	160-170	0.6041	3000	100,100
180	2.540	2.540	2.545	2.471	2.469	2.422	2.568	2.447	170-180	0.2299	3000	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 1702.3 lm

%lum = 56.7%
%lamp = 56.7%

Conical surface Flux(120deg): 2489.9 lm

%lum = 83.0%
%lamp = 83.0%

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:24.5DEG
Operators:William
Test Date:2017-12-16


γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
Humidity:65.7%
Test Distance:26.000m [K=1.4470]
Remarks:

Checker: DENNY

Assessor: JOE

LUMINANCE LIMITATION CURVES

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-24W-SW-40	WEIGHT:
SPEC.:24W 4000K	DIM.: L:1267mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

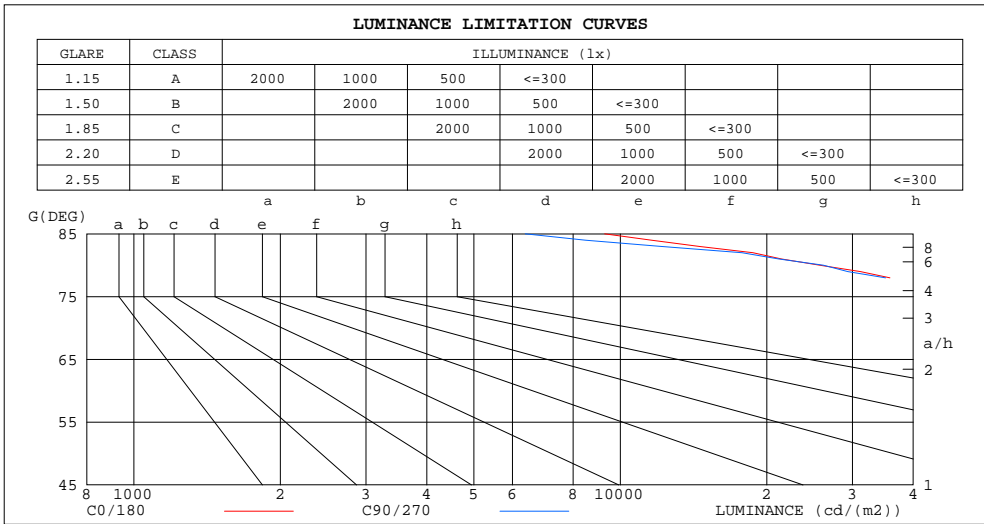

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	9284	6375
80	25691	26130
75	51644	48717
70	70148	68207
65	85093	84791
60	94105	92892
55	99626	98185
50	103199	102096
45	105556	105340

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:


Checker: DENNY

Assessor: JOE

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-24W-SW-40	WEIGHT:
SPEC.:24W 4000K	DIM.: L:1267mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pw																0
pfc																0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.05	1.01	.98	1.03	.99	.96	.99	.96	.93	.95	.92	.90	.91	.89	.88	.86
2.0	.92	.86	.80	.90	.84	.79	.87	.82	.78	.84	.79	.76	.81	.77	.74	.72
3.0	.81	.73	.67	.80	.72	.67	.77	.71	.65	.74	.69	.64	.71	.67	.63	.61
4.0	.72	.64	.57	.71	.63	.57	.68	.61	.56	.66	.60	.55	.64	.59	.54	.52
5.0	.64	.56	.49	.63	.55	.49	.61	.54	.48	.59	.53	.48	.57	.52	.47	.45
6.0	.58	.49	.43	.57	.49	.43	.55	.48	.42	.54	.47	.42	.52	.46	.42	.40
7.0	.53	.44	.38	.52	.44	.38	.50	.43	.37	.49	.42	.37	.47	.41	.37	.35
8.0	.48	.40	.34	.47	.39	.34	.46	.39	.33	.45	.38	.33	.44	.38	.33	.31
9.0	.44	.36	.30	.43	.36	.30	.42	.35	.30	.41	.35	.30	.40	.34	.30	.28
10.0	.41	.33	.28	.40	.33	.27	.39	.32	.27	.38	.32	.27	.37	.31	.27	.25

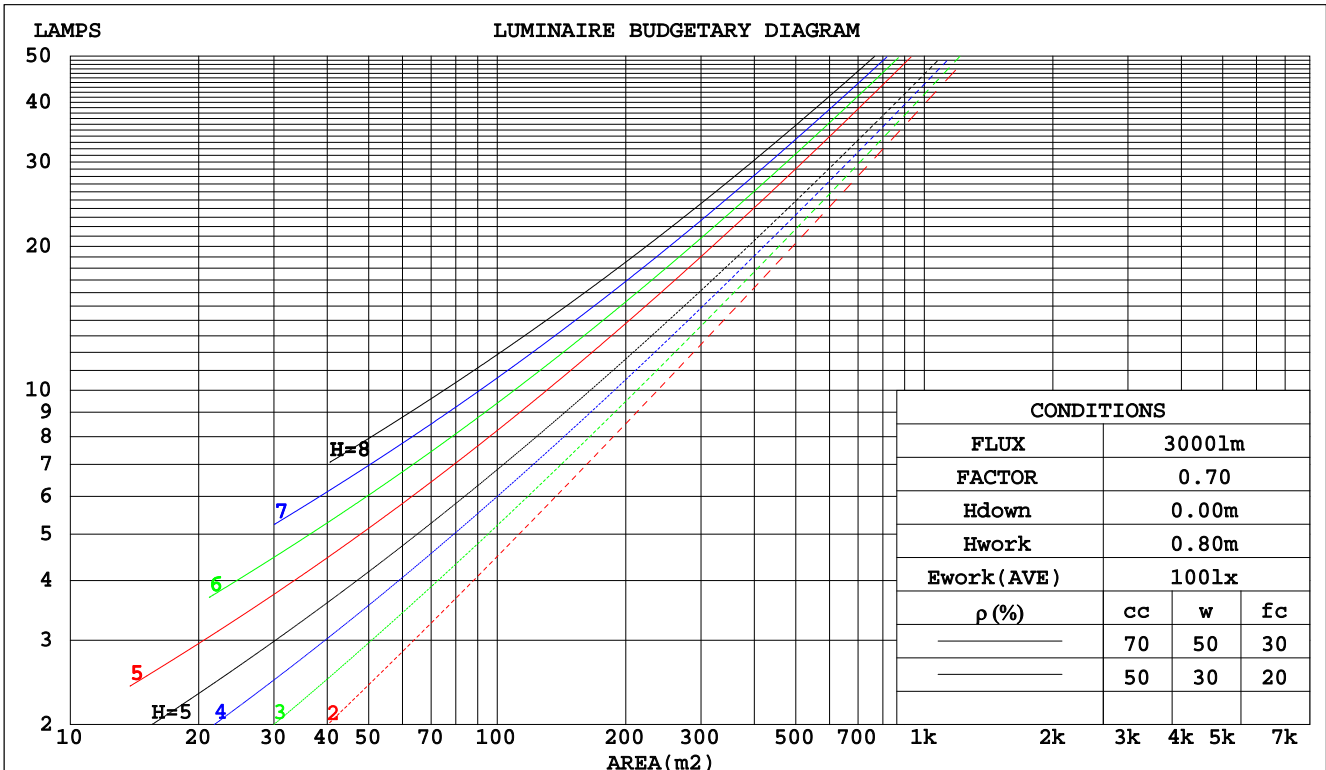

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

WEC AND CCEC

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-24W-SW-40	WEIGHT:
SPEC.:24W 4000K	DIM.: L:1267mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.282	.161	.051	.275	.157	.050	.262	.150	.048	.250	.144	.046	.239	.138	.045	
2.0	.274	.150	.046	.267	.147	.045	.256	.142	.044	.245	.138	.043	.235	.133	.042	
3.0	.257	.137	.041	.252	.135	.041	.242	.131	.040	.232	.127	.039	.223	.124	.038	
4.0	.240	.125	.037	.235	.123	.036	.226	.120	.036	.218	.117	.035	.210	.114	.035	
5.0	.224	.114	.033	.219	.113	.033	.211	.110	.032	.204	.107	.032	.197	.105	.032	
6.0	.208	.105	.030	.205	.103	.030	.197	.101	.029	.191	.099	.029	.184	.097	.029	
7.0	.195	.096	.027	.191	.095	.027	.185	.093	.027	.179	.092	.027	.173	.090	.026	
8.0	.182	.089	.025	.179	.088	.025	.174	.087	.025	.168	.085	.025	.163	.084	.024	
9.0	.171	.083	.023	.169	.082	.023	.163	.081	.023	.159	.079	.023	.154	.078	.023	
10.0	.161	.077	.021	.159	.077	.021	.154	.076	.021	.150	.074	.021	.146	.073	.021	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.180	.158	.138	.154	.135	.119	.105	.093	.082	.061	.054	.048	.019	.017	.015	
2.0	.171	.133	.101	.147	.115	.088	.100	.079	.061	.058	.046	.036	.019	.015	.012	
3.0	.163	.116	.077	.140	.100	.067	.096	.069	.047	.056	.040	.028	.018	.013	.009	
4.0	.156	.102	.061	.134	.088	.053	.092	.061	.037	.053	.036	.022	.017	.012	.007	
5.0	.149	.092	.049	.128	.079	.043	.088	.055	.030	.051	.033	.018	.016	.011	.006	
6.0	.142	.083	.041	.122	.072	.036	.084	.050	.025	.049	.030	.015	.016	.010	.005	
7.0	.135	.076	.035	.116	.066	.031	.080	.046	.022	.047	.027	.013	.015	.009	.004	
8.0	.129	.071	.030	.111	.061	.027	.077	.043	.019	.045	.025	.011	.014	.008	.004	
9.0	.123	.066	.027	.106	.057	.023	.073	.040	.017	.043	.024	.010	.014	.008	.003	
10.0	.117	.061	.024	.101	.053	.021	.070	.037	.015	.041	.022	.009	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

UGR(Unified Glare Rating) Table

NAME: LED TRI-PROOF LIGHT		TYPE:BAWATY-24W-SW-40				WEIGHT:				
SPEC.:24W 4000K		DIM.: L:1267mm				SERIAL No.:				
MFR.: DIMON TECHNOLOGY LTD		SUR.:				Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	25.1	26.6	25.4	26.8	27.0	25.1	26.6	25.4	26.8	27.0
3H	26.2	27.6	26.5	27.8	28.1	26.2	27.6	26.5	27.8	28.0
4H	26.5	27.8	26.8	28.1	28.3	26.4	27.7	26.8	28.0	28.2
6H	26.6	27.8	26.9	28.0	28.3	26.5	27.7	26.8	28.0	28.3
8H	26.5	27.7	26.9	28.0	28.3	26.5	27.6	26.8	27.9	28.2
12H	26.5	27.6	26.8	27.9	28.2	26.4	27.5	26.8	27.8	28.1
4H 2H	25.6	26.9	25.9	27.2	27.4	25.6	26.9	25.9	27.2	27.4
3H	26.9	28.0	27.2	28.3	28.6	26.8	28.0	27.2	28.3	28.6
4H	27.2	28.3	27.6	28.6	28.9	27.2	28.2	27.5	28.5	28.8
6H	27.3	28.2	27.7	28.6	29.0	27.3	28.2	27.7	28.5	28.9
8H	27.3	28.2	27.7	28.5	28.9	27.2	28.1	27.7	28.4	28.8
12H	27.3	28.0	27.7	28.4	28.8	27.2	28.0	27.6	28.4	28.8
8H 4H	27.3	28.2	27.7	28.5	28.9	27.3	28.1	27.7	28.5	28.9
6H	27.5	28.2	27.9	28.6	29.0	27.4	28.1	27.8	28.5	28.9
8H	27.5	28.1	27.9	28.5	28.9	27.4	28.0	27.9	28.4	28.9
12H	27.4	28.0	27.9	28.4	28.9	27.4	27.9	27.8	28.3	28.8
12H 4H	27.3	28.1	27.7	28.4	28.9	27.2	28.0	27.7	28.4	28.8
6H	27.4	28.1	27.9	28.5	28.9	27.4	28.0	27.8	28.4	28.9
8H	27.4	28.0	27.9	28.4	28.9	27.4	27.9	27.9	28.3	28.8
Variations with the observer position at spacings:										
S = 1.0H	+ 0.3 / - 0.3					+ 0.2 / - 0.3				
1.5H	+ 0.2 / - 0.4					+ 0.2 / - 0.4				
2.0H	+ 0.4 / - 0.4					+ 0.4 / - 0.4				

CIE Pub.117, 3000 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 3.8)

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

UTILIZATION FACTORS TABLE

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-24W-SW-40	WEIGHT:
SPEC.:24W 4000K	DIM.: L:1267mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	59	47	40	58	47	40	57	46	40	34
0.80	69	58	50	68	57	50	66	56	50	43
1.00	78	67	60	76	66	60	74	68	59	52
1.25	85	75	68	83	74	68	81	73	67	60
1.50	90	80	74	88	80	73	85	78	72	65
2.00	97	89	83	95	87	82	91	85	80	73
2.50	100	93	87	98	92	87	95	89	85	77
3.00	104	97	92	101	96	91	98	93	89	81
4.00	107	102	98	105	100	97	101	97	94	85
5.00	110	105	102	107	103	100	103	100	97	88
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16


γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

ISOCANDELA DIAGRAM

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-24W-SW-40	WEIGHT:
SPEC.:24W 4000K	DIM.: L:1267mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

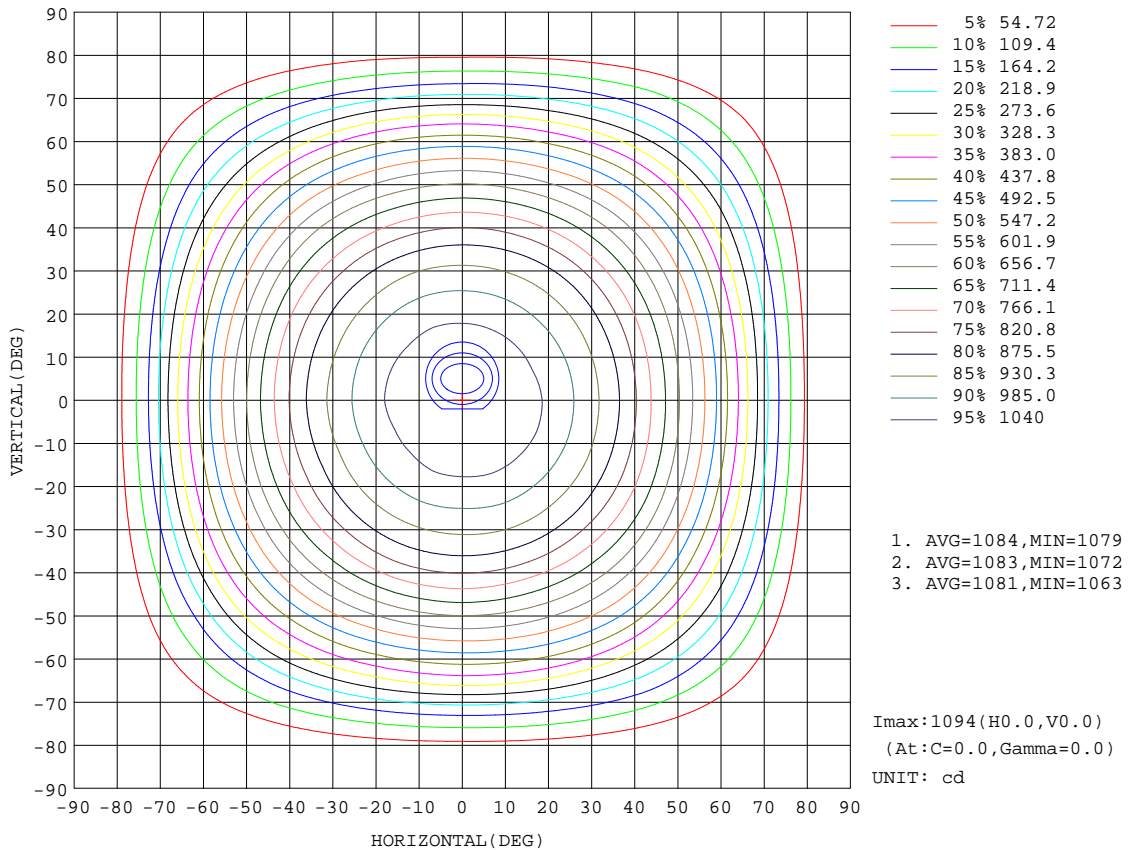

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16


γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

AAI Figure

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-24W-SW-40	WEIGHT:
SPEC.:24W 4000K	DIM.: L:1267mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

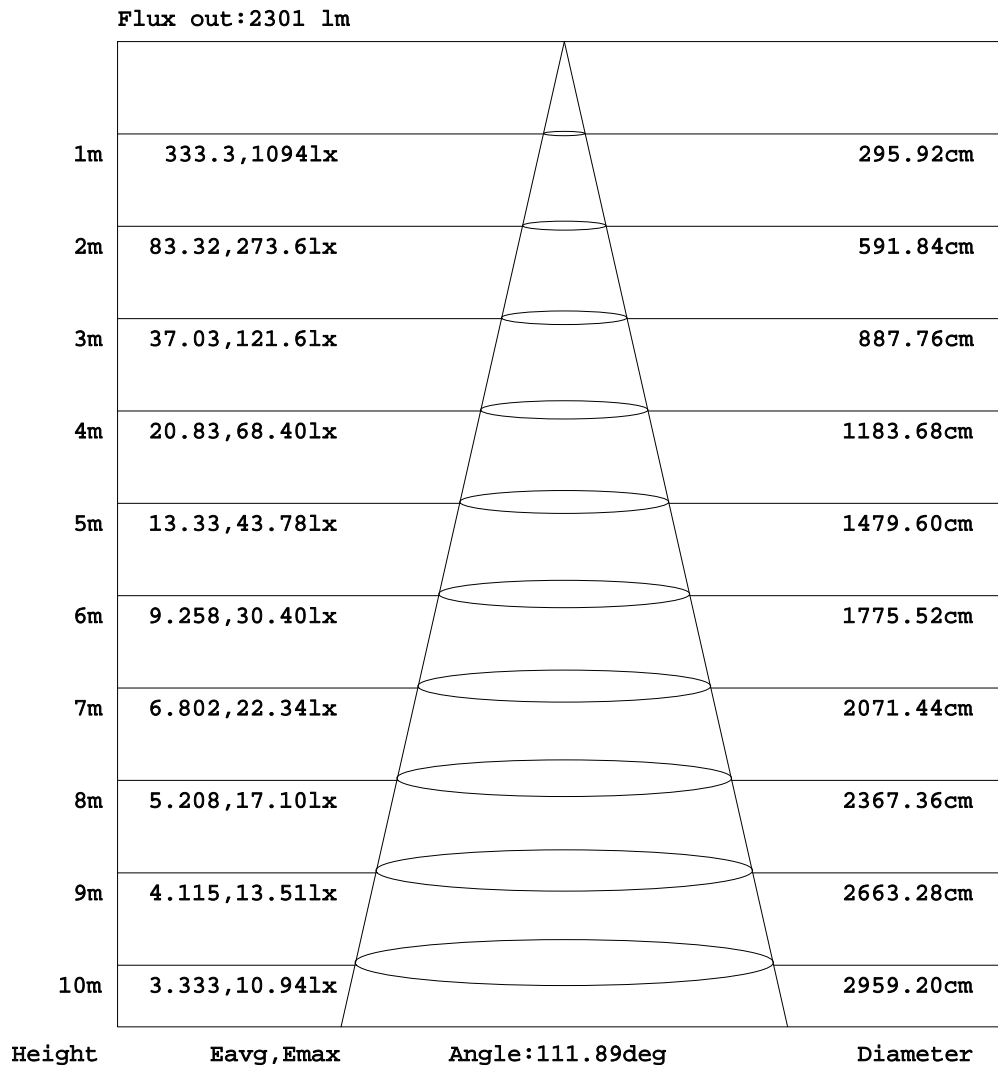

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16


γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

ISOLUX DIAGRAM

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-24W-SW-40	WEIGHT:
SPEC.:24W 4000K	DIM.: L:1267mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

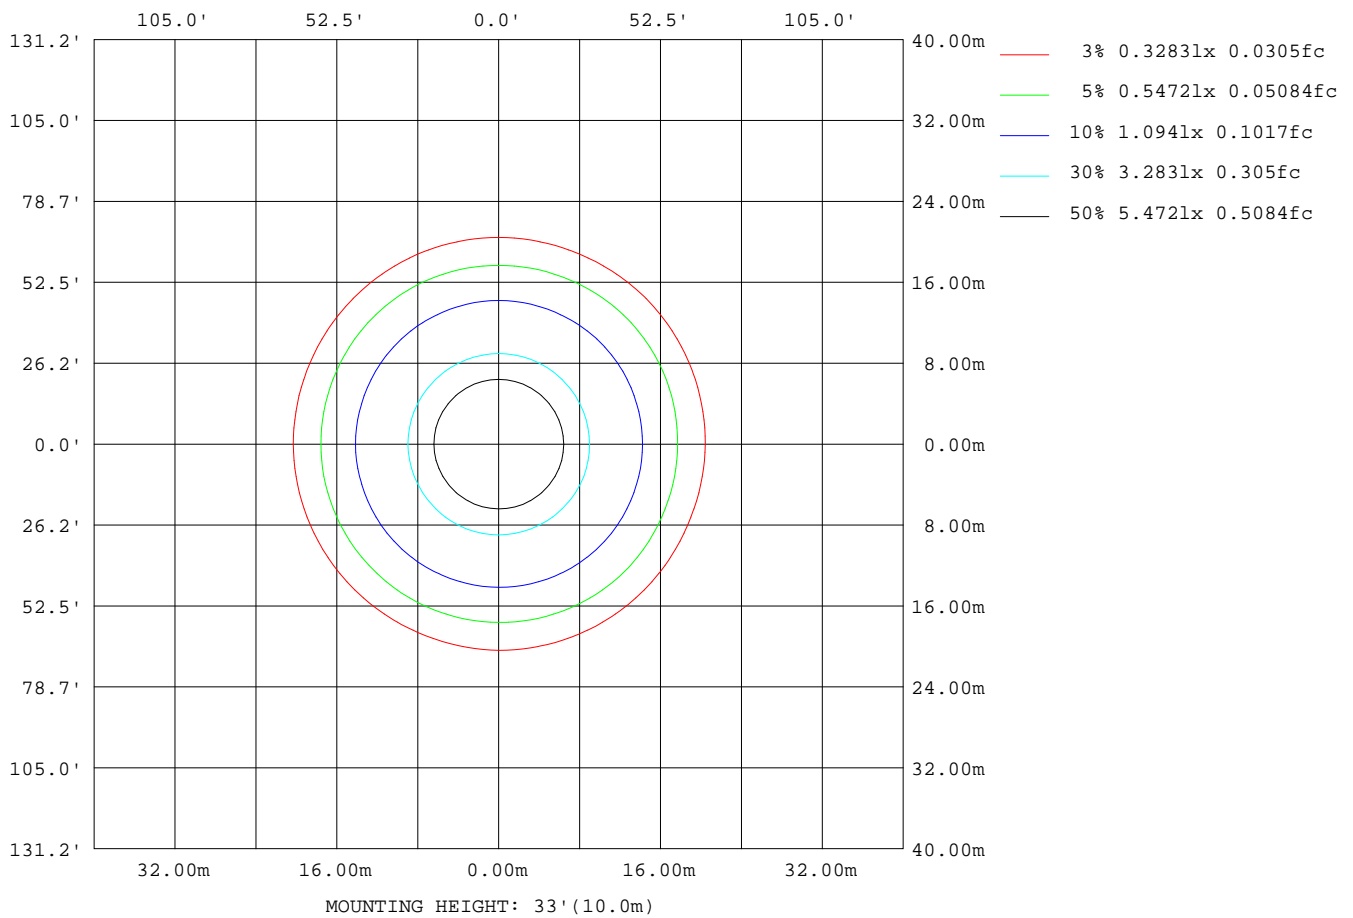


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

Planar Illuminance Curve

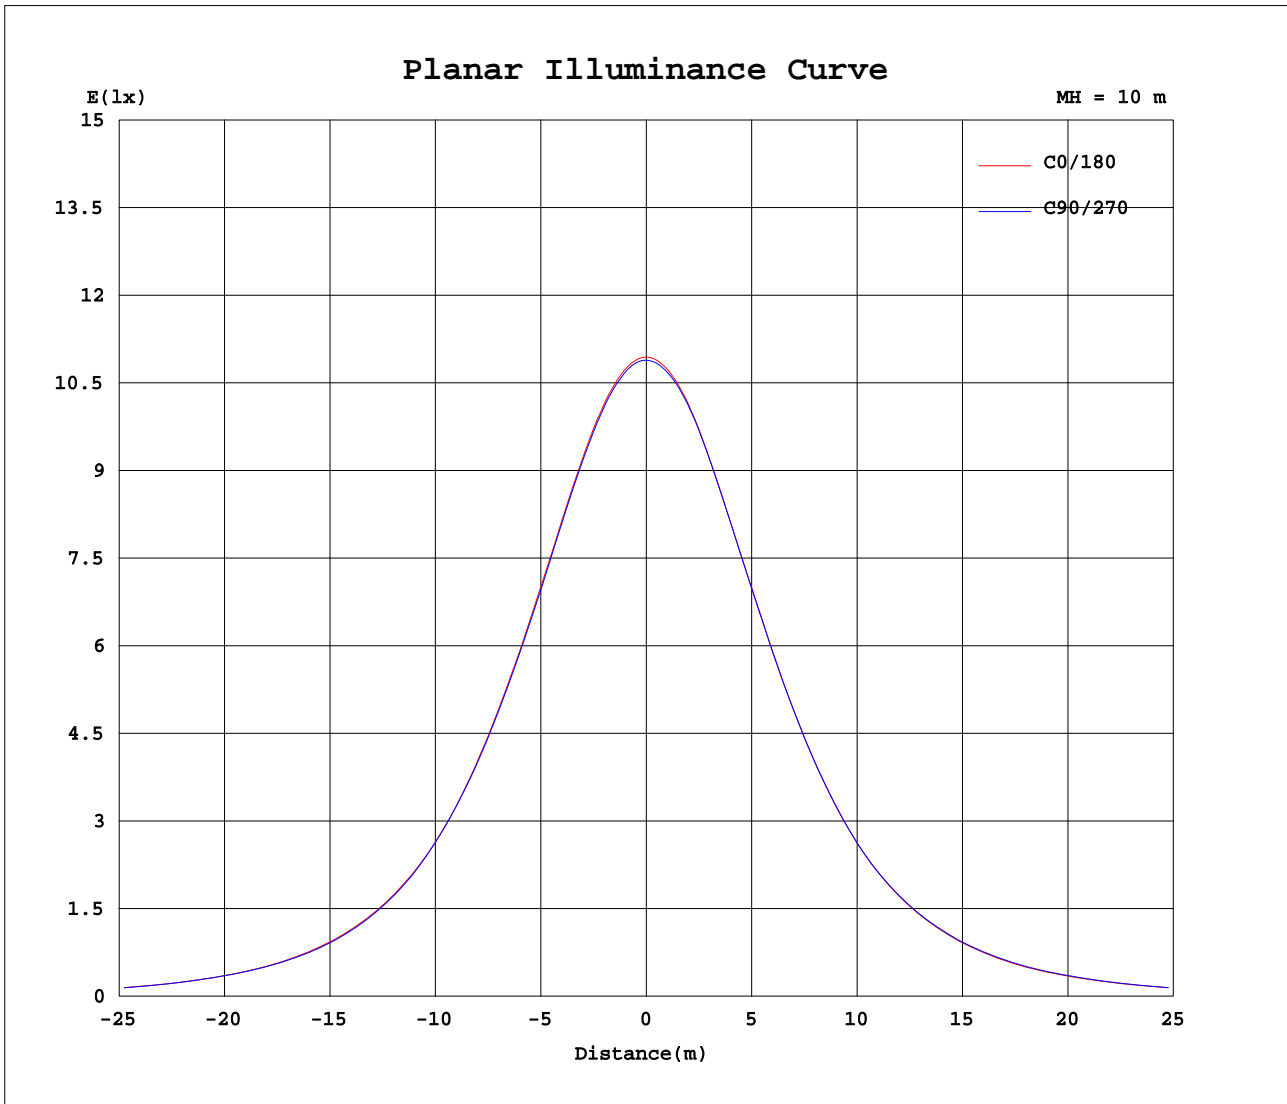

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 24.5DEG
 Operators: William
 Test Date: 2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity: 65.7%
 Test Distance: 26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-24W-SW-40	WEIGHT:
SPEC.:24W 4000K	DIM.: L:1267mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	1094	1093	1092	1091	1089	1088	1087	1087	1094	1093	1092	1091	1089	1088	1087	1087			
5	1090	1089	1089	1088	1086	1085	1083	1083	1090	1088	1087	1087	1085	1084	1084	1083			
10	1079	1079	1079	1078	1074	1074	1071	1073	1079	1077	1075	1076	1076	1074	1073	1073			
15	1060	1060	1058	1057	1054	1054	1052	1052	1057	1057	1055	1057	1056	1055	1054	1053			
20	1030	1031	1030	1028	1025	1026	1021	1020	1026	1026	1026	1028	1025	1025	1025	1026			
25	992	993	991	990	986	987	985	985	989	989	989	990	988	988	987	989			
30	948	948	946	946	942	941	939	938	946	943	942	945	944	944	944	945			
35	894	893	891	891	888	887	884	882	889	889	887	887	888	888	890	891			
40	826	827	822	822	823	822	816	816	823	821	818	819	822	821	823	824			
45	746	750	744	741	745	741	735	736	741	741	738	738	743	744	743	746			
50	663	664	660	656	656	652	651	652	656	653	657	656	660	658	662	663			
55	571	570	571	567	563	559	560	557	563	560	565	566	570	568	573	572			
60	471	467	472	468	464	460	458	457	459	460	466	469	468	469	477	476			
65	360	354	356	357	358	347	348	350	352	351	353	358	361	359	365	364			
70	240	240	240	238	233	232	231	222	229	234	235	239	240	243	249	250			
75	134	135	134	131	126	126	124	119	121	130	134	133	135	138	144	141			
80	44.6	47.8	46.6	45.1	45.4	42.6	44.3	39.0	42.1	45.5	48.4	50.6	46.9	52.5	54.1	53.7			
85	8.09	7.29	6.90	6.22	5.56	5.43	5.12	5.35	5.75	7.15	7.49	9.19	7.98	8.27	8.77	9.88			
90	0.20	0.17	0.10	0.12	0.10	0.12	0.12	0.10	0.07	0.87	0.07	0.07	0.33	0.02	0.94	0.35			
95	0.07	0.07	0.09	0.10	0.08	0.08	0.07	0.08	0.09	0.28	0.09	0.10	0.07	0.08	0.07	0.10			
100	0.06	0.07	0.09	0.10	0.09	0.10	0.08	0.08	0.22	0.21	0.21	0.21	0.21	0.19	0.19	0.19			
105	0.06	0.08	0.08	0.11	0.10	0.11	0.09	0.09	0.38	0.36	0.36	0.38	0.36	0.38	0.38	0.36			
110	0.05	0.09	0.07	0.12	0.11	0.13	0.09	0.09	0.59	0.52	0.55	0.57	0.57	0.57	0.55	0.55			
115	0.12	0.15	0.14	0.16	0.17	0.12	0.12	0.17	0.78	0.74	0.76	0.76	0.76	0.76	0.76	0.76			
120	0.38	0.31	0.38	0.36	0.33	0.26	0.31	0.29	0.94	0.93	0.89	0.85	0.95	0.93	0.98	0.90			
125	0.57	0.52	0.50	0.62	0.59	0.54	0.47	0.50	1.00	1.00	0.92	0.86	0.99	0.97	1.00	1.00			
130	0.81	0.76	0.76	0.86	0.83	0.76	0.64	0.77	1.14	1.02	0.98	0.93	1.03	1.00	1.05	1.05			
135	1.14	0.97	1.00	1.14	1.12	1.02	0.81	0.95	1.19	1.05	1.02	1.09	1.19	1.07	1.13	1.14			
140	1.49	1.35	1.31	1.54	1.50	1.50	1.16	1.40	1.31	1.19	1.09	1.21	1.24	1.26	1.24	1.24			
145	1.68	1.61	1.57	1.81	1.74	1.69	1.52	1.55	1.42	1.31	1.23	1.43	1.50	1.50	1.38	1.41			
150	1.85	1.88	1.88	1.93	1.90	1.93	1.76	1.69	1.61	1.52	1.47	1.69	1.71	1.71	1.71	1.62			
155	1.97	2.02	1.99	2.02	1.92	1.95	1.95	1.88	1.85	1.78	1.76	1.90	1.83	1.88	1.81	1.88			
160	2.06	2.04	2.07	2.06	2.02	2.02	2.00	1.98	1.97	1.92	1.89	2.00	2.07	1.95	1.97	1.93			
165	2.28	2.21	2.21	2.26	2.28	2.14	2.16	2.17	2.04	2.07	2.02	2.07	2.14	2.09	2.14	2.03			
170	2.33	2.31	2.37	2.45	2.47	2.35	2.30	2.33	2.18	2.21	2.19	2.28	2.28	2.33	2.38	2.21			
175	2.49	2.40	2.54	2.60	2.58	2.45	2.47	2.41	2.42	2.38	2.38	2.48	2.45	2.45	2.45	2.38			
180	2.54	2.42	2.54	2.62	2.54	2.45	2.47	2.41	2.47	2.54	2.42	2.54	2.57	2.57	2.45	2.48			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE