
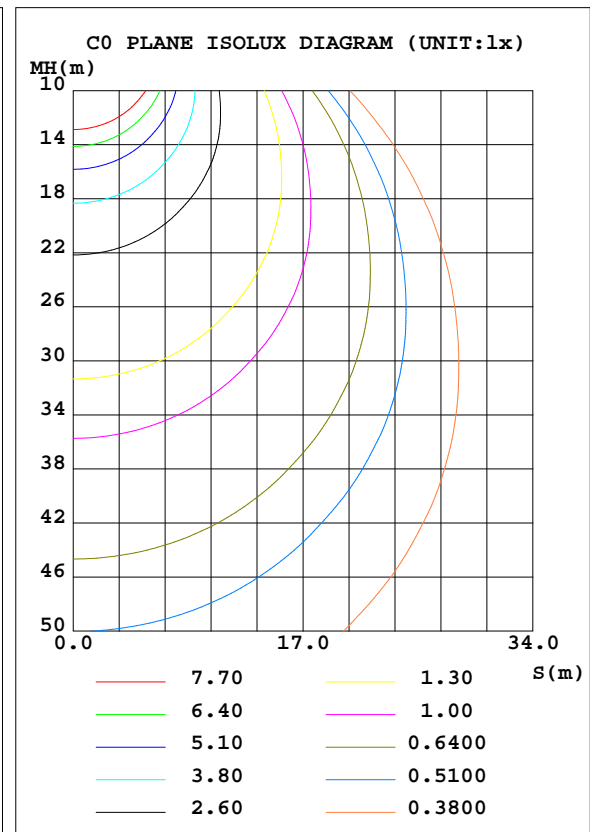


LUMINAIRE PHOTOMETRIC TEST REPORT

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-28W-SW-40	WEIGHT:
SPEC.:28W 4000K	DIM.: L:1267mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 125.00 lm/W			
MODEL	BAWATY-28W-SW-40	Imax(cd)	1277	S/MH(C0/180)	1.28
NOMINAL POWER(W)	28	LOR(%)	100.0	S/MH(C90/270)	1.29
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	3500.1	η UP, DN(C0-180)	0.1,49.8
NOMINAL FLUX(lm)	3500	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.1,50.0
LAMPS INSIDE	1	η up(%)	0.2	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	220	η down(%)	99.8	CIBSE SHR MAX	1.35

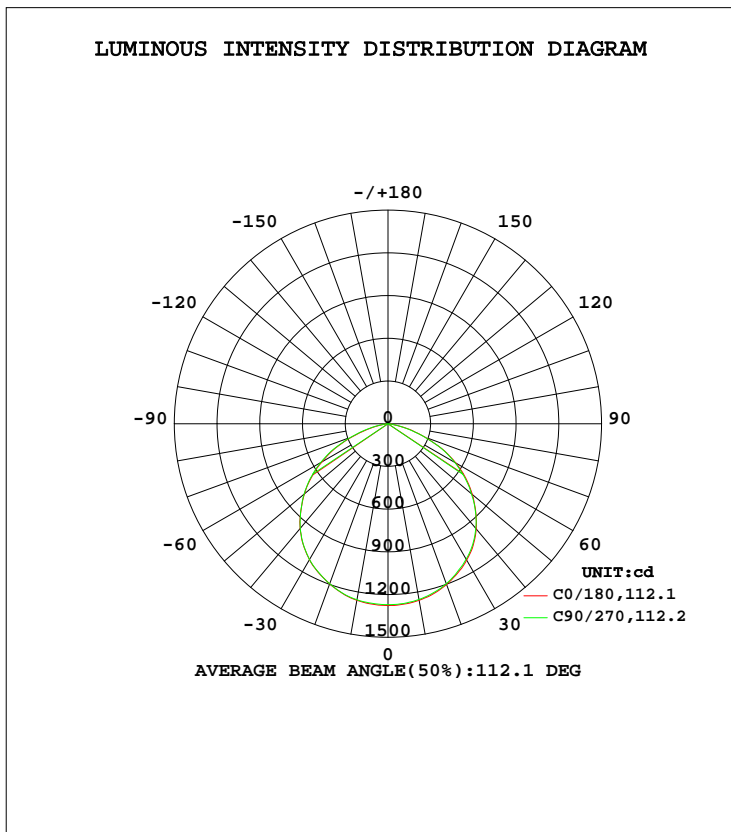

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1259	1259	1253	1250	1259	1255	1255	1252	0- 10	120.6	120.6	3.45,3.45
20	1202	1201	1196	1192	1197	1197	1196	1195	10- 20	347.7	468.3	13.4,13.4
30	1106	1103	1099	1096	1103	1099	1102	1101	20- 30	532.0	1000	28.6,28.6
40	964.0	959.3	959.6	951.6	960.2	954.6	958.9	960.0	30- 40	647.9	1648	47.1,47.1
50	773.9	769.9	765.6	759.1	765.9	766.7	770.0	772.2	40- 50	667.6	2316	66.2,66.2
60	548.9	550.6	541.9	534.6	535.5	543.2	546.3	556.1	50- 60	589.2	2905	83,83
70	279.9	280.1	272.2	269.1	267.5	273.9	280.6	290.6	60- 70	408.0	3313	94.7,94.7
80	52.05	54.34	52.94	51.67	49.11	56.44	54.70	63.06	70- 80	165.0	3478	99.4,99.4
90	0.2276	0.1207	0.1137	0.1386	0.0825	0.0823	0.3863	1.098	80- 90	16.32	3494	99.8,99.8
100	0.0723	0.0998	0.1074	0.0929	0.2509	0.2503	0.2497	0.2219	90-100	0.1566	3494	99.8,99.8
110	0.0575	0.0846	0.1334	0.1067	0.6929	0.6373	0.6659	0.6395	100-110	0.2839	3495	99.8,99.8
120	0.4418	0.4417	0.3876	0.3580	1.091	1.034	1.110	1.138	110-120	0.5256	3495	99.9,99.9
130	0.9413	0.8863	0.9696	0.7474	1.329	1.145	1.204	1.220	120-130	0.7916	3496	99.9,99.9
140	1.738	1.523	1.747	1.358	1.524	1.275	1.444	1.441	130-140	0.9690	3497	99.9,99.9
150	2.160	2.188	2.218	2.051	1.884	1.718	1.997	1.996	140-150	1.113	3498	99.9,99.9
160	2.398	2.410	2.358	2.328	2.295	2.210	2.413	2.300	150-160	1.015	3499	100,100
170	2.714	2.769	2.884	2.688	2.548	2.550	2.659	2.771	160-170	0.7047	3500	100,100
180	2.963	2.964	2.969	2.882	2.880	2.825	2.996	2.855	170-180	0.2682	3500	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 1986 lm

%lum = 56.7%
%lamp = 56.7%

Conical surface Flux(120deg): 2904.9 lm

%lum = 83.0%
%lamp = 83.0%

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:24.5DEG
Operators:William
Test Date:2017-12-16


γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
Humidity:65.7%
Test Distance:26.000m [K=1.4470]
Remarks:

Checker: DENNY

Assessor: JOE

LUMINANCE LIMITATION CURVES

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-28W-SW-40	WEIGHT:
SPEC.:28W 4000K	DIM.: L:1267mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

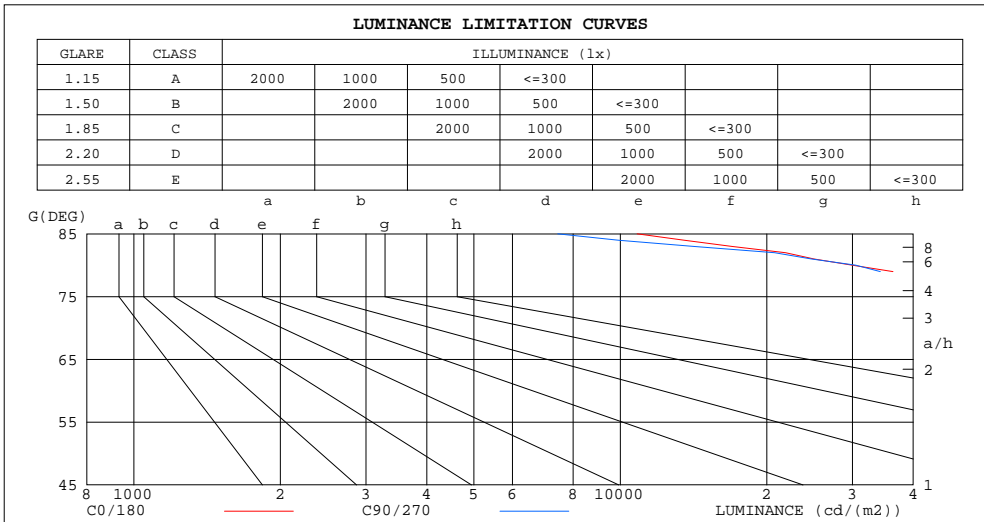

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	10832	7438
80	29972	30485
75	60251	56837
70	81839	79575
65	99275	98923
60	109790	108374
55	116230	114549
50	120398	119112
45	123149	122896

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:


Checker: DENNY

Assessor: JOE

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-28W-SW-40	WEIGHT:
SPEC.:28W 4000K	DIM.: L:1267mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pw																
pfc																
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.05	1.01	.98	1.03	.99	.96	.99	.96	.93	.95	.92	.90	.91	.89	.88	.86
2.0	.92	.86	.80	.90	.84	.79	.87	.82	.78	.84	.79	.76	.81	.77	.74	.72
3.0	.81	.73	.67	.80	.72	.67	.77	.71	.65	.74	.69	.64	.71	.67	.63	.61
4.0	.72	.64	.57	.71	.63	.57	.68	.61	.56	.66	.60	.55	.64	.59	.54	.52
5.0	.64	.56	.49	.63	.55	.49	.61	.54	.48	.59	.53	.48	.57	.52	.47	.45
6.0	.58	.49	.43	.57	.49	.43	.55	.48	.42	.54	.47	.42	.52	.46	.42	.40
7.0	.53	.44	.38	.52	.44	.38	.50	.43	.37	.49	.42	.37	.47	.41	.37	.35
8.0	.48	.40	.34	.47	.39	.34	.46	.39	.33	.45	.38	.33	.44	.38	.33	.31
9.0	.44	.36	.30	.43	.36	.30	.42	.35	.30	.41	.35	.30	.40	.34	.30	.28
10.0	.41	.33	.28	.40	.33	.27	.39	.32	.27	.38	.32	.27	.37	.31	.27	.25

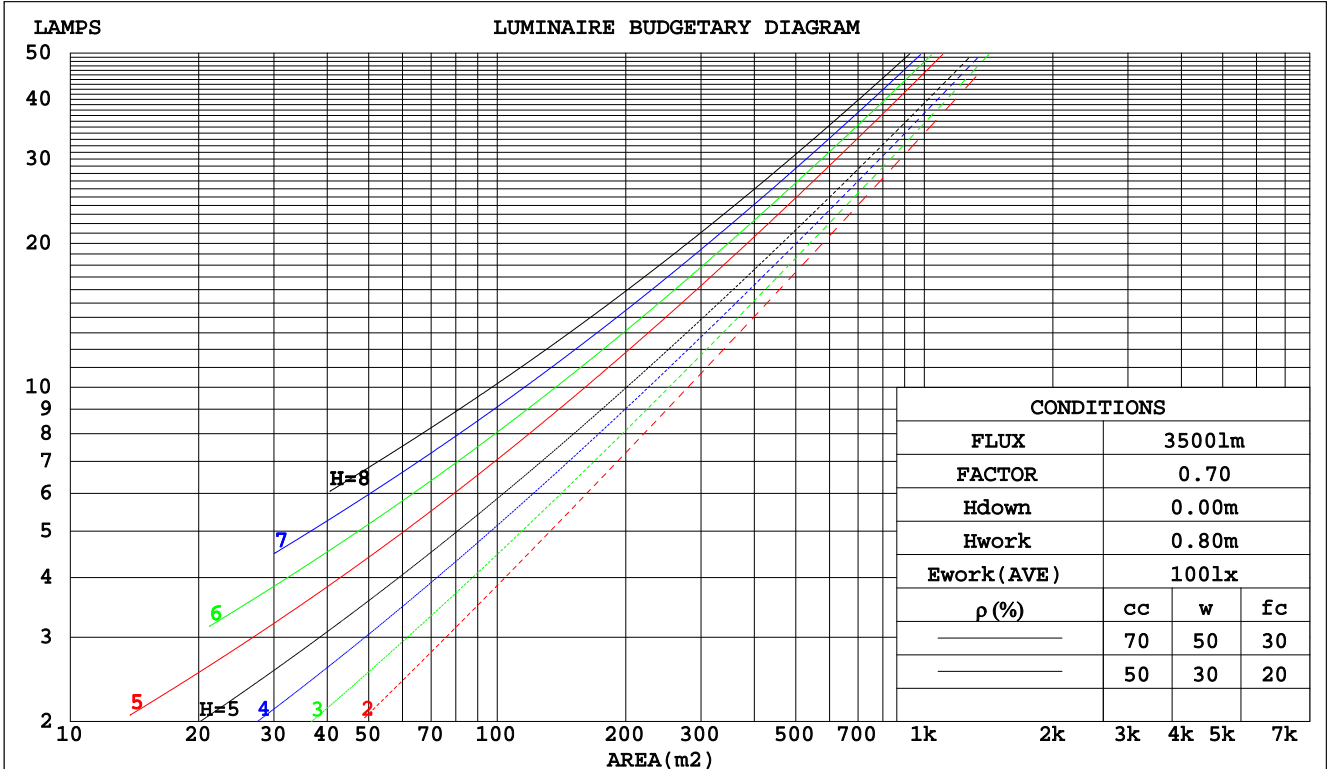

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

WEC AND CCEC

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-28W-SW-40	WEIGHT:
SPEC.:28W 4000K	DIM.: L:1267mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.282	.161	.051	.275	.157	.050	.262	.150	.048	.250	.144	.046	.239	.138	.045	
2.0	.274	.150	.046	.267	.147	.045	.256	.142	.044	.245	.138	.043	.235	.133	.042	
3.0	.257	.137	.041	.252	.135	.041	.242	.131	.040	.232	.127	.039	.223	.124	.038	
4.0	.240	.125	.037	.235	.123	.036	.226	.120	.036	.218	.117	.035	.210	.114	.035	
5.0	.224	.114	.033	.219	.113	.033	.211	.110	.032	.204	.107	.032	.197	.105	.032	
6.0	.208	.105	.030	.205	.103	.030	.197	.101	.029	.191	.099	.029	.184	.097	.029	
7.0	.195	.096	.027	.191	.095	.027	.185	.093	.027	.179	.092	.027	.173	.090	.026	
8.0	.182	.089	.025	.179	.088	.025	.174	.087	.025	.168	.085	.025	.163	.084	.024	
9.0	.171	.083	.023	.169	.082	.023	.163	.081	.023	.159	.079	.023	.154	.078	.023	
10.0	.161	.077	.021	.159	.077	.021	.154	.076	.021	.150	.074	.021	.146	.073	.021	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.180	.158	.138	.154	.135	.119	.105	.093	.082	.061	.054	.048	.019	.017	.015	
2.0	.171	.133	.101	.147	.115	.088	.100	.079	.061	.058	.046	.036	.019	.015	.012	
3.0	.163	.116	.077	.140	.100	.067	.096	.069	.047	.056	.040	.028	.018	.013	.009	
4.0	.156	.102	.061	.134	.088	.053	.092	.061	.037	.053	.036	.022	.017	.012	.007	
5.0	.149	.092	.049	.128	.079	.043	.088	.055	.030	.051	.033	.018	.016	.011	.006	
6.0	.142	.083	.041	.122	.072	.036	.084	.050	.025	.049	.030	.015	.016	.010	.005	
7.0	.135	.076	.035	.116	.066	.031	.080	.046	.022	.047	.027	.013	.015	.009	.004	
8.0	.129	.071	.030	.111	.061	.027	.077	.043	.019	.045	.025	.011	.014	.008	.004	
9.0	.123	.066	.027	.106	.057	.023	.073	.040	.017	.043	.024	.010	.014	.008	.003	
10.0	.117	.061	.024	.101	.053	.021	.070	.037	.015	.041	.022	.009	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

UGR(Unified Glare Rating) Table

NAME: LED TRI-PROOF LIGHT		TYPE:BAWATY-28W-SW-40					WEIGHT:				
SPEC.:28W 4000K		DIM.: L:1267mm					SERIAL No.:				
MFR.: DIMON TECHNOLOGY LTD		SUR.:					Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	Viewed crosswise					Viewed endwise					
x = 2H y = 2H	25.1	26.6	25.4	26.8	27.0	25.1	26.6	25.4	26.8	27.0	
3H	26.2	27.6	26.5	27.8	28.1	26.2	27.6	26.5	27.8	28.0	
4H	26.5	27.8	26.8	28.1	28.3	26.4	27.7	26.8	28.0	28.2	
6H	26.6	27.8	26.9	28.0	28.3	26.5	27.7	26.8	28.0	28.3	
8H	26.5	27.7	26.9	28.0	28.3	26.5	27.6	26.8	27.9	28.2	
12H	26.5	27.6	26.8	27.9	28.2	26.4	27.5	26.8	27.8	28.1	
4H 2H	25.6	26.9	25.9	27.2	27.4	25.6	26.9	25.9	27.2	27.4	
3H	26.9	28.0	27.2	28.3	28.6	26.8	28.0	27.2	28.3	28.6	
4H	27.2	28.3	27.6	28.6	28.9	27.2	28.2	27.5	28.5	28.8	
6H	27.3	28.2	27.7	28.6	29.0	27.3	28.2	27.7	28.5	28.9	
8H	27.3	28.2	27.7	28.5	28.9	27.2	28.1	27.7	28.4	28.8	
12H	27.3	28.0	27.7	28.4	28.8	27.2	28.0	27.6	28.4	28.8	
8H 4H	27.3	28.2	27.7	28.5	28.9	27.3	28.1	27.7	28.5	28.9	
6H	27.5	28.2	27.9	28.6	29.0	27.4	28.1	27.8	28.5	28.9	
8H	27.5	28.1	27.9	28.5	28.9	27.4	28.0	27.9	28.4	28.9	
12H	27.4	28.0	27.9	28.4	28.9	27.4	27.9	27.8	28.3	28.8	
12H 4H	27.3	28.1	27.7	28.4	28.9	27.2	28.0	27.7	28.4	28.8	
6H	27.4	28.1	27.9	28.5	28.9	27.4	28.0	27.8	28.4	28.9	
8H	27.4	28.0	27.9	28.4	28.9	27.4	27.9	27.9	28.3	28.8	
Variations with the observer position at spacings:											
S = 1.0H	+ 0.3 / - 0.3					+ 0.2 / - 0.3					
1.5H	+ 0.2 / - 0.4					+ 0.2 / - 0.4					
2.0H	+ 0.4 / - 0.4					+ 0.4 / - 0.4					

CIE Pub.117, 3500 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 4.4)

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

UTILIZATION FACTORS TABLE

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-28W-SW-40	WEIGHT:
SPEC.:28W 4000K	DIM.: L:1267mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	59	47	40	58	47	40	57	46	40	34
0.80	69	58	50	68	57	50	66	56	50	43
1.00	78	67	60	76	66	60	74	68	59	52
1.25	85	75	68	83	74	68	81	73	67	60
1.50	90	80	74	88	80	73	85	78	72	65
2.00	97	89	83	95	87	82	91	85	80	73
2.50	100	93	87	98	92	87	95	89	85	77
3.00	104	97	92	101	96	91	98	93	89	81
4.00	107	102	98	105	100	97	101	97	94	85
5.00	110	105	102	107	103	100	103	100	97	88
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16


γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

ISOCANDELA DIAGRAM

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-28W-SW-40	WEIGHT:
SPEC.:28W 4000K	DIM.: L:1267mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

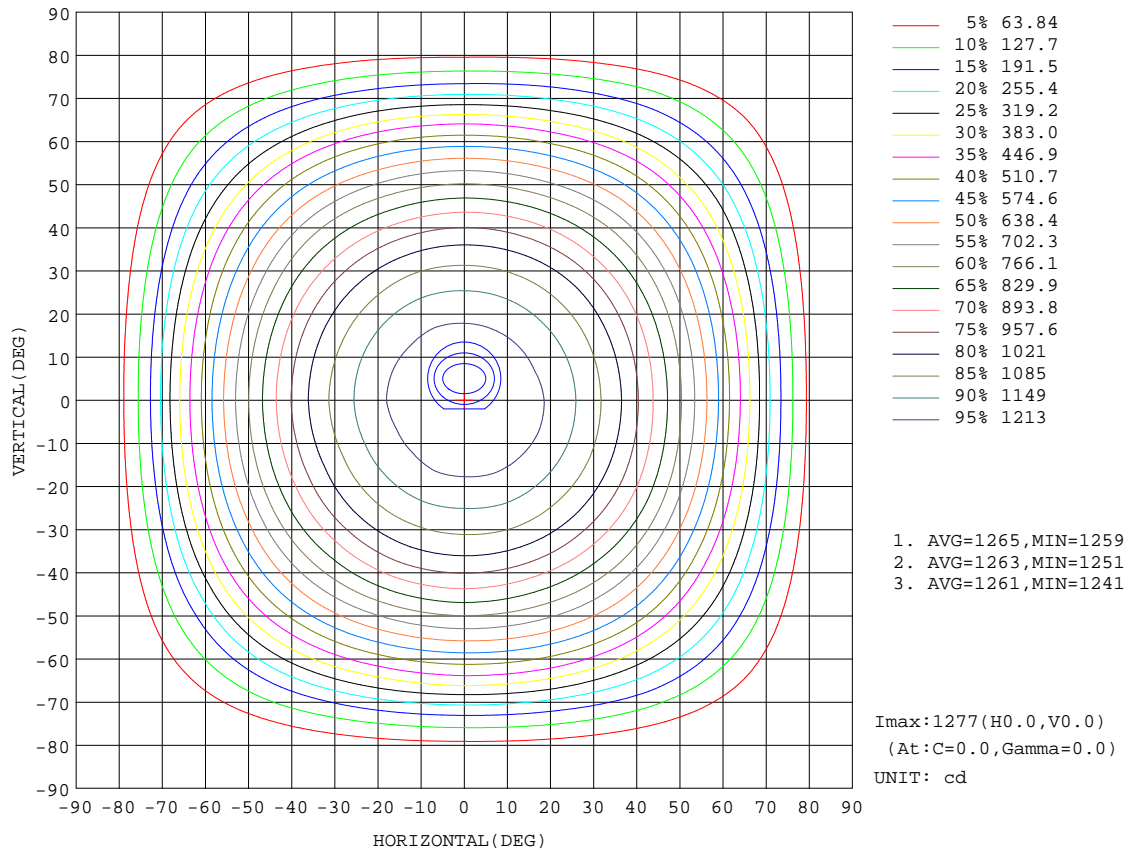

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16


γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

AAI Figure

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-28W-SW-40	WEIGHT:
SPEC.:28W 4000K	DIM.: L:1267mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

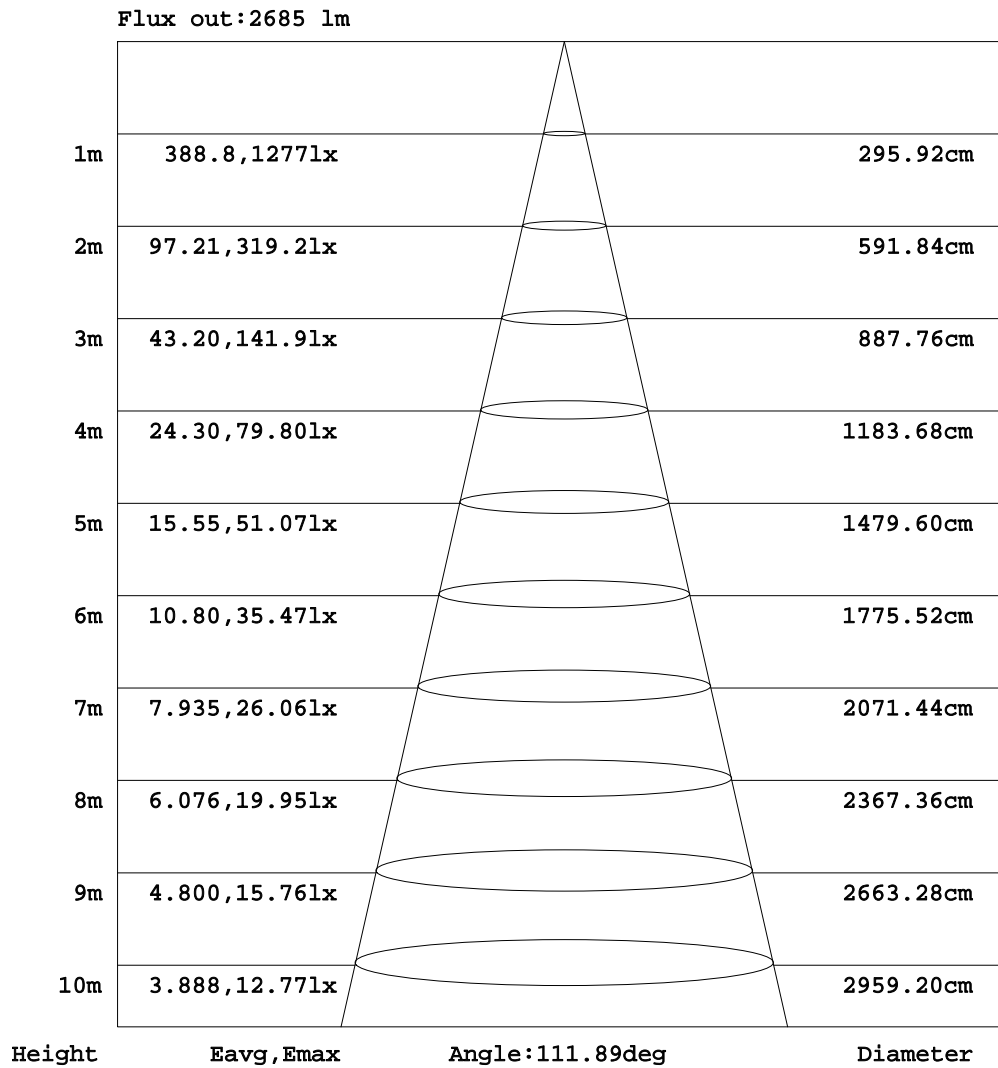

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16


γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

ISOLUX DIAGRAM

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-28W-SW-40	WEIGHT:
SPEC.:28W 4000K	DIM.: L:1267mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

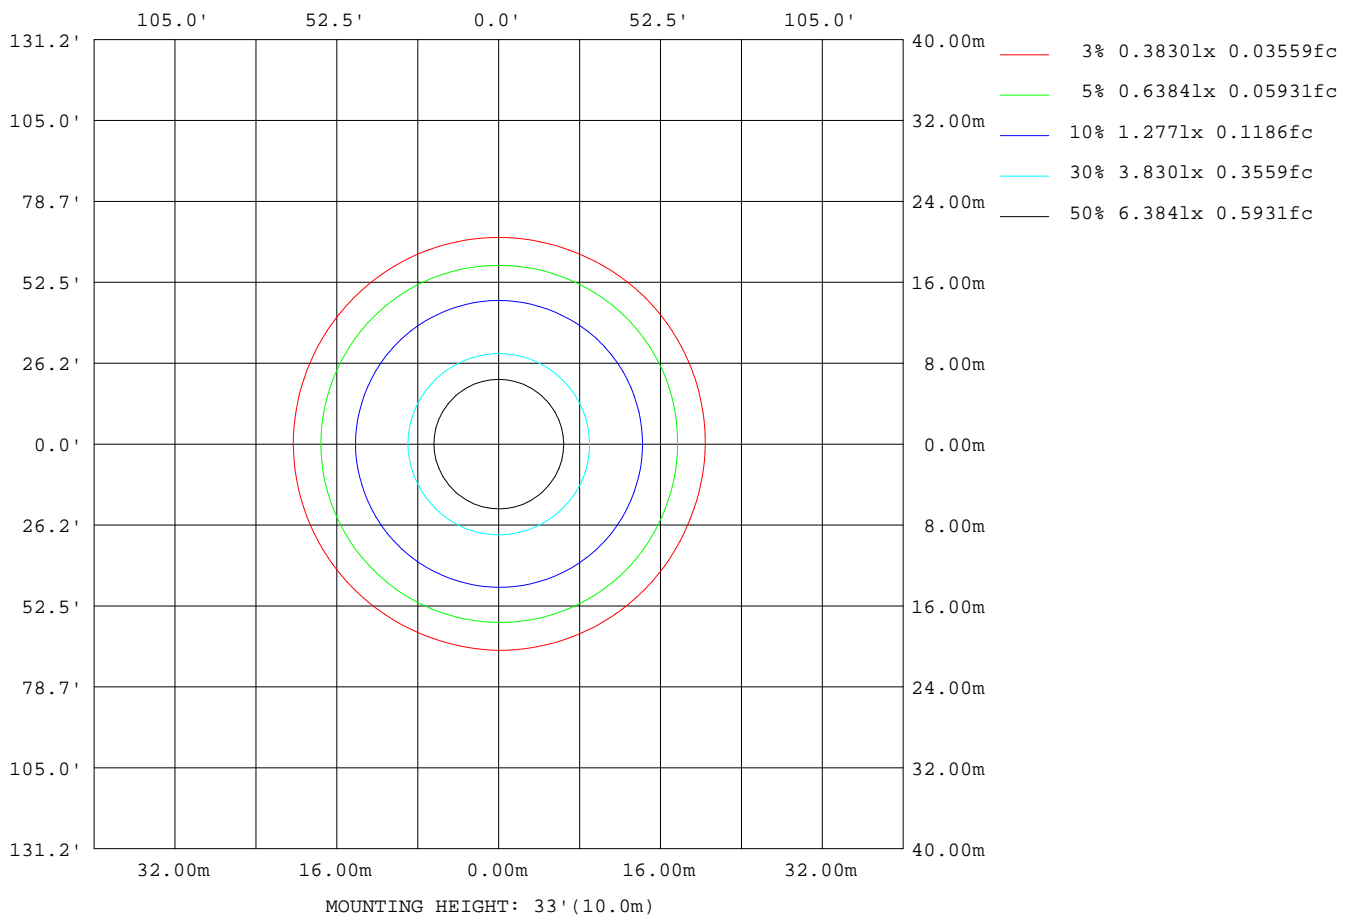


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

Planar Illuminance Curve

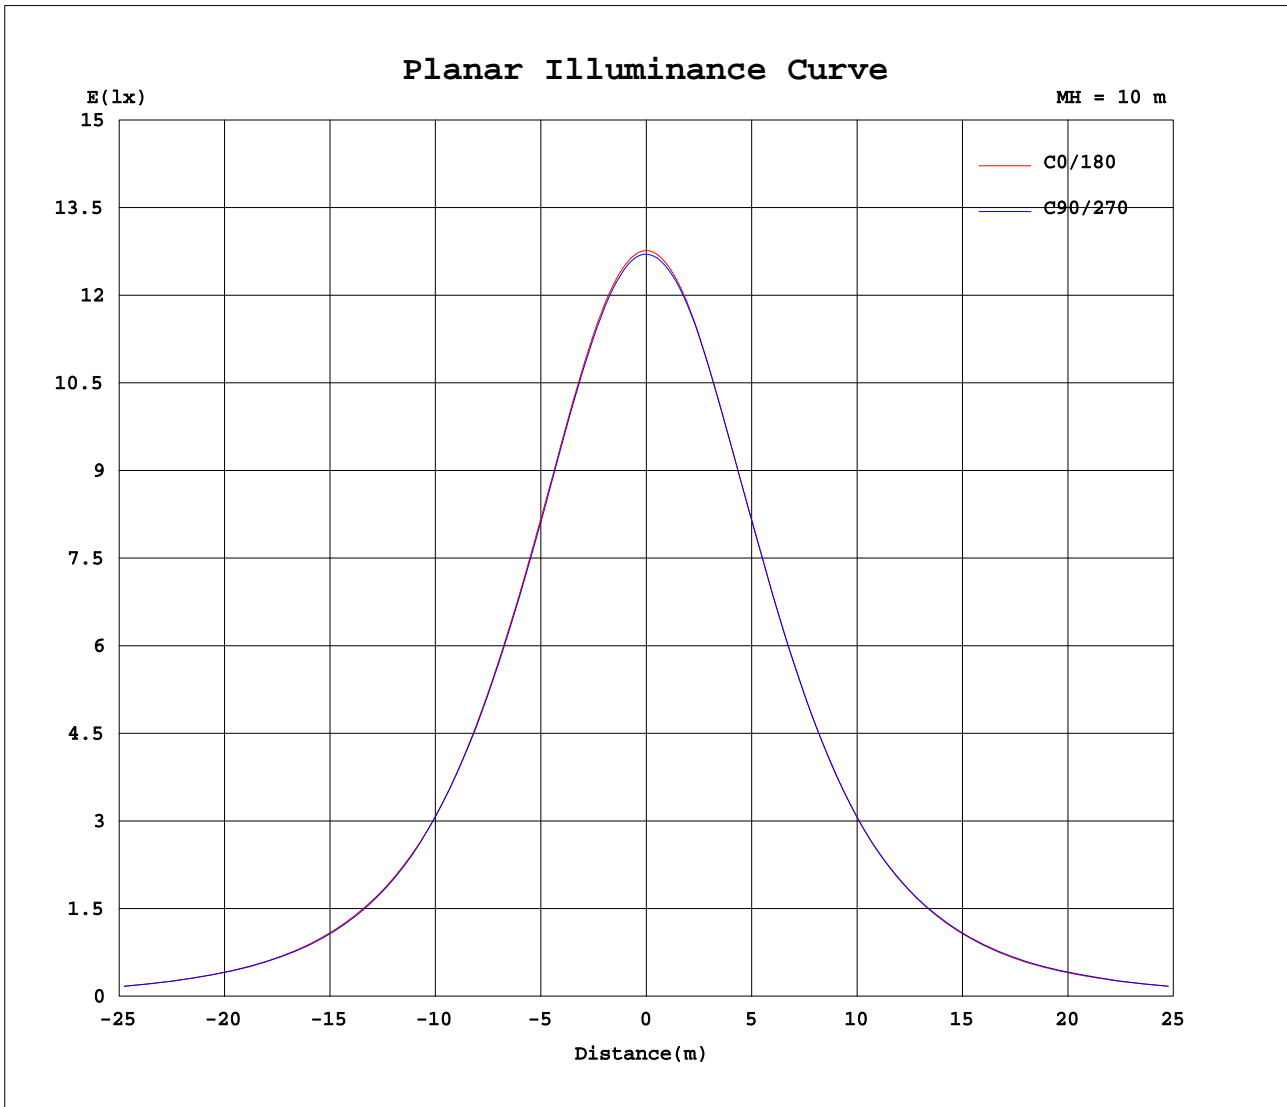

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 24.5DEG
 Operators: William
 Test Date: 2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity: 65.7%
 Test Distance: 26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-28W-SW-40	WEIGHT:
SPEC.:28W 4000K	DIM.: L:1267mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C(DEG)\ γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	1277	1275	1273	1272	1270	1269	1269	1268	1277	1275	1273	1272	1270	1269	1269	1268			
5	1272	1270	1270	1269	1267	1266	1264	1264	1272	1270	1268	1268	1266	1265	1264	1264			
10	1259	1259	1259	1257	1253	1253	1250	1251	1259	1257	1255	1255	1255	1253	1252	1252			
15	1236	1236	1235	1233	1229	1230	1227	1228	1234	1233	1231	1234	1232	1230	1230	1229			
20	1202	1203	1201	1200	1196	1197	1192	1190	1197	1197	1197	1199	1196	1195	1195	1197			
25	1157	1158	1156	1155	1150	1152	1150	1150	1154	1154	1154	1155	1153	1152	1152	1154			
30	1106	1106	1103	1104	1099	1098	1096	1095	1103	1100	1099	1103	1102	1101	1101	1103			
35	1043	1042	1040	1039	1037	1035	1031	1029	1038	1037	1035	1035	1036	1036	1038	1040			
40	964	965	959	959	960	958	952	952	960	958	955	955	959	958	960	962			
45	871	875	868	865	869	865	857	859	865	864	862	861	866	868	867	870			
50	774	775	770	766	766	761	759	761	766	762	767	765	770	768	772	773			
55	667	665	667	662	657	653	653	650	657	654	660	660	665	663	669	668			
60	549	545	551	546	542	537	535	533	535	536	543	547	546	548	556	555			
65	420	413	415	417	418	405	406	408	411	409	412	418	421	419	426	425			
70	280	280	280	278	272	271	269	259	267	273	274	279	281	283	291	292			
75	156	157	156	153	147	146	145	138	141	152	156	155	158	160	168	165			
80	52.0	55.7	54.3	52.6	52.9	49.7	51.7	45.5	49.1	53.1	56.4	59.0	54.7	61.3	63.1	62.6			
85	9.44	8.51	8.05	7.25	6.48	6.33	5.97	6.24	6.71	8.34	8.74	10.7	9.31	9.65	10.2	11.5			
90	0.23	0.20	0.12	0.14	0.11	0.14	0.14	0.11	0.08	1.02	0.08	0.08	0.39	0.03	1.10	0.41			
95	0.08	0.08	0.11	0.12	0.09	0.09	0.09	0.09	0.11	0.33	0.10	0.11	0.08	0.10	0.08	0.11			
100	0.07	0.08	0.10	0.12	0.11	0.11	0.09	0.10	0.25	0.25	0.25	0.25	0.25	0.22	0.22	0.22			
105	0.06	0.09	0.09	0.13	0.12	0.13	0.10	0.10	0.44	0.42	0.42	0.44	0.42	0.44	0.44	0.42			
110	0.06	0.11	0.08	0.14	0.13	0.15	0.11	0.11	0.69	0.61	0.64	0.67	0.67	0.67	0.64	0.64			
115	0.14	0.17	0.17	0.18	0.19	0.14	0.14	0.19	0.92	0.86	0.89	0.89	0.89	0.89	0.89	0.89			
120	0.44	0.36	0.44	0.42	0.39	0.30	0.36	0.33	1.09	1.08	1.03	0.99	1.11	1.08	1.14	1.06			
125	0.66	0.61	0.58	0.72	0.69	0.64	0.55	0.58	1.16	1.16	1.07	1.01	1.16	1.13	1.17	1.17			
130	0.94	0.89	0.89	1.00	0.97	0.89	0.75	0.90	1.33	1.19	1.14	1.08	1.20	1.17	1.22	1.22			
135	1.33	1.14	1.16	1.33	1.30	1.19	0.94	1.11	1.39	1.22	1.19	1.27	1.39	1.25	1.32	1.33			
140	1.74	1.58	1.52	1.80	1.75	1.75	1.36	1.63	1.52	1.39	1.27	1.41	1.44	1.47	1.44	1.45			
145	1.96	1.88	1.83	2.11	2.02	1.97	1.77	1.81	1.66	1.52	1.44	1.67	1.75	1.75	1.61	1.64			
150	2.16	2.19	2.19	2.25	2.22	2.25	2.05	1.97	1.88	1.77	1.72	1.97	2.00	2.00	2.00	1.89			
155	2.30	2.35	2.32	2.36	2.24	2.27	2.28	2.19	2.16	2.08	2.05	2.22	2.14	2.19	2.11	2.19			
160	2.40	2.38	2.41	2.41	2.36	2.36	2.33	2.31	2.30	2.24	2.21	2.33	2.41	2.28	2.30	2.25			
165	2.66	2.58	2.57	2.64	2.66	2.50	2.52	2.53	2.38	2.41	2.35	2.41	2.50	2.44	2.49	2.37			
170	2.71	2.69	2.77	2.86	2.88	2.75	2.69	2.72	2.55	2.58	2.55	2.66	2.66	2.72	2.77	2.57			
175	2.91	2.80	2.96	3.03	3.01	2.86	2.88	2.81	2.82	2.77	2.77	2.89	2.86	2.86	2.85	2.78			
180	2.96	2.83	2.96	3.05	2.97	2.86	2.88	2.81	2.88	2.96	2.83	2.97	3.00	3.00	2.85	2.89			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE