

DIMON Technology Limited  
Suite 14, 11/F, Cheung Hing Industrial Building  
23 Tai Yip Street, Kwun Tong  
Kowloon  
Hong Kong

Our reference: DIM-21-T018

Issue date: 19 July 2021

The self-contained emergency luminaire supplied by you was tested in our laboratory on 8 July 2021 and the results were presented as follows;


Description of luminaire:	DIMON" E-SOLO Emergency Lighting Unit Maintained, Self-contained, using LED Lamp
Complete set model:	BATESA-10-3; BAWATY-10-3; SLKWP-10-3;SLK-10-3; SLPP-10-3
Suitable converter model:	E-SOLO
Input:	AC 220-240V +/-10% 50Hz
Battery:	Sealed Ni-Cd / Ni-MH rechargeable battery pack (9.6V 3.6Ah)
Full charge period / Duration:	12 hours / 3 hours
Lamp type:	Up to 18W LED lamp or LED tube
Test button and charging LED:	Incorporated
Low voltage cut off:	Incorporated
Power cables:	The power cable connecting the power kit to the lamp is in a corrugated flexible metal conduit or no power cables extended outside the enclosure of the self-contained emergency luminaire.
Case:	BAWATY-10-3: The case is made of polycarbonate housing and diffuser. For other models, the case is made of metal housing and there is no exposed flammable part.

DIM-21-T018

44400(1)

Test procedures;

1. After 12 hours of charging at 220V 50 Hz AC supply, the emergency luminaire has attained 100% of its rated battery capacity.
2. The luminaire is positioned on a stand at 3 meters from a wall as shown below (not to scale);

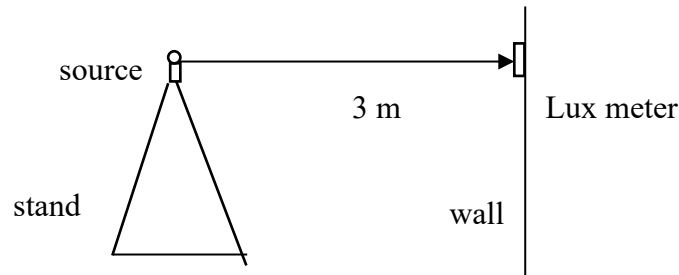

3. The room light is switched off. The normal supply is terminated by pulling the plug and the emergency light is automatically turned on.
4. The illuminance at a point on the wall which lies on the central axis of the emergency luminaire is measured at 5 s, 1 min, 30 min and then at 30 min intervals after the emergency light is turned on. The maximum duration of emergency light is noted.

The results are as follows;


Time (min)	Illuminance(lx) at 3 m along the central axis of the emergency luminaire
Normal	62.0
5 s	33.6
1	33.2
30	31.7
60	30.5
90	30.5
120	30.4
150	30.2
180	30.0

1. The total discharge time is 206 minutes at which the batteries were disconnected by the incorporated low voltage cut out device.
2. The emergency luminaire passed the resistance to flame and ignition at a temperature of 850°C as stipulated in clause 13.3.2 of IEC 60598-1:2020, clause 22.16 of BS EN 60598-2-22:2014+A1:2020 and IEC 60695-2-10:2013.

### Summary of compliance with PPA/104(A)(5<sup>th</sup> Revision)

Item	Test Requirement of PPA/104(A) (5 <sup>th</sup> Revision)	Verdict
B.3	Emergency lighting luminaires shall be compliant with the glow wire test as stated in sub-clause 13.3.2 of IEC 60598-1:2020 but at temperature of 850°C.	pass
B.4	All power cables extended outside the enclosure of a self-contained emergency lighting luminaire, other than the wiring connecting the luminaire to normal supply shall conform to: (a) BS EN 50200: 2015 (PH60) and Annex E of BS EN 50200: 2015 (a duration of survival time of 30 minutes) and one of the following standards: (i) BS EN 60702-1: 2002 +A1: 2015 & BS EN 60702-2: 2002 +A1: 2015 (ii) BS 7629-1: 2015 (Cat. Standard 60) (iii) BS 7846: 2015 (Cat. F2 for cables of overall diameter not exceeding 20mm); or (b) BS 6387: 2013 Cat. CWZ.	Must be complied with
B.5	An automatic trickle charger with a 220-volt input and suitable output and fitted with pilot lights or other indicating device shall be provided for the batteries. The charger shall be capable of re-charging the battery to 100% of the rated capacity in not more than 12 hours.	pass
B.6	The self-contained luminaires emergency lighting systems shall be capable of maintaining the stipulated lighting levels for a minimum period of 2 hours (rated duration).	pass
B.7	Upon failure of the normal lighting system or in the event of power failure, the emergency lighting shall automatically light up to at least 90% of the stipulated illumination level within 5 seconds.	pass
B.8	Each unit shall be provided with a properly labeled 'TEST' switch and charge monitor light. A low voltage cut out shall also be provided to disconnect the batteries when fully discharged.	pass

The test results from our measurement complied with the relevant sections of BS 5266-1:2016, BS EN 1838:2013 and relevant parts of BS EN 60598-2-22:2014+A1:2020 and regulation PPA / 104 (A) (5<sup>th</sup> Revision) of Fire Services Department specifications.

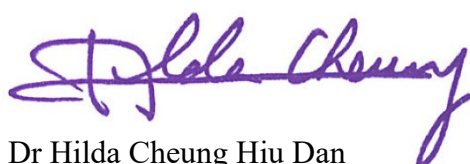

Dr Hilda Cheung Hiu Dan  
Instructor  
Department of Building Services Engineering



DIM-21-T018

44400(1)



This certificate is issued by PolyU Technology and Consultancy Co. Ltd. (PTeC) to DIMON Technology Limited for the Consultancy Service Agreement signed by both parties. PTeC is the wholly-owned subsidiary of The Hong Kong Polytechnic University (PolyU) and is assigned by the PolyU to deal with all commercial matters on its behalf for the undertaking of external consultancy projects.

This is to certify that the above test was conducted at the laboratory of Department of Building Services Engineering of The Hong Kong Polytechnic University with reference to the Agreement signed by both parties.