
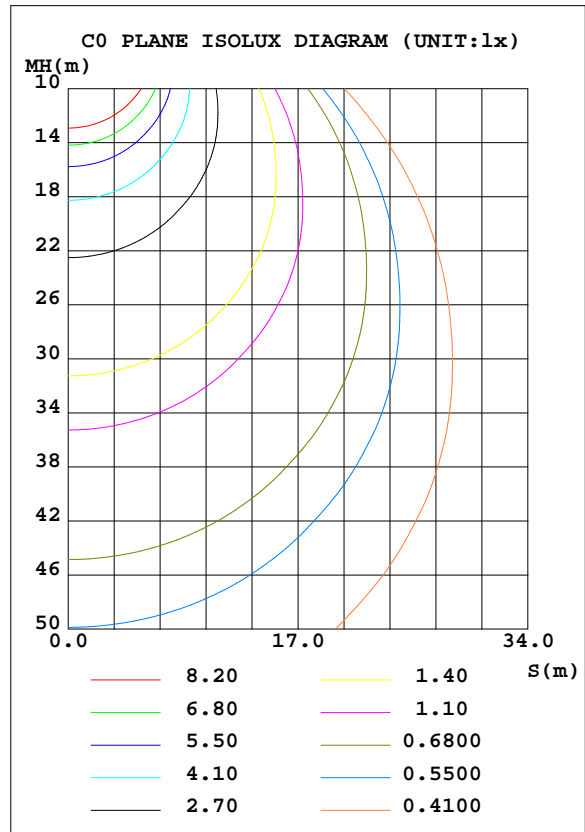


LUMINAIRE PHOTOMETRIC TEST REPORT

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-30W-SW-40	WEIGHT:
SPEC.:30W 4000K	DIM.: L:1267mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 125.00 lm/W			
MODEL	BAWATY-30W-SW-40	Imax(cd)	1368	S/MH(C0/180)	1.28
NOMINAL POWER(W)	30	LOR(%)	100.0	S/MH(C90/270)	1.29
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	3750.1	η UP, DN(C0-180)	0.1,49.8
NOMINAL FLUX(lm)	3750	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.1,50.0
LAMPS INSIDE	1	η up(%)	0.2	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	220	η down(%)	99.8	CIBSE SHR MAX	1.35

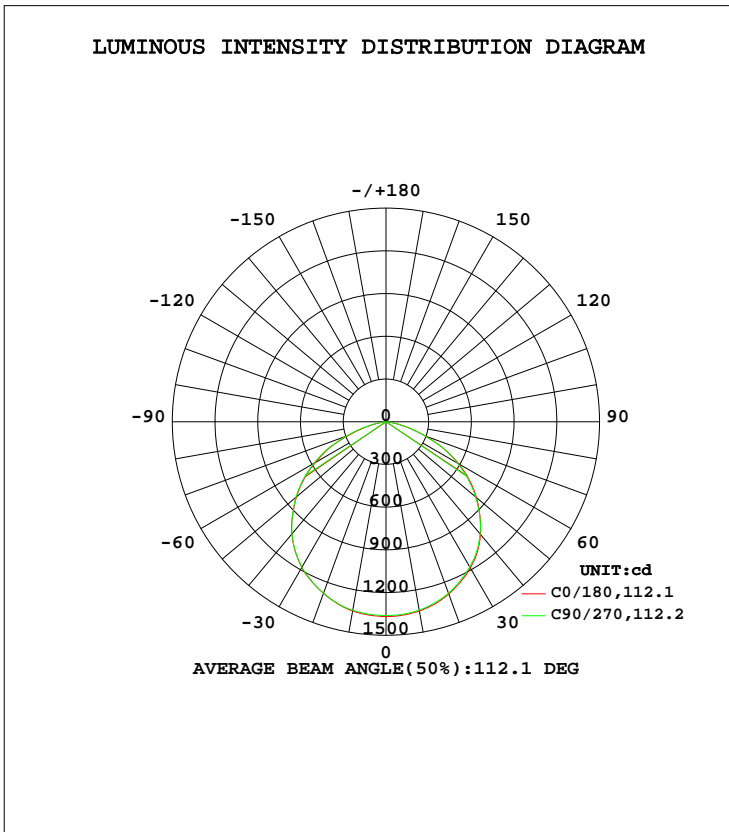

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1349	1349	1343	1339	1349	1344	1345	1342	0- 10	129.2	129.2	3.45,3.45
20	1288	1287	1281	1277	1283	1282	1282	1281	10- 20	372.5	501.7	13.4,13.4
30	1185	1182	1177	1174	1182	1178	1180	1179	20- 30	570.0	1072	28.6,28.6
40	1033	1028	1028	1020	1029	1023	1027	1029	30- 40	694.2	1766	47.1,47.1
50	829.2	824.9	820.3	813.3	820.6	821.5	825.0	827.3	40- 50	715.3	2481	66.2,66.2
60	588.2	589.9	580.6	572.8	573.7	582.0	585.3	595.8	50- 60	631.2	3112	83,83
70	299.9	300.1	291.6	288.3	286.6	293.4	300.6	311.4	60- 70	437.2	3550	94.7,94.7
80	55.76	58.22	56.72	55.36	52.61	60.47	58.60	67.56	70- 80	176.8	3726	99.4,99.4
90	0.2439	0.1294	0.1218	0.1485	0.0884	0.0881	0.4139	1.176	80- 90	17.48	3744	99.8,99.8
100	0.0775	0.1069	0.1151	0.0995	0.2688	0.2682	0.2675	0.2377	90-100	0.1678	3744	99.8,99.8
110	0.0616	0.0907	0.1429	0.1143	0.7424	0.6828	0.7135	0.6852	100-110	0.3042	3744	99.8,99.8
120	0.4734	0.4733	0.4153	0.3836	1.169	1.108	1.189	1.219	110-120	0.5632	3745	99.9,99.9
130	1.009	0.9496	1.039	0.8008	1.424	1.227	1.290	1.307	120-130	0.8482	3746	99.9,99.9
140	1.862	1.632	1.872	1.455	1.633	1.366	1.547	1.544	130-140	1.038	3747	99.9,99.9
150	2.314	2.344	2.376	2.197	2.018	1.840	2.140	2.138	140-150	1.193	3748	99.9,99.9
160	2.569	2.582	2.526	2.494	2.459	2.368	2.586	2.465	150-160	1.087	3749	100,100
170	2.908	2.967	3.090	2.880	2.730	2.732	2.849	2.969	160-170	0.7551	3750	100,100
180	3.175	3.175	3.181	3.088	3.086	3.027	3.210	3.058	170-180	0.2873	3750	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 2127.9 lm

%lum = 56.7%
 %lamp = 56.7%

Conical surface Flux(120deg): 3112.4 lm

%lum = 83.0%
 %lamp = 83.0%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16


γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

LUMINANCE LIMITATION CURVES

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-30W-SW-40	WEIGHT:
SPEC.:30W 4000K	DIM.: L:1267mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

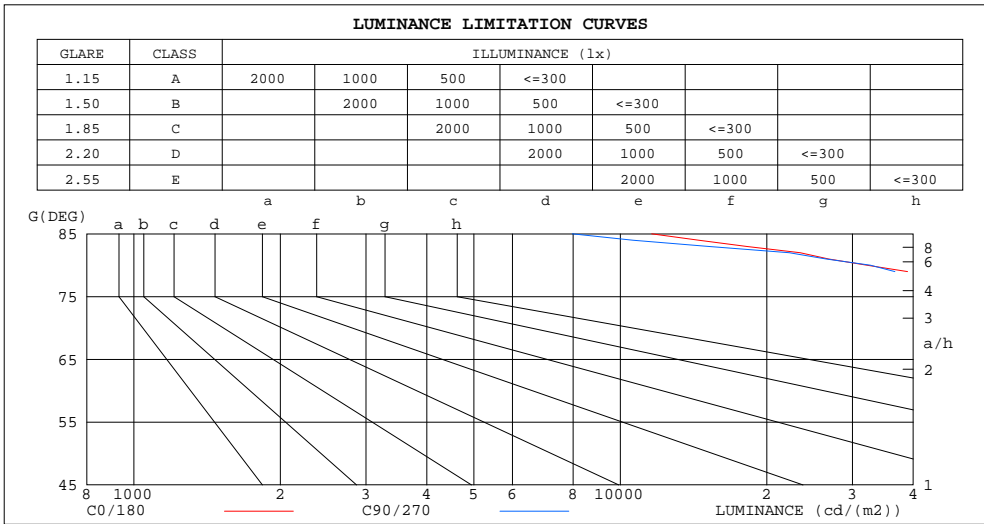

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	11605	7969
80	32113	32663
75	64555	60897
70	87685	85258
65	106366	105989
60	117632	116115
55	124532	122731
50	128998	127620
45	131945	131675

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:


Checker: DENNY

Assessor: JOE

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-30W-SW-40	WEIGHT:
SPEC.:30W 4000K	DIM.: L:1267mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pw																
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.05	1.01	.98	1.03	.99	.96	.99	.96	.93	.95	.92	.90	.91	.89	.88	.86
2.0	.92	.86	.80	.90	.84	.79	.87	.82	.78	.84	.79	.76	.81	.77	.74	.72
3.0	.81	.73	.67	.80	.72	.67	.77	.71	.65	.74	.69	.64	.71	.67	.63	.61
4.0	.72	.64	.57	.71	.63	.57	.68	.61	.56	.66	.60	.55	.64	.59	.54	.52
5.0	.64	.56	.49	.63	.55	.49	.61	.54	.48	.59	.53	.48	.57	.52	.47	.45
6.0	.58	.49	.43	.57	.49	.43	.55	.48	.42	.54	.47	.42	.52	.46	.42	.40
7.0	.53	.44	.38	.52	.44	.38	.50	.43	.37	.49	.42	.37	.47	.41	.37	.35
8.0	.48	.40	.34	.47	.39	.34	.46	.39	.33	.45	.38	.33	.44	.38	.33	.31
9.0	.44	.36	.30	.43	.36	.30	.42	.35	.30	.41	.35	.30	.40	.34	.30	.28
10.0	.41	.33	.28	.40	.33	.27	.39	.32	.27	.38	.32	.27	.37	.31	.27	.25

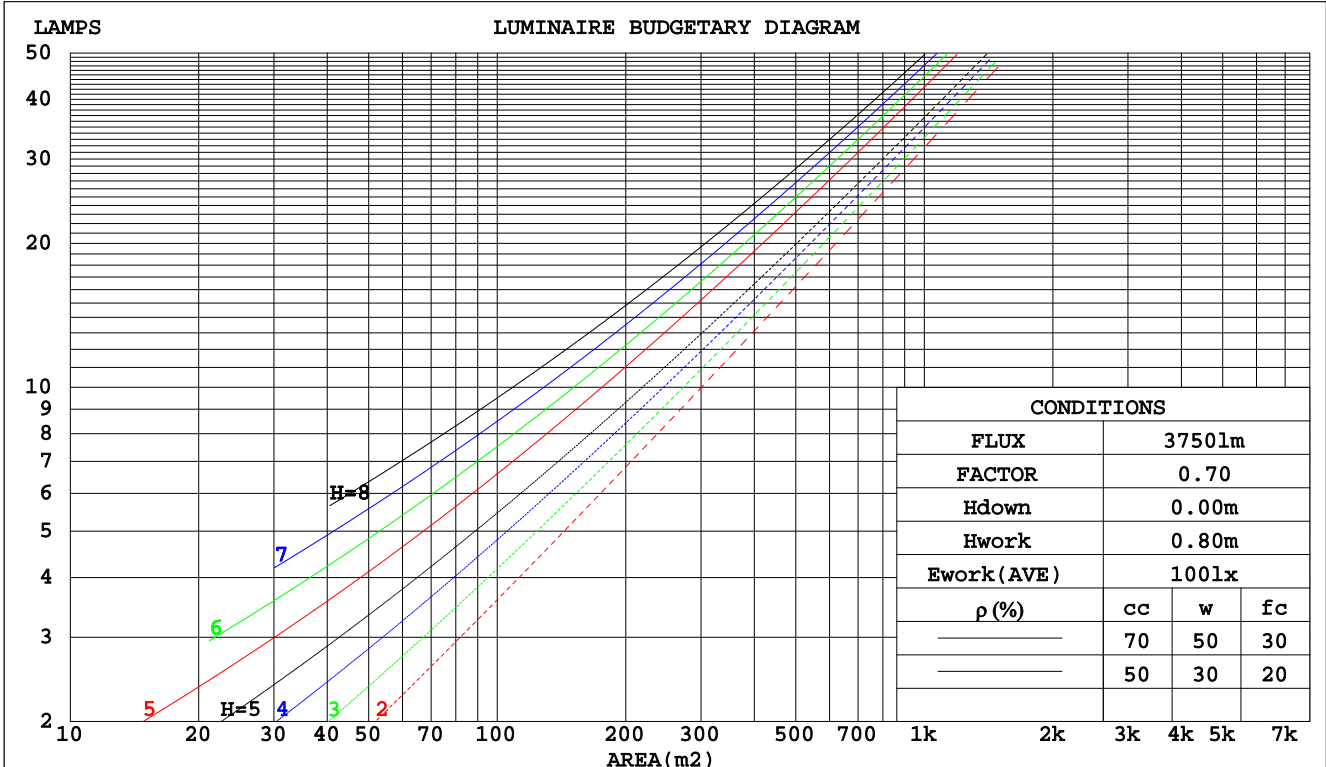

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

WEC AND CCEC

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-30W-SW-40	WEIGHT:
SPEC.:30W 4000K	DIM.: L:1267mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.282	.161	.051	.275	.157	.050	.262	.150	.048	.250	.144	.046	.239	.138	.045	
2.0	.274	.150	.046	.267	.147	.045	.256	.142	.044	.245	.138	.043	.235	.133	.042	
3.0	.257	.137	.041	.252	.135	.041	.242	.131	.040	.232	.127	.039	.223	.124	.038	
4.0	.240	.125	.037	.235	.123	.036	.226	.120	.036	.218	.117	.035	.210	.114	.035	
5.0	.224	.114	.033	.219	.113	.033	.211	.110	.032	.204	.107	.032	.197	.105	.032	
6.0	.208	.105	.030	.205	.103	.030	.197	.101	.029	.191	.099	.029	.184	.097	.029	
7.0	.195	.096	.027	.191	.095	.027	.185	.093	.027	.179	.092	.027	.173	.090	.026	
8.0	.182	.089	.025	.179	.088	.025	.174	.087	.025	.168	.085	.025	.163	.084	.024	
9.0	.171	.083	.023	.169	.082	.023	.163	.081	.023	.159	.079	.023	.154	.078	.023	
10.0	.161	.077	.021	.159	.077	.021	.154	.076	.021	.150	.074	.021	.146	.073	.021	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.180	.158	.138	.154	.135	.119	.105	.093	.082	.061	.054	.048	.019	.017	.015	
2.0	.171	.133	.101	.147	.115	.088	.100	.079	.061	.058	.046	.036	.019	.015	.012	
3.0	.163	.116	.077	.140	.100	.067	.096	.069	.047	.056	.040	.028	.018	.013	.009	
4.0	.156	.102	.061	.134	.088	.053	.092	.061	.037	.053	.036	.022	.017	.012	.007	
5.0	.149	.092	.049	.128	.079	.043	.088	.055	.030	.051	.033	.018	.016	.011	.006	
6.0	.142	.083	.041	.122	.072	.036	.084	.050	.025	.049	.030	.015	.016	.010	.005	
7.0	.135	.076	.035	.116	.066	.031	.080	.046	.022	.047	.027	.013	.015	.009	.004	
8.0	.129	.071	.030	.111	.061	.027	.077	.043	.019	.045	.025	.011	.014	.008	.004	
9.0	.123	.066	.027	.106	.057	.023	.073	.040	.017	.043	.024	.010	.014	.008	.003	
10.0	.117	.061	.024	.101	.053	.021	.070	.037	.015	.041	.022	.009	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

UGR(Unified Glare Rating) Table

NAME: LED TRI-PROOF LIGHT		TYPE:BAWATY-30W-SW-40					WEIGHT:				
SPEC.:30W 4000K		DIM.: L:1267mm					SERIAL No.:				
MFR.: DIMON TECHNOLOGY LTD		SUR.:					Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	Viewed crosswise					Viewed endwise					
x = 2H y = 2H	25.1	26.6	25.4	26.8	27.0	25.1	26.6	25.4	26.8	27.0	
3H	26.2	27.6	26.5	27.8	28.1	26.2	27.6	26.5	27.8	28.0	
4H	26.5	27.8	26.8	28.1	28.3	26.4	27.7	26.8	28.0	28.2	
6H	26.6	27.8	26.9	28.0	28.3	26.5	27.7	26.8	28.0	28.3	
8H	26.5	27.7	26.9	28.0	28.3	26.5	27.6	26.8	27.9	28.2	
12H	26.5	27.6	26.8	27.9	28.2	26.4	27.5	26.8	27.8	28.1	
4H 2H	25.6	26.9	25.9	27.2	27.4	25.6	26.9	25.9	27.2	27.4	
3H	26.9	28.0	27.2	28.3	28.6	26.8	28.0	27.2	28.3	28.6	
4H	27.2	28.3	27.6	28.6	28.9	27.2	28.2	27.5	28.5	28.8	
6H	27.3	28.2	27.7	28.6	29.0	27.3	28.2	27.7	28.5	28.9	
8H	27.3	28.2	27.7	28.5	28.9	27.2	28.1	27.7	28.4	28.8	
12H	27.3	28.0	27.7	28.4	28.8	27.2	28.0	27.6	28.4	28.8	
8H 4H	27.3	28.2	27.7	28.5	28.9	27.3	28.1	27.7	28.5	28.9	
6H	27.5	28.2	27.9	28.6	29.0	27.4	28.1	27.8	28.5	28.9	
8H	27.5	28.1	27.9	28.5	28.9	27.4	28.0	27.9	28.4	28.9	
12H	27.4	28.0	27.9	28.4	28.9	27.4	27.9	27.8	28.3	28.8	
12H 4H	27.3	28.1	27.7	28.4	28.9	27.2	28.0	27.7	28.4	28.8	
6H	27.4	28.1	27.9	28.5	28.9	27.4	28.0	27.8	28.4	28.9	
8H	27.4	28.0	27.9	28.4	28.9	27.4	27.9	27.9	28.3	28.8	
Variations with the observer position at spacings:											
S = 1.0H	+ 0.3 / - 0.3					+ 0.2 / - 0.3					
1.5H	+ 0.2 / - 0.4					+ 0.2 / - 0.4					
2.0H	+ 0.4 / - 0.4					+ 0.4 / - 0.4					

CIE Pub.117, 3750 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 4.6)

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

UTILIZATION FACTORS TABLE

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-30W-SW-40	WEIGHT:
SPEC.:30W 4000K	DIM.: L:1267mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	59	47	40	58	47	40	57	46	40	34
0.80	69	58	50	68	57	50	66	56	50	43
1.00	78	67	60	76	66	60	74	68	59	52
1.25	85	75	68	83	74	68	81	73	67	60
1.50	90	80	74	88	80	73	85	78	72	65
2.00	97	89	83	95	87	82	91	85	80	73
2.50	100	93	87	98	92	87	95	89	85	77
3.00	104	97	92	101	96	91	98	93	89	81
4.00	107	102	98	105	100	97	101	97	94	85
5.00	110	105	102	107	103	100	103	100	97	88
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16


γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

ISOCANDELA DIAGRAM

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-30W-SW-40	WEIGHT:
SPEC.:30W 4000K	DIM.: L:1267mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

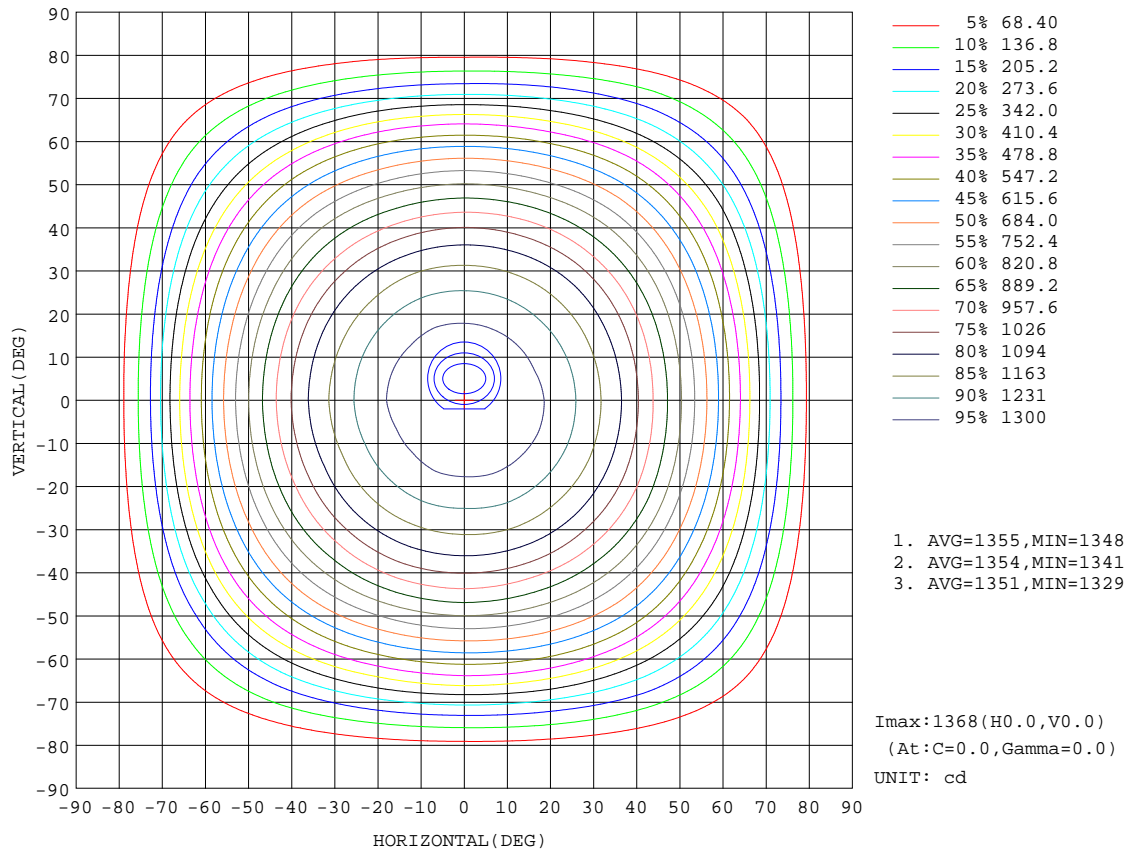

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16


γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

AAI Figure

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-30W-SW-40	WEIGHT:
SPEC.:30W 4000K	DIM.: L:1267mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

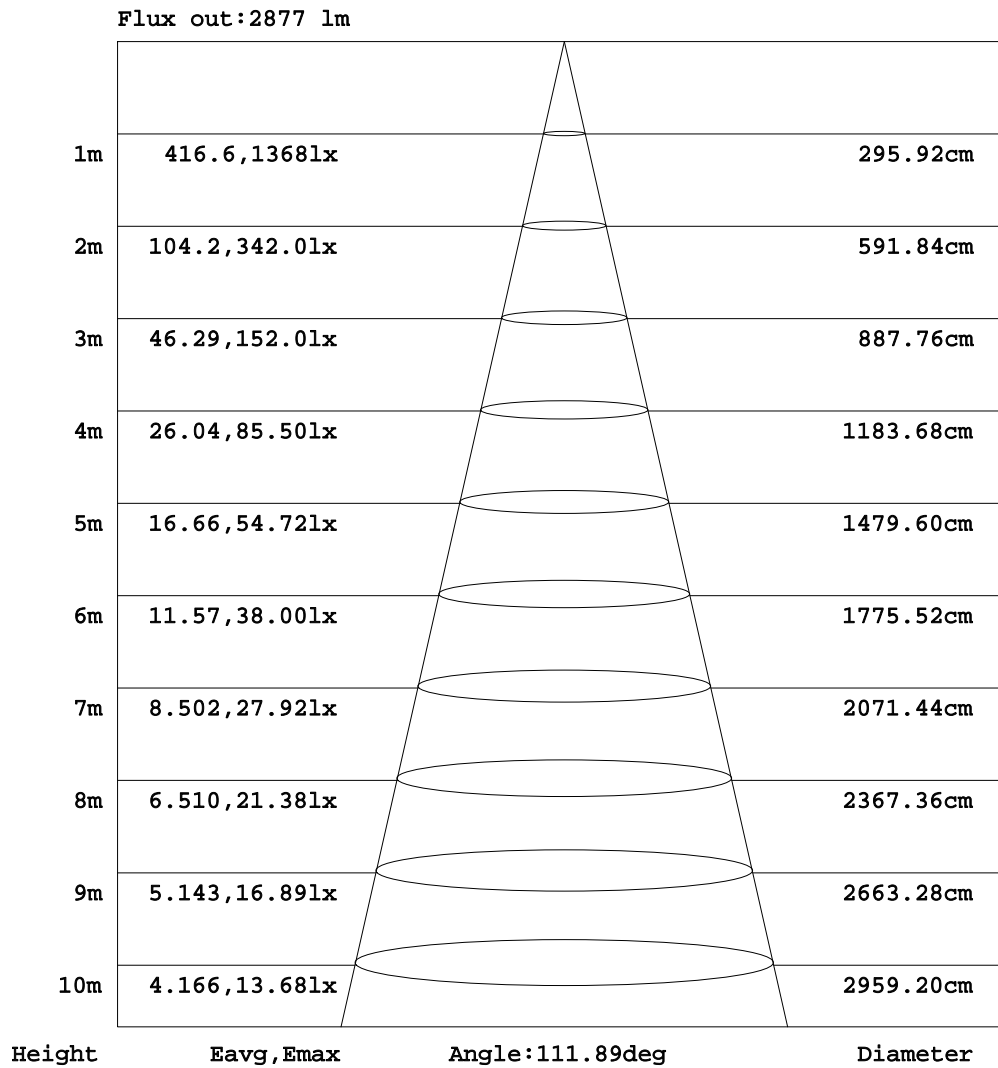

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16


γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

ISOLUX DIAGRAM

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-30W-SW-40	WEIGHT:
SPEC.:30W 4000K	DIM.: L:1267mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

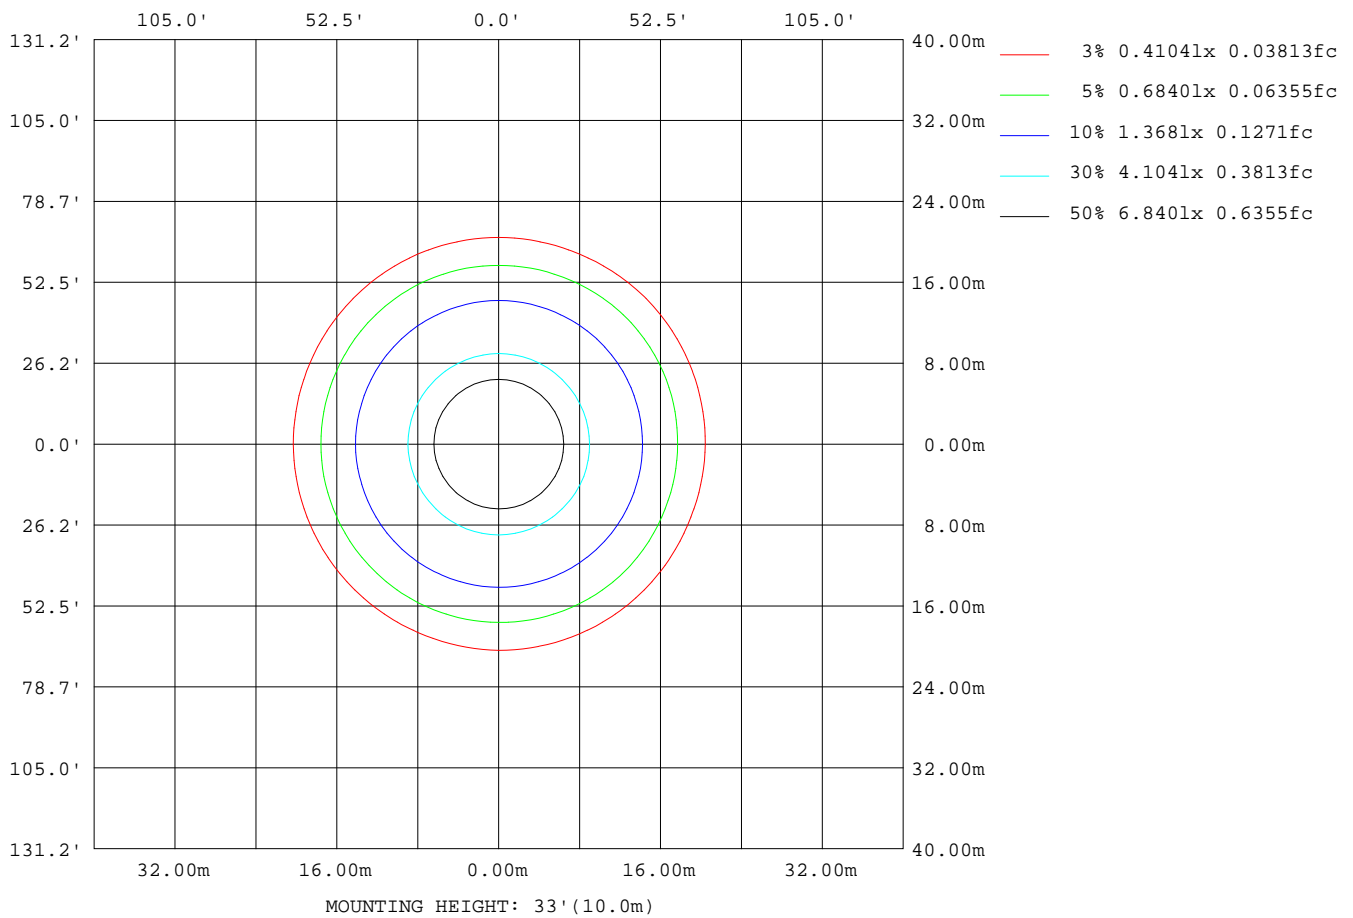


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

Planar Illuminance Curve

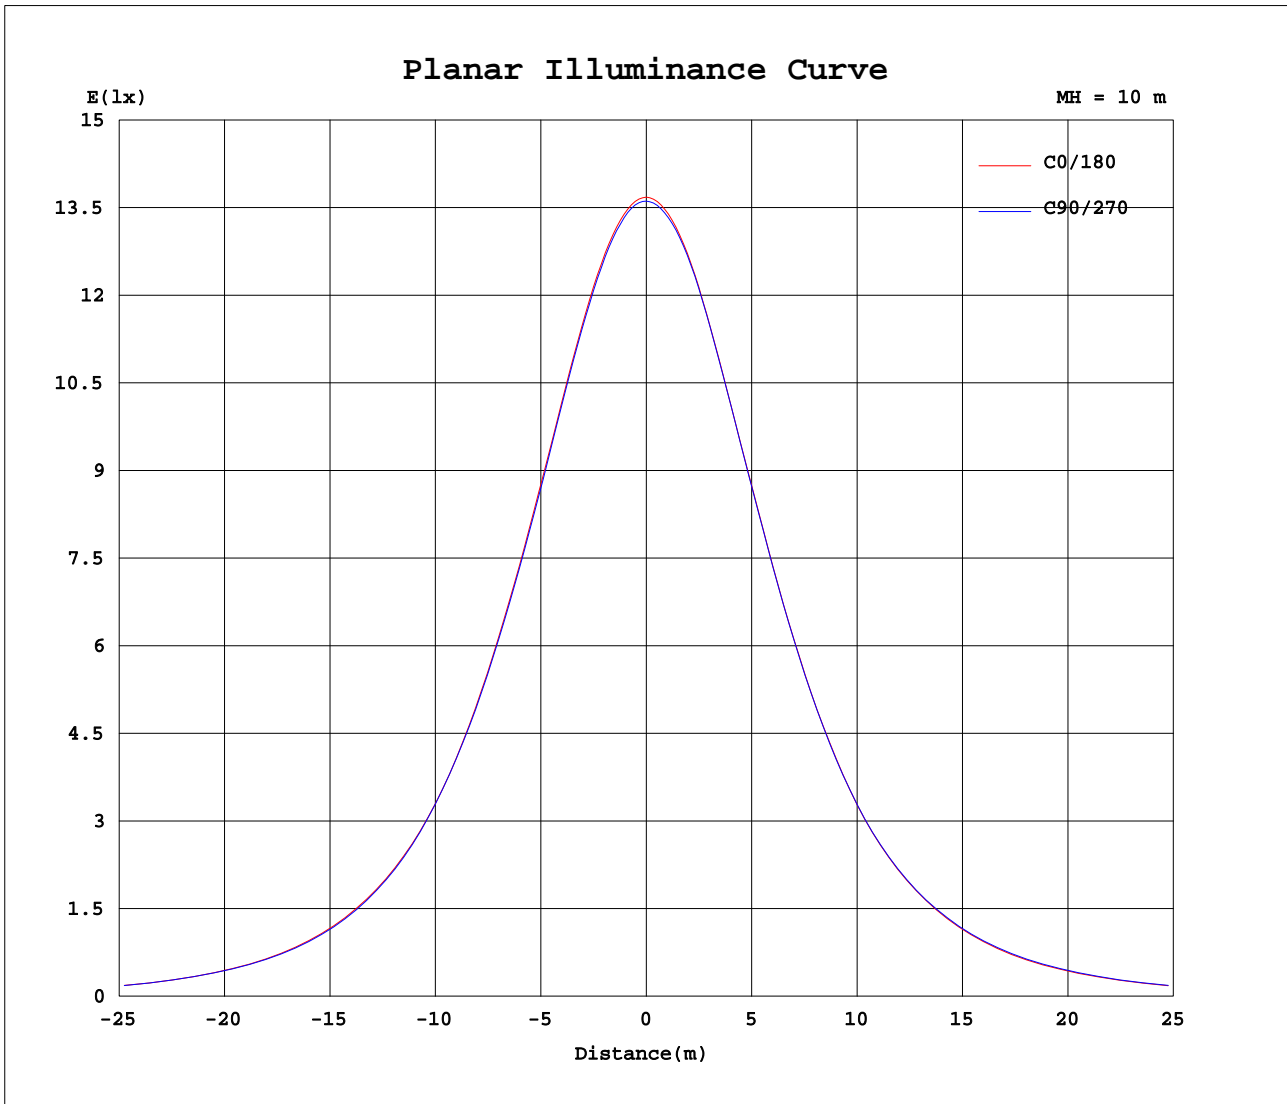

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 24.5DEG
 Operators: William
 Test Date: 2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity: 65.7%
 Test Distance: 26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-30W-SW-40	WEIGHT:
SPEC.:30W 4000K	DIM.: L:1267mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	1368	1366	1364	1363	1361	1360	1359	1358	1368	1366	1364	1363	1361	1360	1359	1358			
5	1363	1361	1361	1360	1357	1356	1354	1354	1363	1360	1359	1358	1357	1355	1355	1354			
10	1349	1349	1349	1347	1343	1342	1339	1341	1349	1347	1344	1345	1345	1343	1342	1341			
15	1325	1324	1323	1321	1317	1318	1314	1316	1322	1321	1319	1322	1320	1318	1318	1317			
20	1288	1289	1287	1285	1281	1282	1277	1275	1283	1283	1282	1285	1282	1281	1281	1282			
25	1240	1241	1239	1238	1232	1234	1232	1232	1237	1237	1237	1238	1235	1235	1234	1237			
30	1185	1185	1182	1183	1177	1176	1174	1173	1182	1178	1178	1181	1180	1180	1179	1182			
35	1118	1116	1114	1114	1111	1109	1105	1102	1112	1111	1109	1108	1110	1110	1112	1114			
40	1033	1034	1028	1027	1028	1027	1020	1020	1029	1027	1023	1023	1027	1026	1029	1030			
45	933	938	929	927	931	927	918	920	927	926	923	923	928	930	929	932			
50	829	830	825	821	820	815	813	815	821	817	822	820	825	823	827	828			
55	714	712	714	709	704	699	700	697	704	701	707	707	712	710	717	715			
60	588	584	590	585	581	575	573	571	574	574	582	586	585	587	596	595			
65	450	442	445	446	448	434	435	437	440	439	441	448	452	449	456	455			
70	300	300	300	297	292	290	288	278	287	292	293	299	301	304	311	312			
75	167	168	167	164	158	157	155	148	151	162	167	166	169	172	181	177			
80	55.8	59.7	58.2	56.4	56.7	53.2	55.4	48.7	52.6	56.9	60.5	63.2	58.6	65.7	67.6	67.1			
85	10.1	9.12	8.63	7.77	6.95	6.78	6.40	6.69	7.18	8.94	9.36	11.5	9.98	10.3	11.0	12.4			
90	0.24	0.21	0.13	0.15	0.12	0.16	0.15	0.12	0.09	1.09	0.09	0.09	0.41	0.03	1.18	0.44			
95	0.09	0.08	0.12	0.12	0.10	0.10	0.09	0.10	0.12	0.35	0.11	0.12	0.09	0.10	0.09	0.12			
100	0.08	0.09	0.11	0.13	0.12	0.12	0.10	0.10	0.27	0.27	0.27	0.27	0.27	0.24	0.24	0.24			
105	0.07	0.10	0.10	0.14	0.13	0.14	0.11	0.11	0.48	0.45	0.45	0.48	0.45	0.48	0.48	0.45			
110	0.06	0.11	0.09	0.15	0.14	0.16	0.11	0.12	0.74	0.65	0.68	0.71	0.71	0.72	0.69	0.68			
115	0.15	0.18	0.18	0.20	0.21	0.15	0.15	0.21	0.98	0.92	0.95	0.95	0.95	0.95	0.95	0.95			
120	0.47	0.39	0.47	0.44	0.42	0.33	0.38	0.36	1.17	1.16	1.11	1.06	1.19	1.16	1.22	1.13			
125	0.71	0.65	0.62	0.77	0.74	0.68	0.59	0.62	1.25	1.25	1.15	1.08	1.24	1.21	1.26	1.25			
130	1.01	0.95	0.95	1.07	1.04	0.95	0.80	0.96	1.42	1.28	1.23	1.16	1.29	1.25	1.31	1.31			
135	1.42	1.22	1.25	1.43	1.40	1.28	1.01	1.19	1.48	1.31	1.28	1.36	1.49	1.34	1.42	1.43			
140	1.86	1.69	1.63	1.93	1.87	1.87	1.45	1.75	1.63	1.48	1.37	1.52	1.55	1.58	1.54	1.55			
145	2.10	2.02	1.96	2.26	2.17	2.11	1.90	1.93	1.78	1.63	1.54	1.78	1.87	1.87	1.72	1.76			
150	2.31	2.34	2.34	2.41	2.38	2.41	2.20	2.11	2.02	1.90	1.84	2.11	2.14	2.14	2.14	2.02			
155	2.46	2.52	2.49	2.53	2.40	2.43	2.44	2.35	2.31	2.23	2.20	2.38	2.29	2.35	2.27	2.35			
160	2.57	2.55	2.58	2.58	2.53	2.53	2.49	2.47	2.46	2.40	2.37	2.50	2.59	2.44	2.46	2.41			
165	2.85	2.76	2.76	2.82	2.85	2.68	2.70	2.71	2.55	2.58	2.52	2.59	2.68	2.62	2.67	2.54			
170	2.91	2.88	2.97	3.06	3.09	2.94	2.88	2.92	2.73	2.76	2.73	2.85	2.85	2.91	2.97	2.76			
175	3.12	3.00	3.18	3.25	3.23	3.06	3.09	3.01	3.03	2.97	2.97	3.09	3.06	3.06	3.06	2.98			
180	3.17	3.03	3.18	3.27	3.18	3.06	3.09	3.01	3.09	3.18	3.03	3.18	3.21	3.21	3.06	3.10			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE