
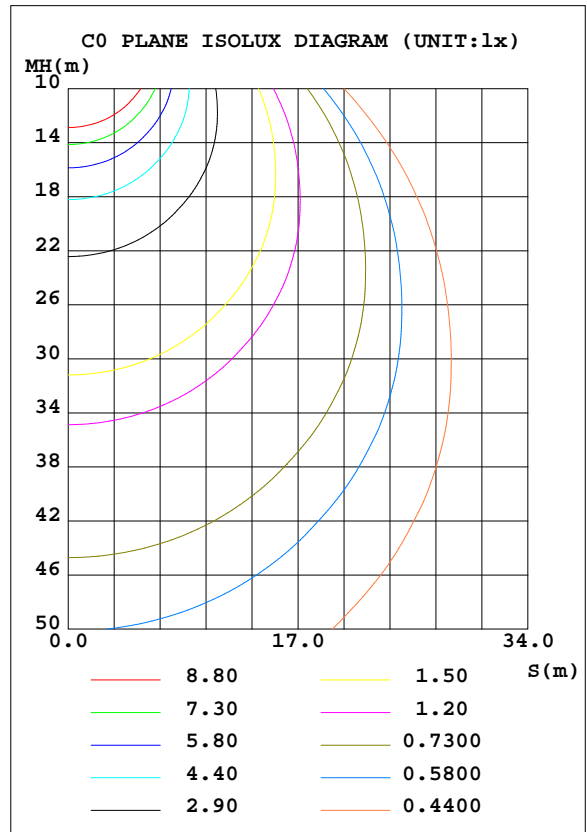


LUMINAIRE PHOTOMETRIC TEST REPORT

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-32W-SW-40	WEIGHT:
SPEC.:32W 4000K	DIM.: L:1267mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 125.00 lm/W			
MODEL	BAWATY-32W-SW-40	Imax(cd)	1459	S/MH(C0/180)	1.28
NOMINAL POWER(W)	32	LOR(%)	100.0	S/MH(C90/270)	1.29
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	4000.1	η UP, DN(C0-180)	0.1,49.8
NOMINAL FLUX(lm)	4000	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.1,50.0
LAMPS INSIDE	1	η up(%)	0.2	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	220	η down(%)	99.8	CIBSE SHR MAX	1.35

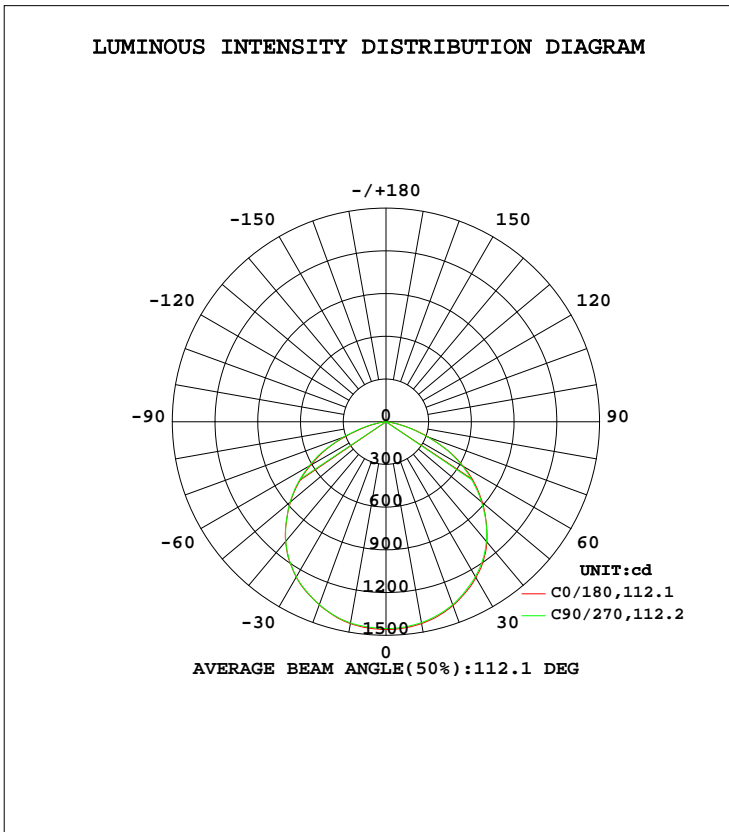

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1439	1439	1433	1429	1439	1434	1434	1431	0- 10	137.8	137.8	3.45,3.45
20	1374	1373	1367	1362	1368	1367	1367	1366	10- 20	397.4	535.2	13.4,13.4
30	1264	1261	1256	1252	1261	1256	1259	1258	20- 30	608.0	1143	28.6,28.6
40	1102	1096	1097	1088	1097	1091	1096	1097	30- 40	740.5	1884	47.1,47.1
50	884.5	879.9	875.0	867.5	875.3	876.3	880.0	882.5	40- 50	763.0	2647	66.2,66.2
60	627.4	629.3	619.3	610.9	612.0	620.8	624.4	635.5	50- 60	673.3	3320	83,83
70	319.9	320.1	311.0	307.5	305.7	313.0	320.7	332.1	60- 70	466.3	3786	94.7,94.7
80	59.48	62.10	60.50	59.05	56.12	64.50	62.51	72.07	70- 80	188.6	3975	99.4,99.4
90	0.2601	0.1380	0.1299	0.1584	0.0943	0.0940	0.4415	1.255	80- 90	18.65	3993	99.8,99.8
100	0.0826	0.1141	0.1227	0.1061	0.2867	0.2861	0.2853	0.2536	90-100	0.1790	3994	99.8,99.8
110	0.0657	0.0967	0.1525	0.1220	0.7919	0.7283	0.7610	0.7309	100-110	0.3245	3994	99.8,99.8
120	0.5049	0.5048	0.4430	0.4092	1.247	1.182	1.268	1.300	110-120	0.6007	3995	99.9,99.9
130	1.076	1.013	1.108	0.8542	1.519	1.309	1.376	1.395	120-130	0.9047	3995	99.9,99.9
140	1.987	1.740	1.997	1.552	1.742	1.457	1.651	1.647	130-140	1.107	3997	99.9,99.9
150	2.469	2.500	2.535	2.343	2.153	1.963	2.283	2.281	140-150	1.273	3998	99.9,99.9
160	2.740	2.754	2.694	2.660	2.623	2.526	2.758	2.629	150-160	1.160	3999	100,100
170	3.101	3.165	3.296	3.072	2.912	2.914	3.039	3.167	160-170	0.8054	4000	100,100
180	3.386	3.387	3.393	3.294	3.291	3.229	3.424	3.262	170-180	0.3065	4000	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 2269.7 lm

%lum = 56.7%
%lamp = 56.7%

Conical surface Flux(120deg): 3319.9 lm

%lum = 83.0%
%lamp = 83.0%

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:24.5DEG
Operators:William
Test Date:2017-12-16


γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
Humidity:65.7%
Test Distance:26.000m [K=1.4470]
Remarks:

Checker: DENNY

Assessor: JOE

LUMINANCE LIMITATION CURVES

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-32W-SW-40	WEIGHT:
SPEC.:32W 4000K	DIM.: L:1267mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

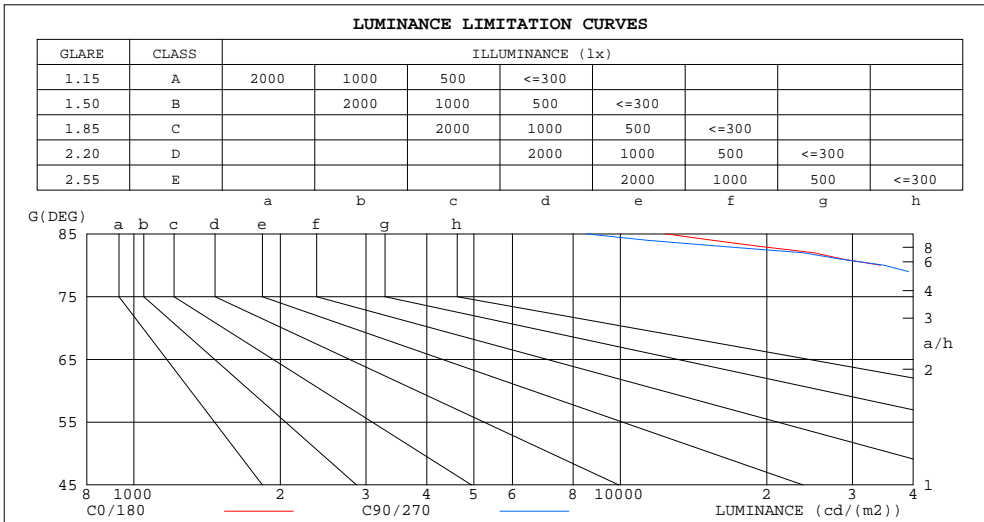

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	12379	8501
80	34254	34840
75	68858	64956
70	93530	90942
65	113457	113055
60	125474	123856
55	132834	130913
50	137598	136128
45	140742	140453

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:


Checker: DENNY

Assessor: JOE

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-32W-SW-40	WEIGHT:
SPEC.:32W 4000K	DIM.: L:1267mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pw																0
pfc																0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.05	1.01	.98	1.03	.99	.96	.99	.96	.93	.95	.92	.90	.91	.89	.88	.86
2.0	.92	.86	.80	.90	.84	.79	.87	.82	.78	.84	.79	.76	.81	.77	.74	.72
3.0	.81	.73	.67	.80	.72	.67	.77	.71	.65	.74	.69	.64	.71	.67	.63	.61
4.0	.72	.64	.57	.71	.63	.57	.68	.61	.56	.66	.60	.55	.64	.59	.54	.52
5.0	.64	.56	.49	.63	.55	.49	.61	.54	.48	.59	.53	.48	.57	.52	.47	.45
6.0	.58	.49	.43	.57	.49	.43	.55	.48	.42	.54	.47	.42	.52	.46	.42	.40
7.0	.53	.44	.38	.52	.44	.38	.50	.43	.37	.49	.42	.37	.47	.41	.37	.35
8.0	.48	.40	.34	.47	.39	.34	.46	.39	.33	.45	.38	.33	.44	.38	.33	.31
9.0	.44	.36	.30	.43	.36	.30	.42	.35	.30	.41	.35	.30	.40	.34	.30	.28
10.0	.41	.33	.28	.40	.33	.27	.39	.32	.27	.38	.32	.27	.37	.31	.27	.25

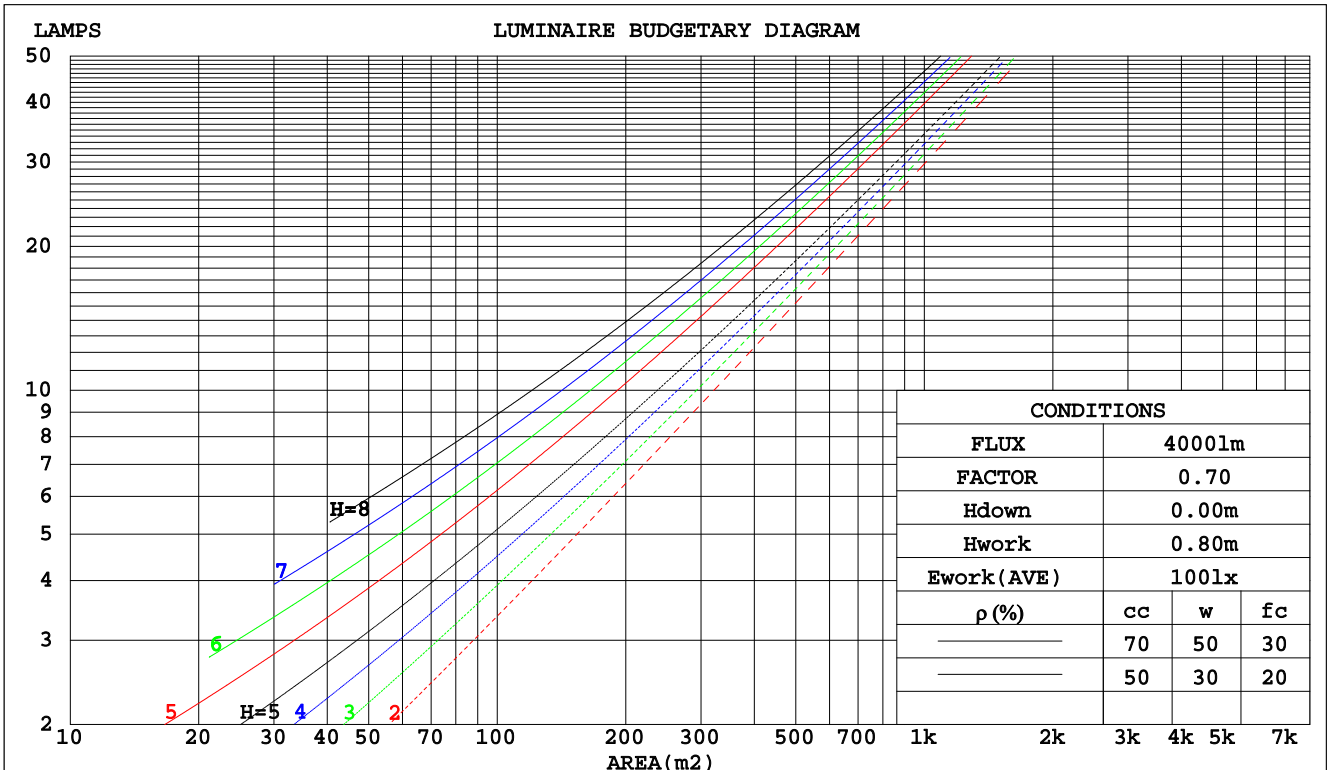

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

WEC AND CCEC

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-32W-SW-40	WEIGHT:
SPEC.:32W 4000K	DIM.: L:1267mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.282	.161	.051	.275	.157	.050	.262	.150	.048	.250	.144	.046	.239	.138	.045	
2.0	.274	.150	.046	.267	.147	.045	.256	.142	.044	.245	.138	.043	.235	.133	.042	
3.0	.257	.137	.041	.252	.135	.041	.242	.131	.040	.232	.127	.039	.223	.124	.038	
4.0	.240	.125	.037	.235	.123	.036	.226	.120	.036	.218	.117	.035	.210	.114	.035	
5.0	.224	.114	.033	.219	.113	.033	.211	.110	.032	.204	.107	.032	.197	.105	.032	
6.0	.208	.105	.030	.205	.103	.030	.197	.101	.029	.191	.099	.029	.184	.097	.029	
7.0	.195	.096	.027	.191	.095	.027	.185	.093	.027	.179	.092	.027	.173	.090	.026	
8.0	.182	.089	.025	.179	.088	.025	.174	.087	.025	.168	.085	.025	.163	.084	.024	
9.0	.171	.083	.023	.169	.082	.023	.163	.081	.023	.159	.079	.023	.154	.078	.023	
10.0	.161	.077	.021	.159	.077	.021	.154	.076	.021	.150	.074	.021	.146	.073	.021	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.180	.158	.138	.154	.135	.119	.105	.093	.082	.061	.054	.048	.019	.017	.015	
2.0	.171	.133	.101	.147	.115	.088	.100	.079	.061	.058	.046	.036	.019	.015	.012	
3.0	.163	.116	.077	.140	.100	.067	.096	.069	.047	.056	.040	.028	.018	.013	.009	
4.0	.156	.102	.061	.134	.088	.053	.092	.061	.037	.053	.036	.022	.017	.012	.007	
5.0	.149	.092	.049	.128	.079	.043	.088	.055	.030	.051	.033	.018	.016	.011	.006	
6.0	.142	.083	.041	.122	.072	.036	.084	.050	.025	.049	.030	.015	.016	.010	.005	
7.0	.135	.076	.035	.116	.066	.031	.080	.046	.022	.047	.027	.013	.015	.009	.004	
8.0	.129	.071	.030	.111	.061	.027	.077	.043	.019	.045	.025	.011	.014	.008	.004	
9.0	.123	.066	.027	.106	.057	.023	.073	.040	.017	.043	.024	.010	.014	.008	.003	
10.0	.117	.061	.024	.101	.053	.021	.070	.037	.015	.041	.022	.009	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

UGR(Unified Glare Rating) Table

NAME: LED TRI-PROOF LIGHT		TYPE:BAWATY-32W-SW-40				WEIGHT:				
SPEC.:32W 4000K		DIM.: L:1267mm				SERIAL No.:				
MFR.: DIMON TECHNOLOGY LTD		SUR.:				Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	25.1	26.6	25.4	26.8	27.0	25.1	26.6	25.4	26.8	27.0
3H	26.2	27.6	26.5	27.8	28.1	26.2	27.6	26.5	27.8	28.0
4H	26.5	27.8	26.8	28.1	28.3	26.4	27.7	26.8	28.0	28.2
6H	26.6	27.8	26.9	28.0	28.3	26.5	27.7	26.8	28.0	28.3
8H	26.5	27.7	26.9	28.0	28.3	26.5	27.6	26.8	27.9	28.2
12H	26.5	27.6	26.8	27.9	28.2	26.4	27.5	26.8	27.8	28.1
4H 2H	25.6	26.9	25.9	27.2	27.4	25.6	26.9	25.9	27.2	27.4
3H	26.9	28.0	27.2	28.3	28.6	26.8	28.0	27.2	28.3	28.6
4H	27.2	28.3	27.6	28.6	28.9	27.2	28.2	27.5	28.5	28.8
6H	27.3	28.2	27.7	28.6	29.0	27.3	28.2	27.7	28.5	28.9
8H	27.3	28.2	27.7	28.5	28.9	27.2	28.1	27.7	28.4	28.8
12H	27.3	28.0	27.7	28.4	28.8	27.2	28.0	27.6	28.4	28.8
8H 4H	27.3	28.2	27.7	28.5	28.9	27.3	28.1	27.7	28.5	28.9
6H	27.5	28.2	27.9	28.6	29.0	27.4	28.1	27.8	28.5	28.9
8H	27.5	28.1	27.9	28.5	28.9	27.4	28.0	27.9	28.4	28.9
12H	27.4	28.0	27.9	28.4	28.9	27.4	27.9	27.8	28.3	28.8
12H 4H	27.3	28.1	27.7	28.4	28.9	27.2	28.0	27.7	28.4	28.8
6H	27.4	28.1	27.9	28.5	28.9	27.4	28.0	27.8	28.4	28.9
8H	27.4	28.0	27.9	28.4	28.9	27.4	27.9	27.9	28.3	28.8
Variations with the observer position at spacings:										
S = 1.0H	+ 0.3 / - 0.3					+ 0.2 / - 0.3				
1.5H	+ 0.2 / - 0.4					+ 0.2 / - 0.4				
2.0H	+ 0.4 / - 0.4					+ 0.4 / - 0.4				

CIE Pub.117, 4000 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 4.8)

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

UTILIZATION FACTORS TABLE

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-32W-SW-40	WEIGHT:
SPEC.:32W 4000K	DIM.: L:1267mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	59	47	40	58	47	40	57	46	40	34
0.80	69	58	50	68	57	50	66	56	50	43
1.00	78	67	60	76	66	60	74	68	59	52
1.25	85	75	68	83	74	68	81	73	67	60
1.50	90	80	74	88	80	73	85	78	72	65
2.00	97	89	83	95	87	82	91	85	80	73
2.50	100	93	87	98	92	87	95	89	85	77
3.00	104	97	92	101	96	91	98	93	89	81
4.00	107	102	98	105	100	97	101	97	94	85
5.00	110	105	102	107	103	100	103	100	97	88
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16


γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

ISOCANDELA DIAGRAM

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-32W-SW-40	WEIGHT:
SPEC.:32W 4000K	DIM.: L:1267mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

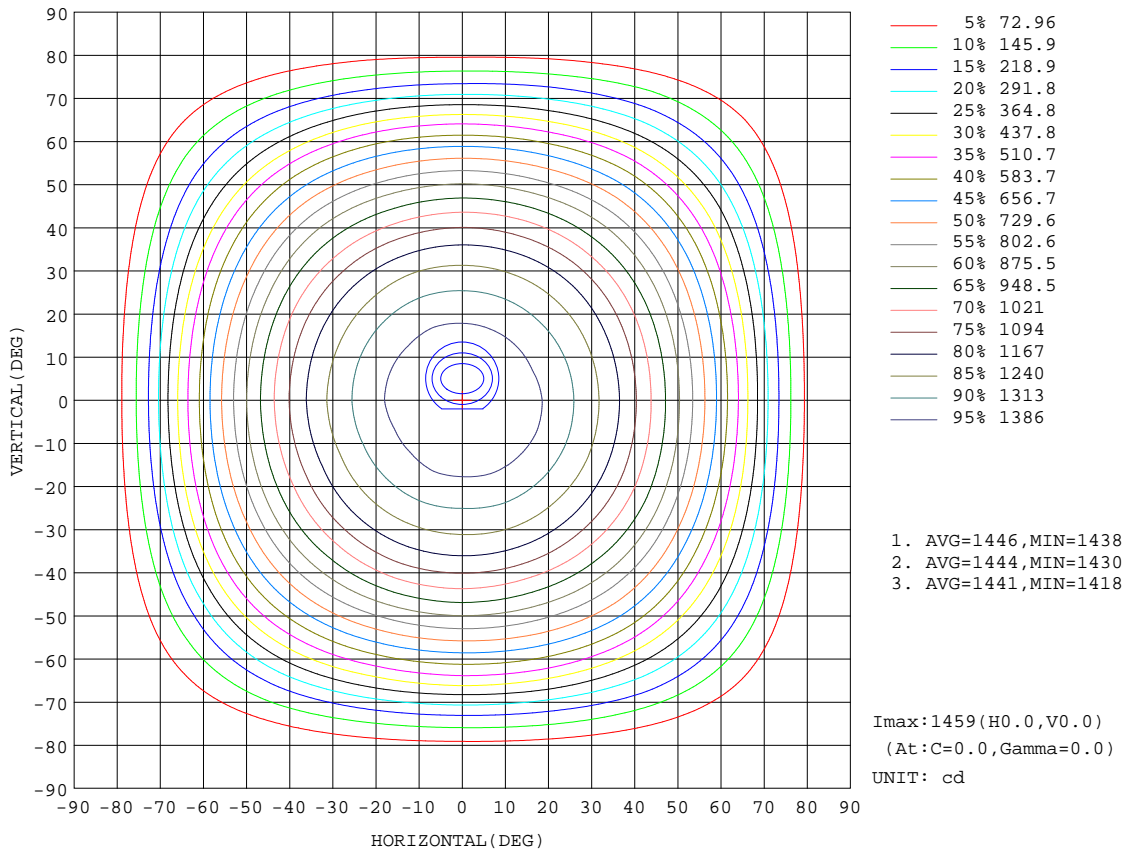

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16


γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

AAI Figure

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-32W-SW-40	WEIGHT:
SPEC.:32W 4000K	DIM.: L:1267mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

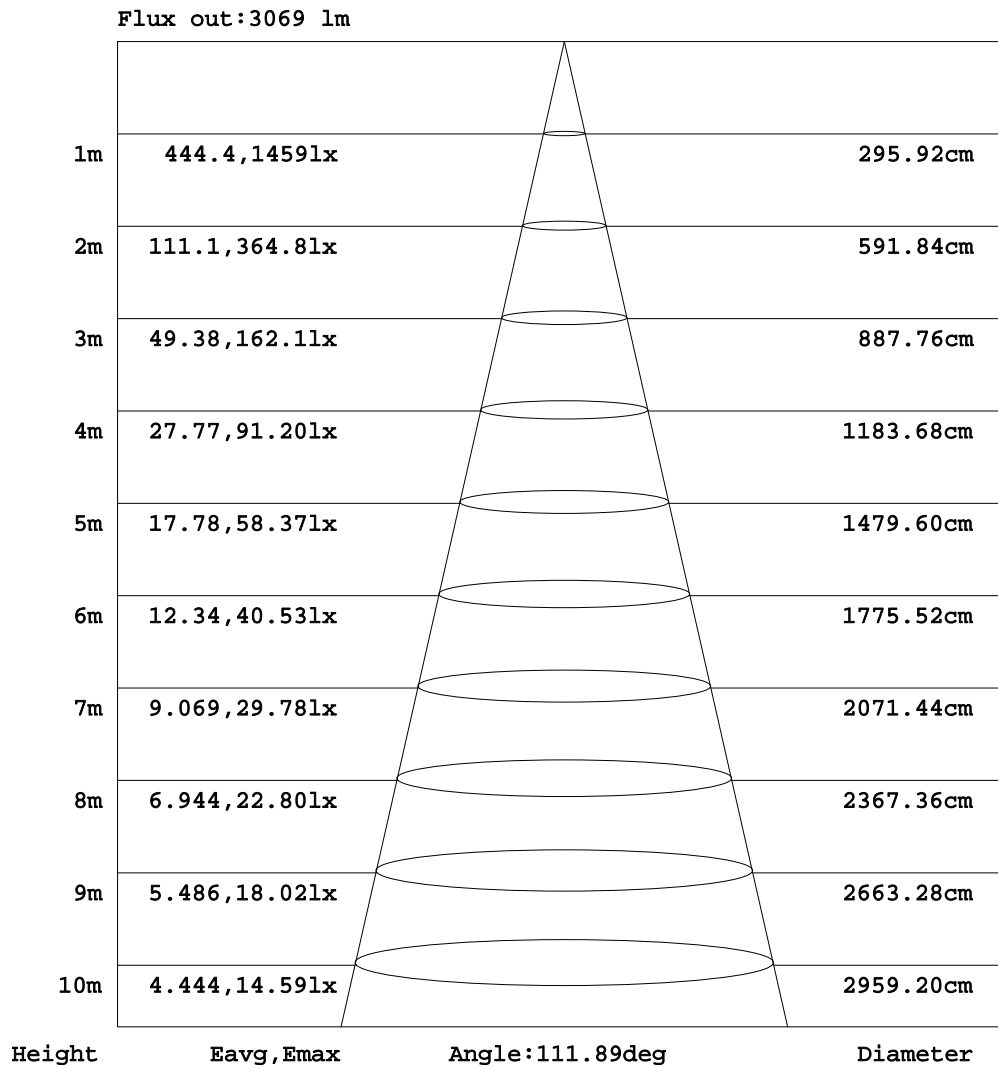

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16


γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

ISOLUX DIAGRAM

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-32W-SW-40	WEIGHT:
SPEC.:32W 4000K	DIM.: L:1267mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

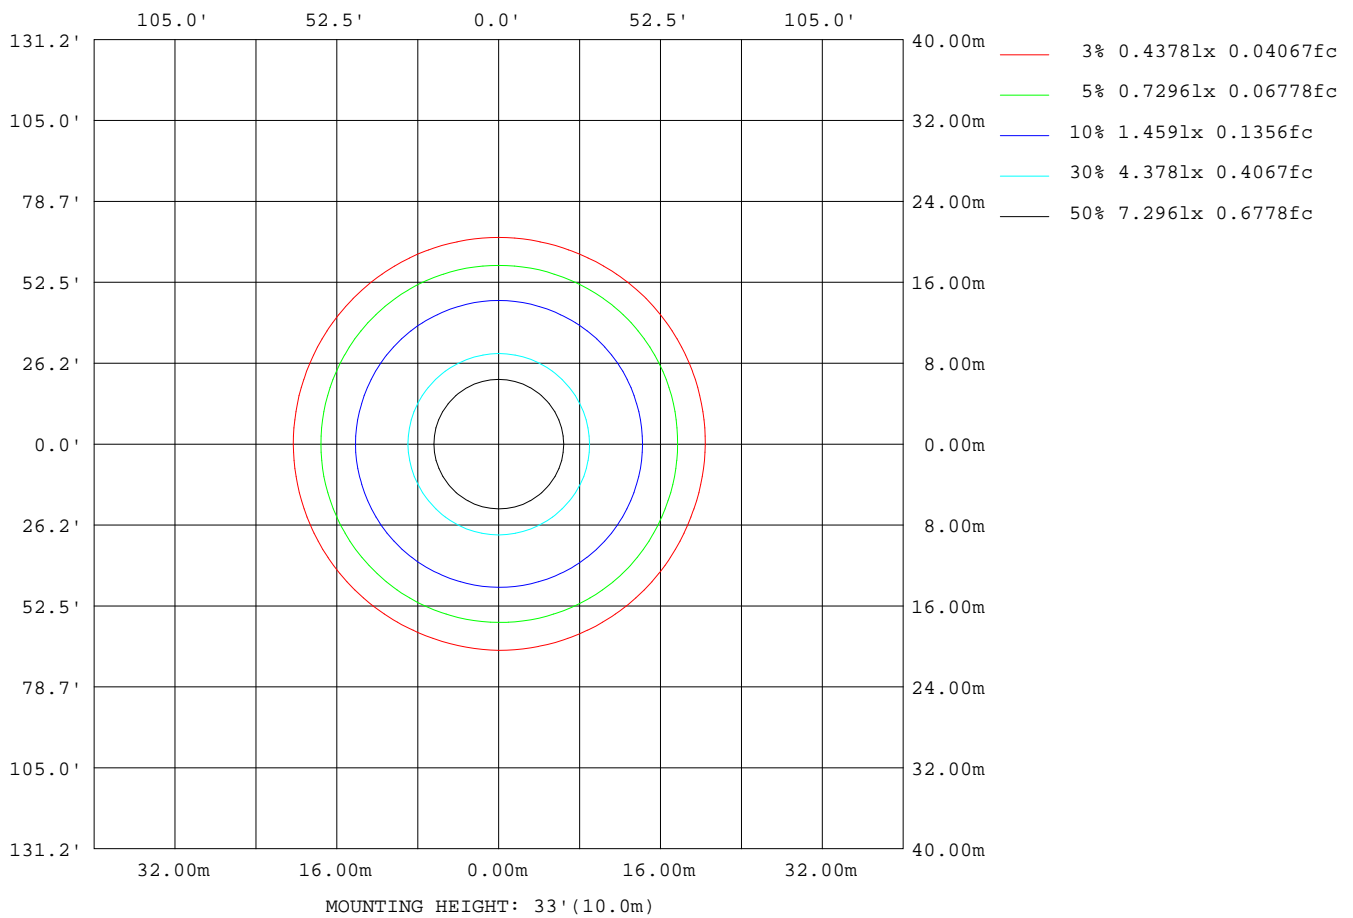


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

Planar Illuminance Curve

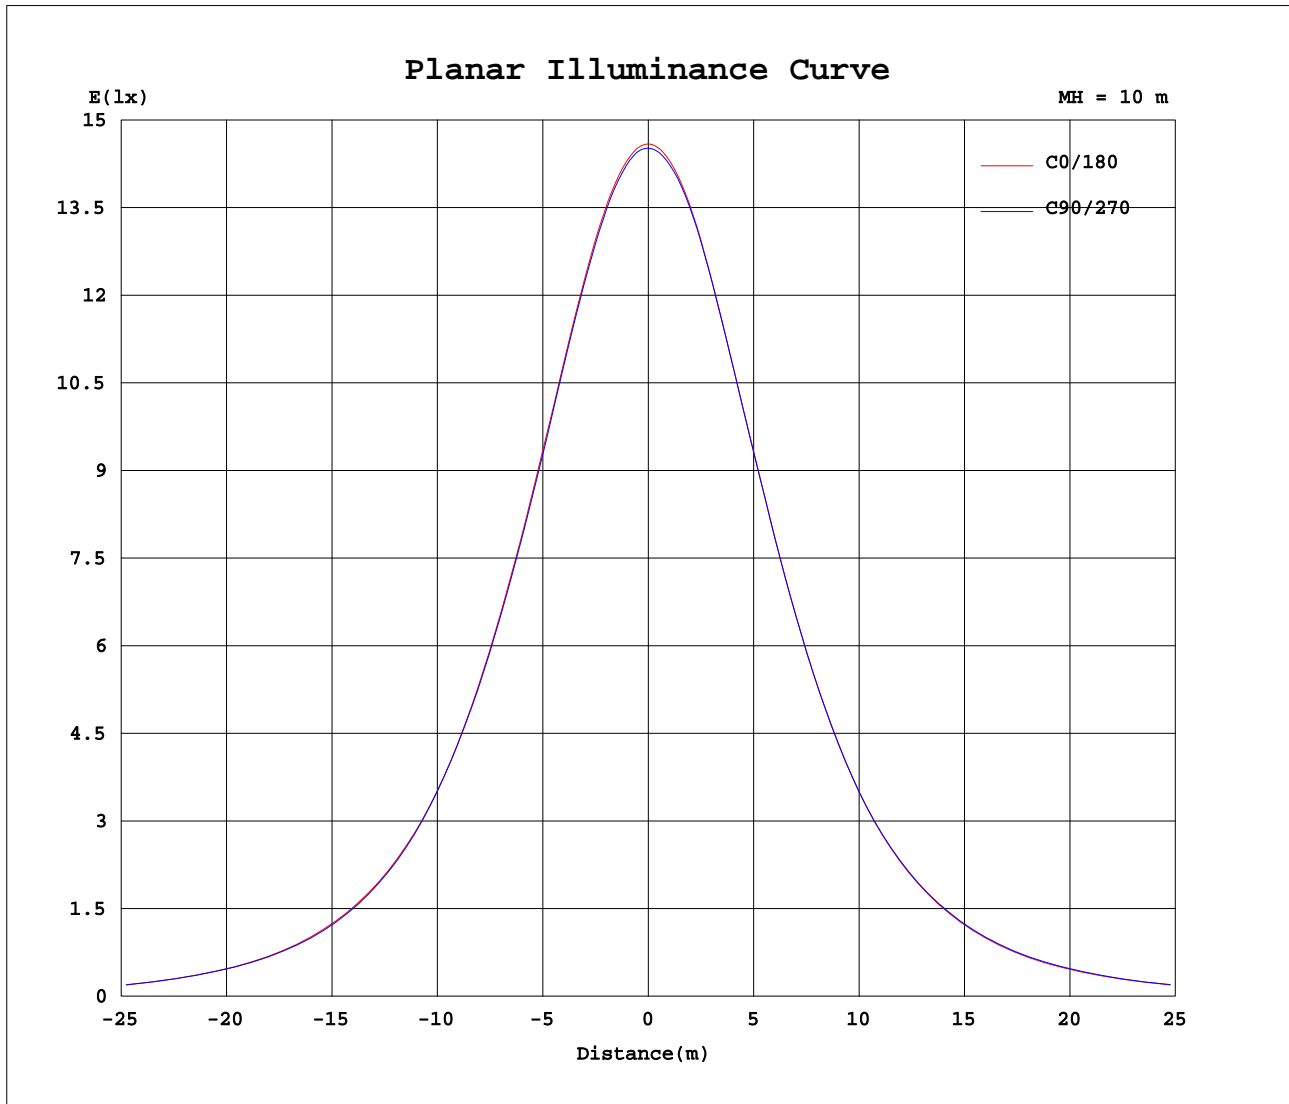

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 24.5DEG
 Operators: William
 Test Date: 2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity: 65.7%
 Test Distance: 26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-32W-SW-40	WEIGHT:
SPEC.:32W 4000K	DIM.: L:1267mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	1459	1457	1455	1454	1452	1451	1450	1449	1459	1457	1455	1454	1452	1451	1450	1449			
5	1454	1452	1452	1450	1448	1447	1445	1444	1454	1451	1450	1449	1447	1446	1445	1444			
10	1439	1439	1439	1437	1433	1432	1429	1430	1439	1436	1434	1435	1434	1432	1431	1431			
15	1413	1413	1411	1409	1405	1406	1402	1403	1410	1409	1406	1410	1408	1406	1405	1405			
20	1374	1375	1373	1371	1367	1368	1362	1360	1368	1368	1367	1370	1367	1366	1366	1368			
25	1323	1324	1322	1320	1314	1316	1314	1314	1319	1319	1319	1320	1317	1317	1316	1319			
30	1264	1264	1261	1262	1256	1255	1252	1251	1261	1257	1256	1260	1259	1258	1258	1260			
35	1192	1190	1188	1188	1185	1182	1179	1176	1186	1185	1182	1182	1184	1184	1187	1188			
40	1102	1103	1096	1096	1097	1095	1088	1087	1097	1095	1091	1091	1096	1095	1097	1099			
45	995	1000	991	988	993	989	980	981	989	988	985	984	990	992	991	994			
50	884	885	880	875	875	869	867	869	875	871	876	875	880	877	882	884			
55	762	759	762	756	751	746	747	743	751	747	754	755	759	757	765	763			
60	627	622	629	624	619	613	611	610	612	613	621	625	624	626	636	635			
65	479	472	474	476	478	463	464	466	470	468	471	478	482	479	487	486			
70	320	321	320	317	311	310	307	296	306	311	313	319	321	324	332	333			
75	178	180	178	175	168	167	166	158	161	173	178	177	180	183	193	189			
80	59.5	63.7	62.1	60.2	60.5	56.8	59.1	52.0	56.1	60.7	64.5	67.5	62.5	70.1	72.1	71.6			
85	10.8	9.72	9.20	8.29	7.41	7.24	6.82	7.13	7.66	9.54	9.99	12.3	10.6	11.0	11.7	13.2			
90	0.26	0.23	0.14	0.16	0.13	0.17	0.16	0.13	0.09	1.16	0.09	0.09	0.44	0.03	1.25	0.47			
95	0.09	0.09	0.12	0.13	0.11	0.11	0.10	0.10	0.13	0.37	0.11	0.13	0.10	0.11	0.10	0.13			
100	0.08	0.09	0.11	0.14	0.12	0.13	0.11	0.11	0.29	0.29	0.29	0.29	0.29	0.25	0.25	0.25			
105	0.07	0.10	0.11	0.15	0.14	0.15	0.11	0.12	0.51	0.48	0.47	0.51	0.48	0.51	0.51	0.48			
110	0.07	0.12	0.10	0.15	0.15	0.17	0.12	0.12	0.79	0.70	0.73	0.76	0.76	0.76	0.73	0.73			
115	0.16	0.20	0.19	0.21	0.22	0.16	0.16	0.22	1.05	0.98	1.01	1.02	1.02	1.01	1.01	1.02			
120	0.50	0.41	0.50	0.47	0.44	0.35	0.41	0.38	1.25	1.24	1.18	1.13	1.27	1.24	1.30	1.21			
125	0.76	0.70	0.66	0.82	0.79	0.73	0.63	0.66	1.33	1.33	1.22	1.15	1.32	1.29	1.34	1.33			
130	1.08	1.01	1.01	1.14	1.11	1.01	0.85	1.03	1.52	1.36	1.31	1.24	1.38	1.33	1.39	1.40			
135	1.52	1.30	1.33	1.52	1.49	1.36	1.08	1.27	1.58	1.39	1.36	1.45	1.59	1.43	1.51	1.52			
140	1.99	1.80	1.74	2.06	2.00	2.00	1.55	1.87	1.74	1.58	1.46	1.62	1.65	1.68	1.65	1.65			
145	2.24	2.15	2.09	2.41	2.31	2.25	2.03	2.06	1.90	1.74	1.65	1.90	2.00	2.00	1.84	1.87			
150	2.47	2.50	2.50	2.57	2.53	2.57	2.34	2.25	2.15	2.03	1.96	2.25	2.28	2.28	2.28	2.16			
155	2.63	2.69	2.65	2.70	2.55	2.59	2.60	2.51	2.47	2.37	2.34	2.54	2.44	2.51	2.42	2.51			
160	2.74	2.72	2.75	2.75	2.69	2.70	2.66	2.64	2.62	2.57	2.53	2.66	2.76	2.60	2.63	2.57			
165	3.04	2.94	2.94	3.01	3.04	2.85	2.88	2.89	2.72	2.76	2.69	2.76	2.85	2.79	2.85	2.71			
170	3.10	3.08	3.16	3.27	3.30	3.14	3.07	3.11	2.91	2.95	2.91	3.04	3.04	3.11	3.17	2.94			
175	3.32	3.20	3.39	3.46	3.44	3.27	3.29	3.21	3.23	3.17	3.17	3.30	3.27	3.27	3.26	3.18			
180	3.39	3.23	3.39	3.49	3.39	3.27	3.29	3.21	3.29	3.39	3.23	3.39	3.42	3.43	3.26	3.30			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE