
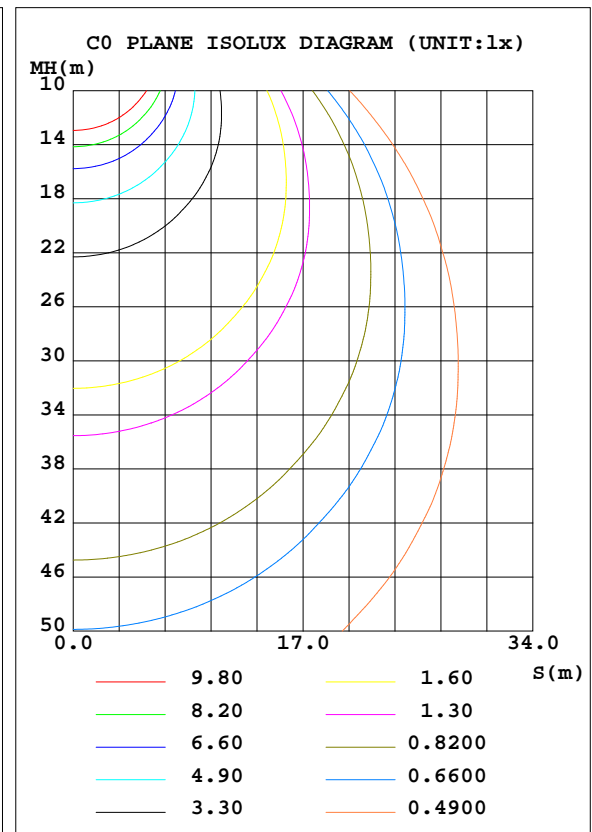


LUMINAIRE PHOTOMETRIC TEST REPORT

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-36W-SW-40	WEIGHT:
SPEC.:36W 4000K	DIM.: L:1567mm	SERIAL No.:DMTIES1362
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 125.00 lm/W			
MODEL	BAWATY-36W-SW-40	Imax(cd)	1642	S/MH(C0/180)	1.28
NOMINAL POWER(W)	36	LOR(%)	100.0	S/MH(C90/270)	1.29
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	4500.1	$\eta$ UP, DN(C0-180)	0.1,49.8
NOMINAL FLUX(lm)	4500	CIE CLASS	DIRECT	$\eta$ UP, DN(C180-360)	0.1,50.0
LAMPS INSIDE	1	$\eta$ up(%)	0.2	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	220	$\eta$ down(%)	99.8	CIBSE SHR MAX	1.35

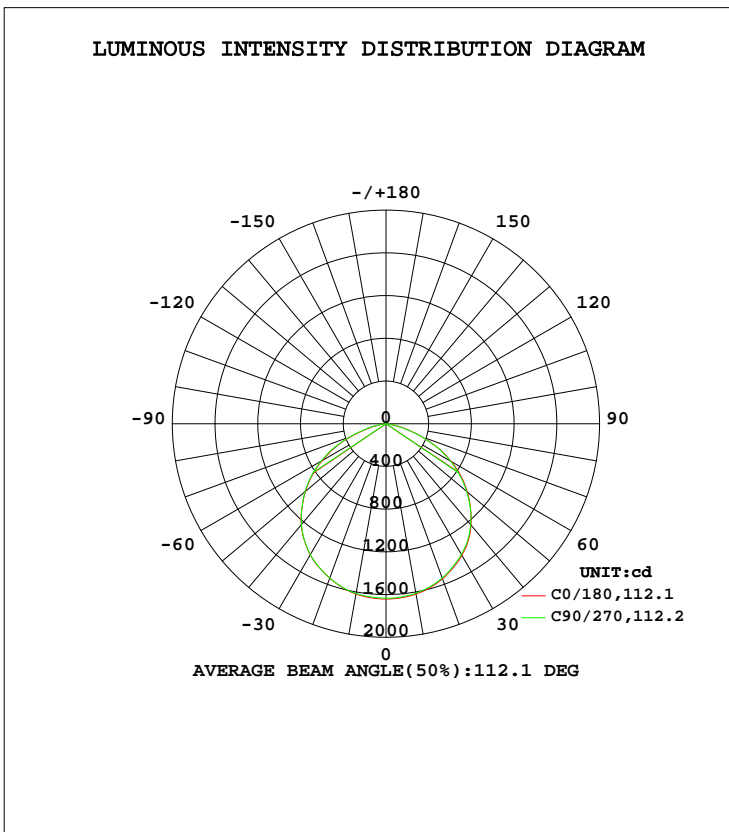

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:24.5DEG  
 Operators:William  
 Test Date:2017-12-16

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.352  
 Humidity:65.7%  
 Test Distance:26.000m [K=1.4470]  
 Remarks:

Checker: DENNY

Assessor: JOE

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1619	1619	1612	1607	1619	1613	1614	1610	0- 10	155.1	155.1	3.45,3.45
20	1546	1544	1538	1532	1539	1538	1538	1537	10- 20	447.0	602.1	13.4,13.4
30	1422	1418	1413	1409	1418	1413	1416	1415	20- 30	683.9	1286	28.6,28.6
40	1239	1233	1234	1223	1235	1227	1233	1234	30- 40	833.0	2119	47.1,47.1
50	995.0	989.9	984.4	975.9	984.7	985.8	990.0	992.8	40- 50	858.3	2977	66.2,66.2
60	705.8	707.9	696.7	687.3	688.5	698.4	702.4	714.9	50- 60	757.5	3735	83,83
70	359.9	360.1	349.9	345.9	343.9	352.1	360.7	373.7	60- 70	524.6	4259	94.7,94.7
80	66.92	69.86	68.06	66.43	63.14	72.57	70.32	81.08	70- 80	212.1	4472	99.4,99.4
90	0.2926	0.1552	0.1461	0.1782	0.1060	0.1058	0.4967	1.412	80- 90	20.98	4493	99.8,99.8
100	0.0930	0.1283	0.1381	0.1194	0.3225	0.3218	0.3210	0.2852	90-100	0.2014	4493	99.8,99.8
110	0.0739	0.1088	0.1715	0.1372	0.8909	0.8194	0.8561	0.8222	100-110	0.3650	4493	99.8,99.8
120	0.5681	0.5679	0.4983	0.4603	1.403	1.330	1.427	1.463	110-120	0.6758	4494	99.9,99.9
130	1.210	1.140	1.247	0.9610	1.709	1.472	1.548	1.569	120-130	1.018	4495	99.9,99.9
140	2.235	1.958	2.247	1.746	1.959	1.639	1.857	1.853	130-140	1.246	4496	99.9,99.9
150	2.777	2.813	2.852	2.636	2.422	2.208	2.568	2.566	140-150	1.432	4498	99.9,99.9
160	3.083	3.098	3.031	2.993	2.951	2.842	3.103	2.958	150-160	1.305	4499	100,100
170	3.489	3.560	3.708	3.456	3.276	3.278	3.419	3.563	160-170	0.9061	4500	100,100
180	3.810	3.810	3.817	3.706	3.703	3.632	3.852	3.670	170-180	0.3448	4500	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 2553.5 lm

%lum = 56.7%  
 %lamp = 56.7%

Conical surface Flux(120deg): 3734.9 lm

%lum = 83.0%  
 %lamp = 83.0%

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:24.5DEG  
 Operators:William  
 Test Date:2017-12-16


γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.352  
 Humidity:65.7%  
 Test Distance:26.000m [K=1.4470]  
 Remarks:

Checker: DENNY

Assessor: JOE

LUMINANCE LIMITATION CURVES

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-36W-SW-40	WEIGHT:
SPEC.:36W 4000K	DIM.: L:1567mm	SERIAL No.:DMTIES1362
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

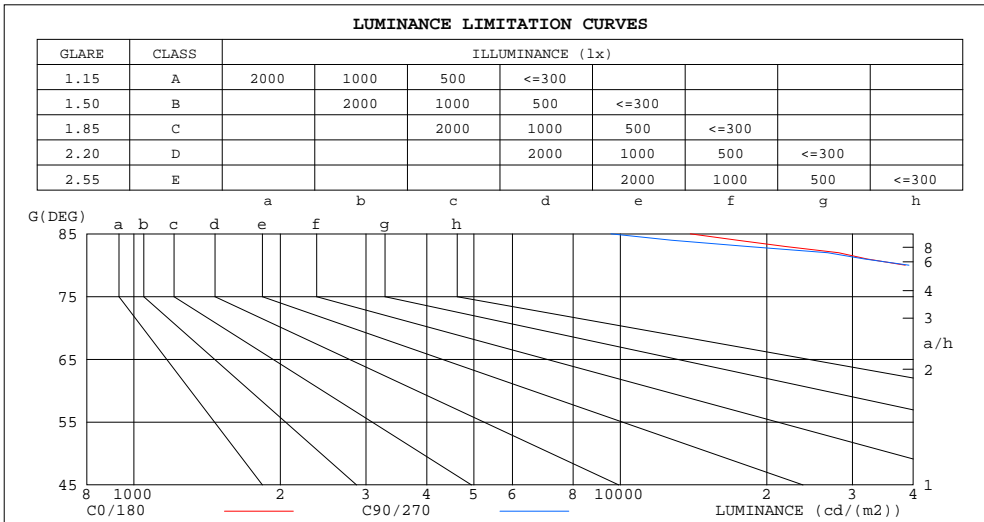

LUMINANCE cd/(m2)		
G( DEG)	C0/180	C90/270
85	13926	9563
80	38536	39195
75	77466	73076
70	105222	102310
65	127639	127187
60	141158	139338
55	149438	147277
50	154798	153144
45	158334	158009

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:24.5DEG  
 Operators:William  
 Test Date:2017-12-16

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.352  
 Humidity:65.7%  
 Test Distance:26.000m [K=1.4470]  
 Remarks:


Checker: DENNY

Assessor: JOE

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-36W-SW-40	WEIGHT:
SPEC.:36W 4000K	DIM.: L:1567mm	SERIAL No.:DMTIES1362
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pw																0
pfc																0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.05	1.01	.98	1.03	.99	.96	.99	.96	.93	.95	.92	.90	.91	.89	.88	.86
2.0	.92	.86	.80	.90	.84	.79	.87	.82	.78	.84	.79	.76	.81	.77	.74	.72
3.0	.81	.73	.67	.80	.72	.67	.77	.71	.65	.74	.69	.64	.71	.67	.63	.61
4.0	.72	.64	.57	.71	.63	.57	.68	.61	.56	.66	.60	.55	.64	.59	.54	.52
5.0	.64	.56	.49	.63	.55	.49	.61	.54	.48	.59	.53	.48	.57	.52	.47	.45
6.0	.58	.49	.43	.57	.49	.43	.55	.48	.42	.54	.47	.42	.52	.46	.42	.40
7.0	.53	.44	.38	.52	.44	.38	.50	.43	.37	.49	.42	.37	.47	.41	.37	.35
8.0	.48	.40	.34	.47	.39	.34	.46	.39	.33	.45	.38	.33	.44	.38	.33	.31
9.0	.44	.36	.30	.43	.36	.30	.42	.35	.30	.41	.35	.30	.40	.34	.30	.28
10.0	.41	.33	.28	.40	.33	.27	.39	.32	.27	.38	.32	.27	.37	.31	.27	.25

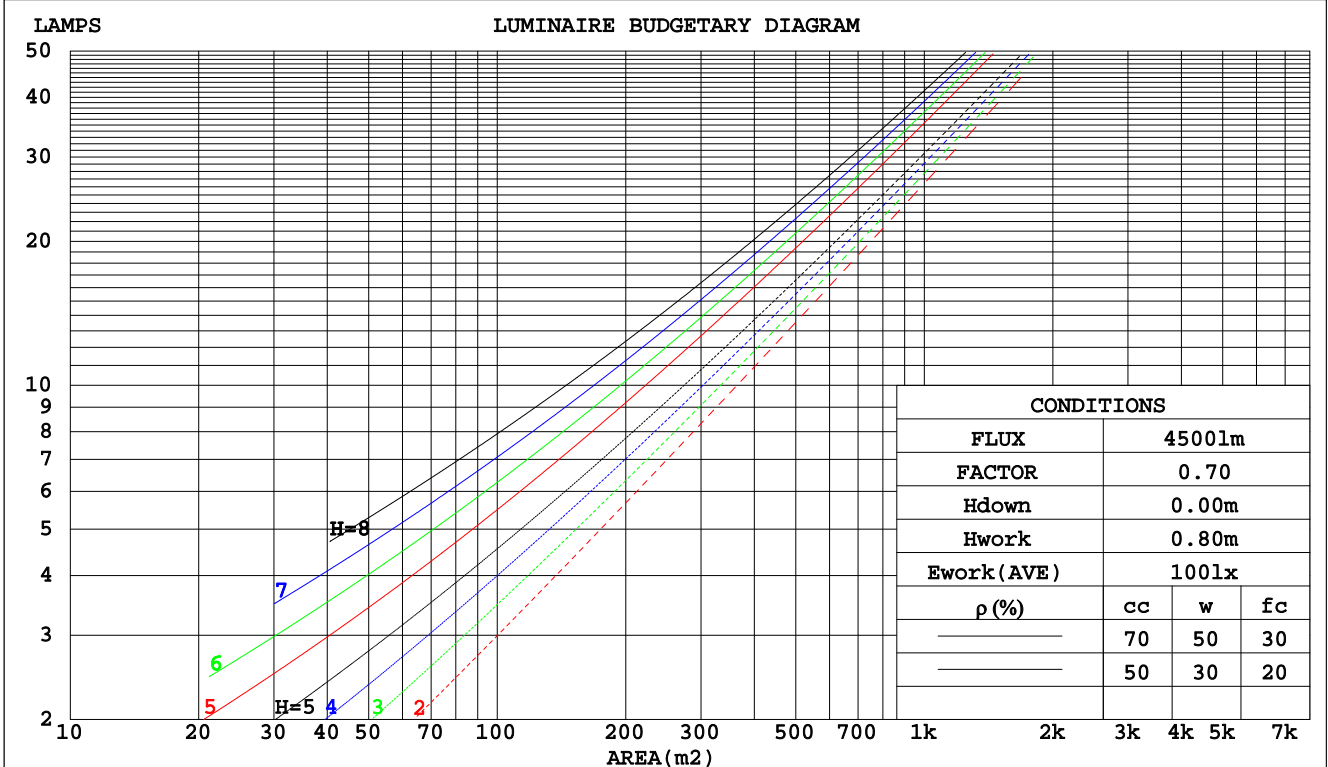

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:24.5DEG  
 Operators:William  
 Test Date:2017-12-16

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.352  
 Humidity:65.7%  
 Test Distance:26.000m [K=1.4470]  
 Remarks:

Checker: DENNY

Assessor: JOE

WEC AND CCEC

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-36W-SW-40	WEIGHT:
SPEC.:36W 4000K	DIM.: L:1567mm	SERIAL No.:DMTIES1362
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.282	.161	.051	.275	.157	.050	.262	.150	.048	.250	.144	.046	.239	.138	.045	
2.0	.274	.150	.046	.267	.147	.045	.256	.142	.044	.245	.138	.043	.235	.133	.042	
3.0	.257	.137	.041	.252	.135	.041	.242	.131	.040	.232	.127	.039	.223	.124	.038	
4.0	.240	.125	.037	.235	.123	.036	.226	.120	.036	.218	.117	.035	.210	.114	.035	
5.0	.224	.114	.033	.219	.113	.033	.211	.110	.032	.204	.107	.032	.197	.105	.032	
6.0	.208	.105	.030	.205	.103	.030	.197	.101	.029	.191	.099	.029	.184	.097	.029	
7.0	.195	.096	.027	.191	.095	.027	.185	.093	.027	.179	.092	.027	.173	.090	.026	
8.0	.182	.089	.025	.179	.088	.025	.174	.087	.025	.168	.085	.025	.163	.084	.024	
9.0	.171	.083	.023	.169	.082	.023	.163	.081	.023	.159	.079	.023	.154	.078	.023	
10.0	.161	.077	.021	.159	.077	.021	.154	.076	.021	.150	.074	.021	.146	.073	.021	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.180	.158	.138	.154	.135	.119	.105	.093	.082	.061	.054	.048	.019	.017	.015	
2.0	.171	.133	.101	.147	.115	.088	.100	.079	.061	.058	.046	.036	.019	.015	.012	
3.0	.163	.116	.077	.140	.100	.067	.096	.069	.047	.056	.040	.028	.018	.013	.009	
4.0	.156	.102	.061	.134	.088	.053	.092	.061	.037	.053	.036	.022	.017	.012	.007	
5.0	.149	.092	.049	.128	.079	.043	.088	.055	.030	.051	.033	.018	.016	.011	.006	
6.0	.142	.083	.041	.122	.072	.036	.084	.050	.025	.049	.030	.015	.016	.010	.005	
7.0	.135	.076	.035	.116	.066	.031	.080	.046	.022	.047	.027	.013	.015	.009	.004	
8.0	.129	.071	.030	.111	.061	.027	.077	.043	.019	.045	.025	.011	.014	.008	.004	
9.0	.123	.066	.027	.106	.057	.023	.073	.040	.017	.043	.024	.010	.014	.008	.003	
10.0	.117	.061	.024	.101	.053	.021	.070	.037	.015	.041	.022	.009	.013	.007	.003	

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:24.5DEG  
 Operators:William  
 Test Date:2017-12-16

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.352  
 Humidity:65.7%  
 Test Distance:26.000m [K=1.4470]  
 Remarks:

Checker: DENNY

Assessor: JOE

UGR(Unified Glare Rating) Table

NAME: LED TRI-PROOF LIGHT		TYPE:BAWATY-36W-SW-40					WEIGHT:				
SPEC.:36W 4000K		DIM.: L:1567mm					SERIAL No.:DMTIES1362				
MFR.: DIMON TECHNOLOGY LTD		SUR.:					Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	Viewed crosswise					Viewed endwise					
x = 2H y = 2H	25.1	26.6	25.4	26.8	27.0	25.1	26.6	25.4	26.8	27.0	
3H	26.2	27.6	26.5	27.8	28.1	26.2	27.6	26.5	27.8	28.0	
4H	26.5	27.8	26.8	28.1	28.3	26.4	27.7	26.8	28.0	28.2	
6H	26.6	27.8	26.9	28.0	28.3	26.5	27.7	26.8	28.0	28.3	
8H	26.5	27.7	26.9	28.0	28.3	26.5	27.6	26.8	27.9	28.2	
12H	26.5	27.6	26.8	27.9	28.2	26.4	27.5	26.8	27.8	28.1	
4H 2H	25.6	26.9	25.9	27.2	27.4	25.6	26.9	25.9	27.2	27.4	
3H	26.9	28.0	27.2	28.3	28.6	26.8	28.0	27.2	28.3	28.6	
4H	27.2	28.3	27.6	28.6	28.9	27.2	28.2	27.5	28.5	28.8	
6H	27.3	28.2	27.7	28.6	29.0	27.3	28.2	27.7	28.5	28.9	
8H	27.3	28.2	27.7	28.5	28.9	27.2	28.1	27.7	28.4	28.8	
12H	27.3	28.0	27.7	28.4	28.8	27.2	28.0	27.6	28.4	28.8	
8H 4H	27.3	28.2	27.7	28.5	28.9	27.3	28.1	27.7	28.5	28.9	
6H	27.5	28.2	27.9	28.6	29.0	27.4	28.1	27.8	28.5	28.9	
8H	27.5	28.1	27.9	28.5	28.9	27.4	28.0	27.9	28.4	28.9	
12H	27.4	28.0	27.9	28.4	28.9	27.4	27.9	27.8	28.3	28.8	
12H 4H	27.3	28.1	27.7	28.4	28.9	27.2	28.0	27.7	28.4	28.8	
6H	27.4	28.1	27.9	28.5	28.9	27.4	28.0	27.8	28.4	28.9	
8H	27.4	28.0	27.9	28.4	28.9	27.4	27.9	27.9	28.3	28.8	
Variations with the observer position at spacings:											
S = 1.0H	+ 0.3 / - 0.3					+ 0.2 / - 0.3					
1.5H	+ 0.2 / - 0.4					+ 0.2 / - 0.4					
2.0H	+ 0.4 / - 0.4					+ 0.4 / - 0.4					

CIE Pub.117, 4500 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 5.2)

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:24.5DEG  
 Operators:William  
 Test Date:2017-12-16

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.352  
 Humidity:65.7%  
 Test Distance:26.000m [K=1.4470]  
 Remarks:

Checker: DENNY

Assessor: JOE

UTILIZATION FACTORS TABLE

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-36W-SW-40	WEIGHT:
SPEC.:36W 4000K	DIM.: L:1567mm	SERIAL No.:DMTIES1362
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	59	47	40	58	47	40	57	46	40	34
0.80	69	58	50	68	57	50	66	56	50	43
1.00	78	67	60	76	66	60	74	68	59	52
1.25	85	75	68	83	74	68	81	73	67	60
1.50	90	80	74	88	80	73	85	78	72	65
2.00	97	89	83	95	87	82	91	85	80	73
2.50	100	93	87	98	92	87	95	89	85	77
3.00	104	97	92	101	96	91	98	93	89	81
4.00	107	102	98	105	100	97	101	97	94	85
5.00	110	105	102	107	103	100	103	100	97	88
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:24.5DEG  
 Operators:William  
 Test Date:2017-12-16


$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.352  
 Humidity:65.7%  
 Test Distance:26.000m [K=1.4470]  
 Remarks:

Checker: DENNY

Assessor: JOE

**ISOCANDELA DIAGRAM**

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-36W-SW-40	WEIGHT:
SPEC.:36W 4000K	DIM.: L:1567mm	SERIAL No.:DMTIES1362
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

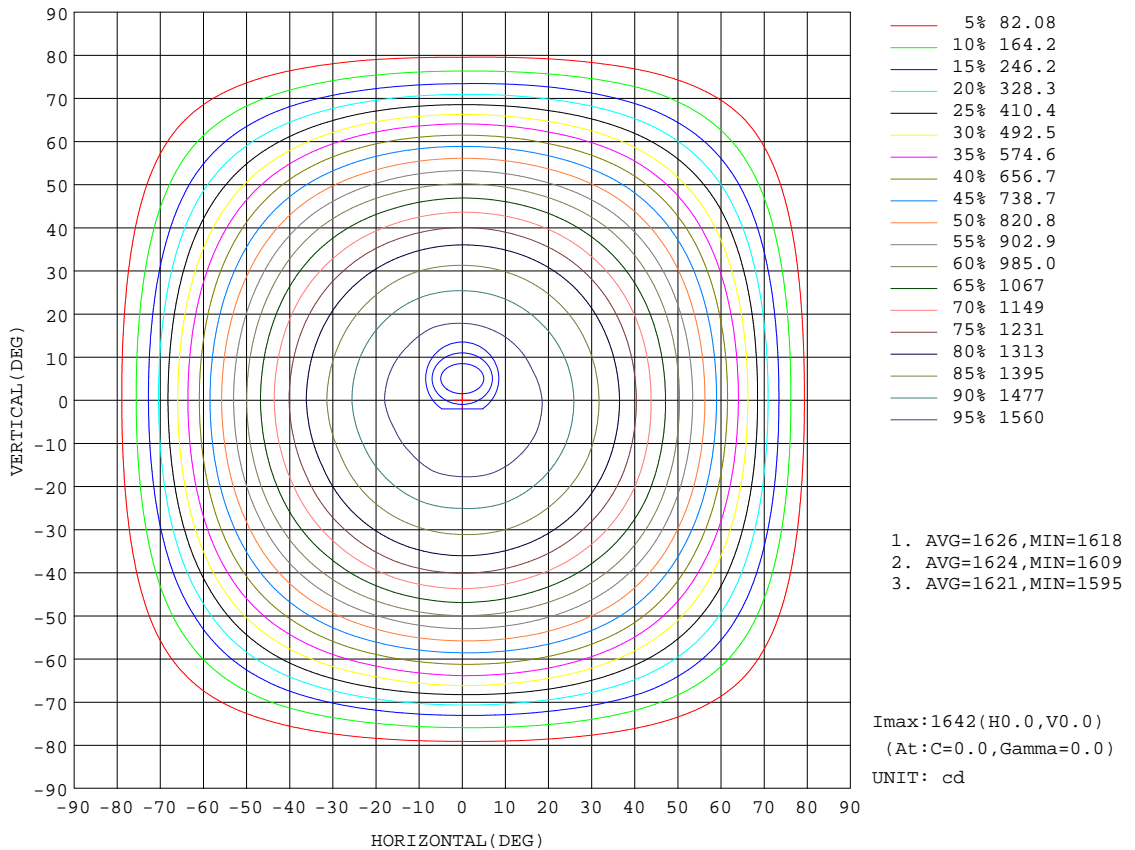

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:24.5DEG  
 Operators:William  
 Test Date:2017-12-16

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.352  
 Humidity:65.7%  
 Test Distance:26.000m [K=1.4470]  
 Remarks:


Checker: DENNY

Assessor: JOE



**AAI Figure**

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-36W-SW-40	WEIGHT:
SPEC.:36W 4000K	DIM.: L:1567mm	SERIAL No.:DMTIES1362
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

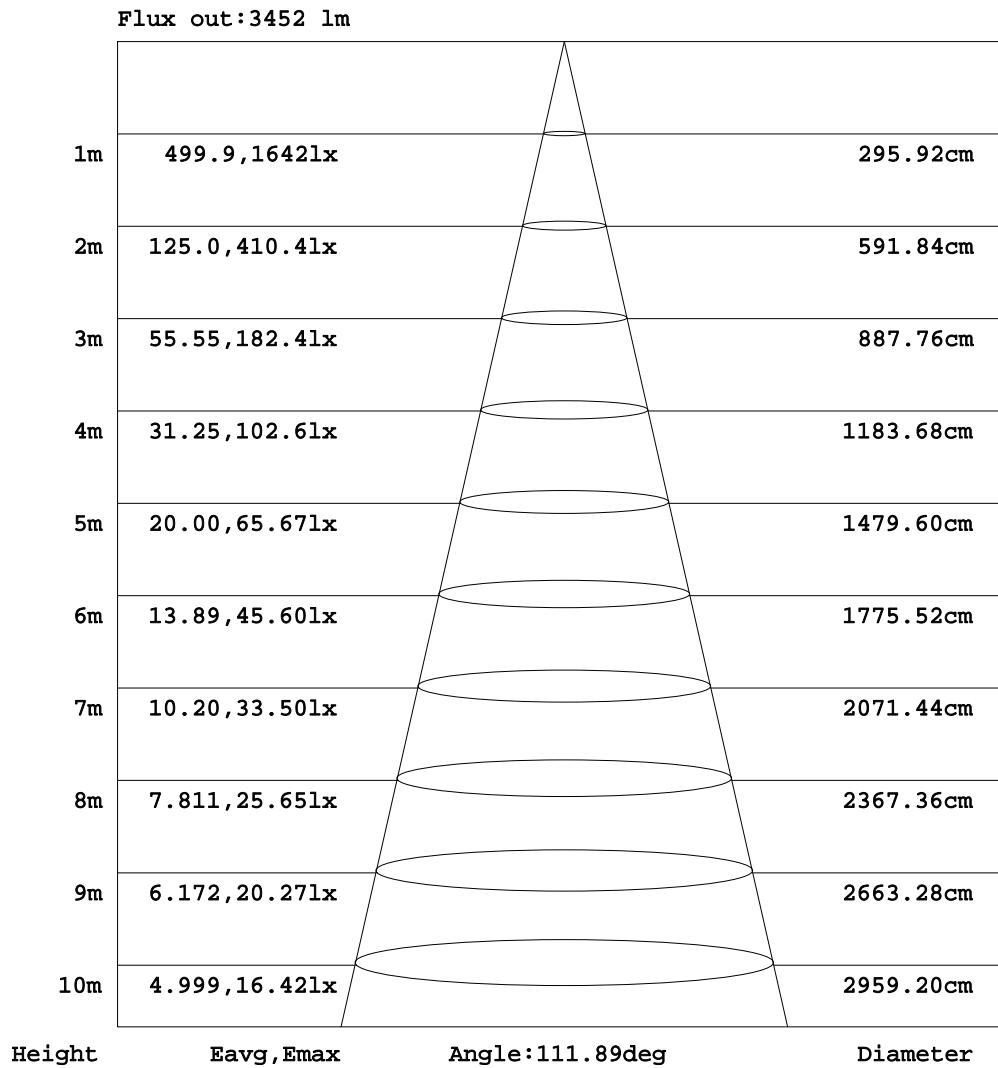

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:24.5DEG  
 Operators:William  
 Test Date:2017-12-16


γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.352  
 Humidity:65.7%  
 Test Distance:26.000m [K=1.4470]  
 Remarks:

Checker: DENNY

Assessor: JOE

**ISOLUX DIAGRAM**

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-36W-SW-40	WEIGHT:
SPEC.:36W 4000K	DIM.: L:1567mm	SERIAL No.:DMTIES1362
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

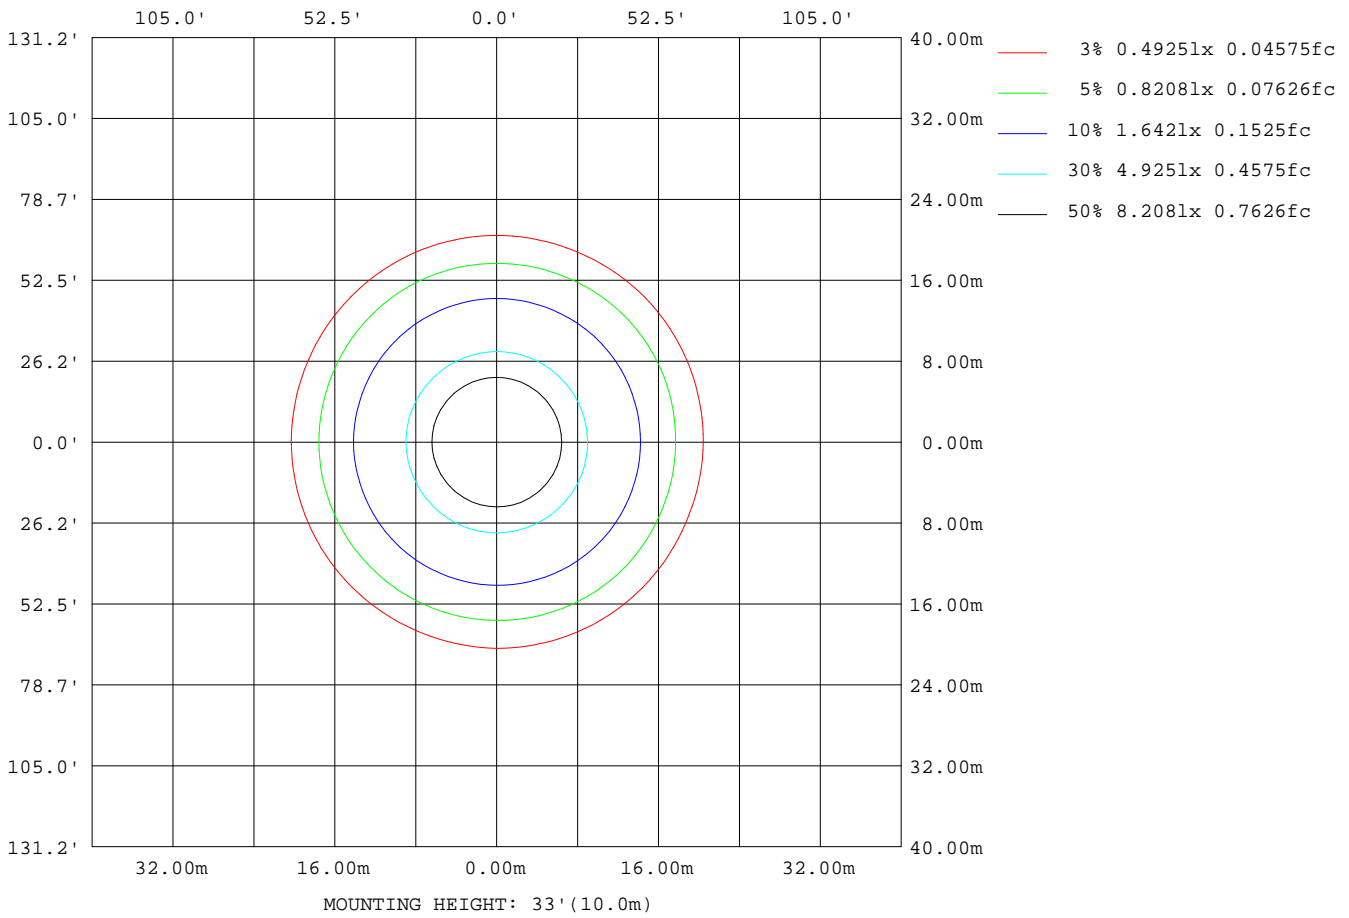


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:24.5DEG  
 Operators:William  
 Test Date:2017-12-16

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.352  
 Humidity:65.7%  
 Test Distance:26.000m [K=1.4470]  
 Remarks:

Checker: DENNY

Assessor: JOE

Planar Illuminance Curve

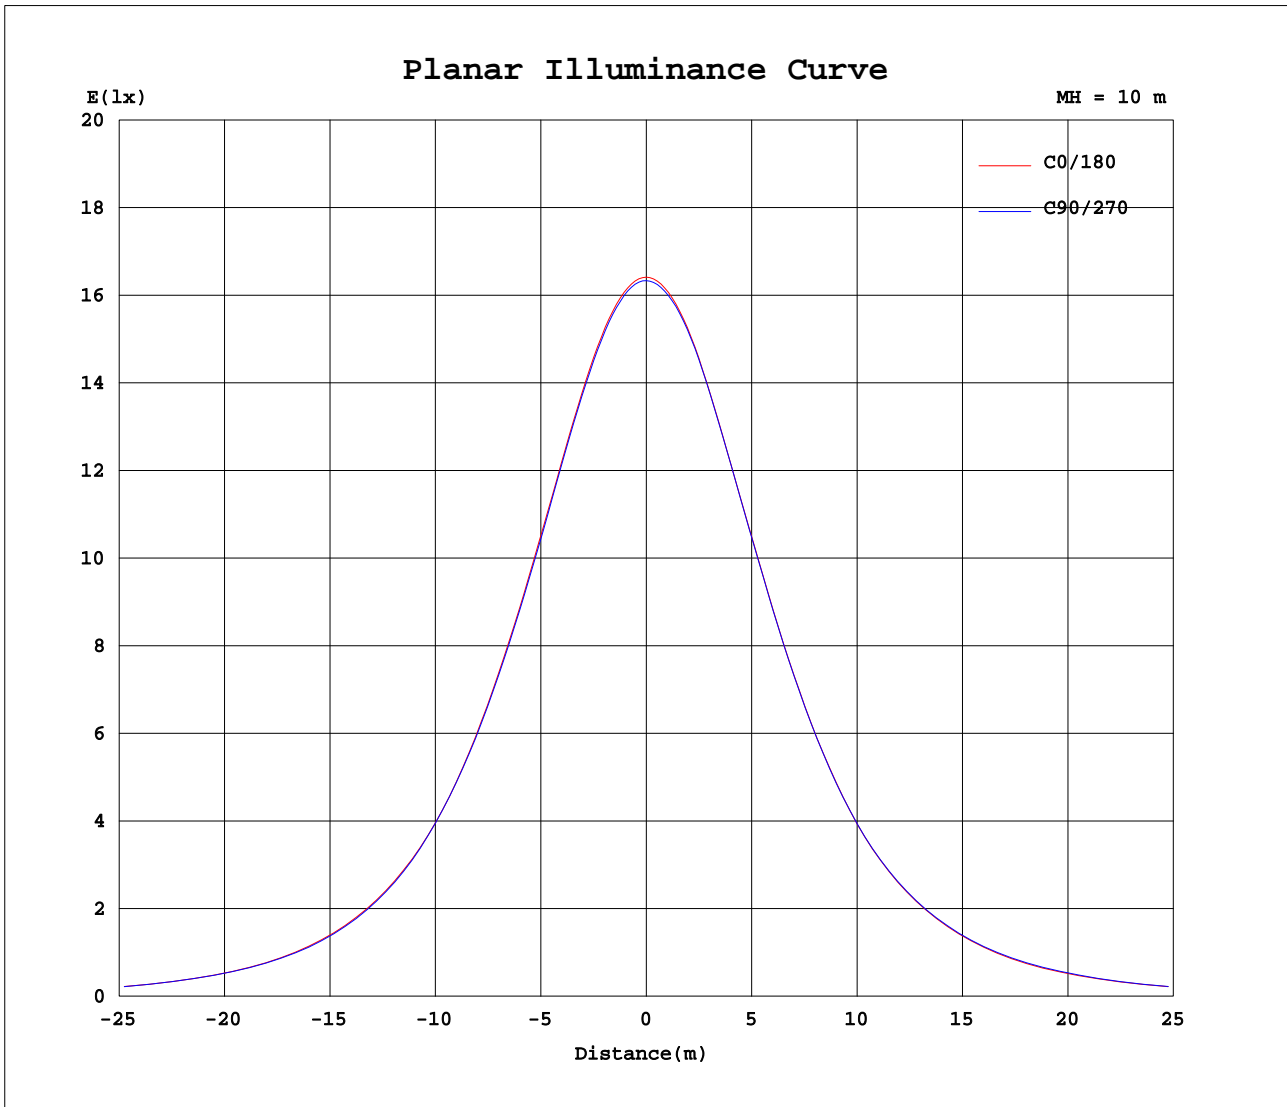

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 24.5DEG  
 Operators: William  
 Test Date: 2017-12-16

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.0.352  
 Humidity: 65.7%  
 Test Distance: 26.000m [K=1.4470]  
 Remarks:

Checker: DENNY

Assessor: JOE

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-36W-SW-40	WEIGHT:
SPEC.:36W 4000K	DIM.: L:1567mm	SERIAL No.:DMTIES1362
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	1642	1639	1637	1636	1633	1632	1631	1630	1642	1639	1637	1636	1633	1632	1631	1630			
5	1636	1633	1633	1632	1629	1627	1625	1625	1635	1632	1631	1630	1628	1626	1626	1625			
10	1619	1618	1619	1616	1612	1611	1607	1609	1619	1616	1613	1614	1614	1611	1610	1610			
15	1589	1589	1588	1586	1581	1581	1577	1579	1586	1585	1582	1586	1584	1582	1581	1580			
20	1546	1547	1544	1542	1538	1539	1532	1530	1539	1539	1538	1542	1538	1537	1537	1539			
25	1488	1489	1487	1486	1478	1481	1478	1478	1484	1484	1484	1485	1482	1482	1481	1484			
30	1422	1422	1418	1419	1413	1411	1409	1407	1418	1414	1413	1418	1416	1416	1415	1418			
35	1341	1339	1337	1336	1333	1330	1326	1323	1334	1333	1330	1330	1332	1332	1335	1337			
40	1239	1240	1233	1233	1234	1232	1223	1223	1235	1232	1227	1228	1233	1232	1234	1237			
45	1120	1125	1115	1112	1117	1112	1102	1104	1112	1111	1108	1107	1114	1116	1114	1119			
50	995	996	990	985	984	978	976	978	985	980	986	984	990	987	993	994			
55	857	854	857	851	845	839	840	836	845	841	848	849	854	852	860	858			
60	706	700	708	702	697	690	687	686	688	689	698	703	702	704	715	714			
65	539	531	534	536	538	521	522	525	528	526	529	537	542	539	548	546			
70	360	361	360	357	350	348	346	333	344	350	352	358	361	364	374	375			
75	200	202	200	197	189	188	186	178	181	195	201	199	203	206	217	212			
80	66.9	71.6	69.9	67.7	68.1	63.9	66.4	58.5	63.1	68.3	72.6	75.9	70.3	78.8	81.1	80.5			
85	12.1	10.9	10.4	9.33	8.33	8.14	7.68	8.03	8.62	10.7	11.2	13.8	12.0	12.4	13.2	14.8			
90	0.29	0.26	0.16	0.18	0.15	0.19	0.18	0.15	0.11	1.31	0.11	0.11	0.50	0.04	1.41	0.52			
95	0.10	0.10	0.14	0.15	0.12	0.12	0.11	0.11	0.14	0.42	0.13	0.14	0.11	0.13	0.11	0.14			
100	0.09	0.10	0.13	0.16	0.14	0.15	0.12	0.12	0.32	0.32	0.32	0.32	0.32	0.29	0.29	0.29			
105	0.08	0.12	0.12	0.17	0.15	0.17	0.13	0.13	0.57	0.53	0.53	0.57	0.54	0.57	0.57	0.54			
110	0.07	0.14	0.11	0.17	0.17	0.19	0.14	0.14	0.89	0.78	0.82	0.86	0.86	0.86	0.82	0.82			
115	0.19	0.22	0.21	0.23	0.25	0.18	0.18	0.25	1.18	1.10	1.14	1.14	1.14	1.14	1.14	1.14			
120	0.57	0.46	0.57	0.53	0.50	0.39	0.46	0.43	1.40	1.39	1.33	1.27	1.43	1.39	1.46	1.36			
125	0.85	0.78	0.75	0.93	0.89	0.82	0.71	0.75	1.50	1.50	1.37	1.30	1.49	1.45	1.51	1.50			
130	1.21	1.14	1.14	1.28	1.25	1.14	0.96	1.16	1.71	1.53	1.47	1.39	1.55	1.50	1.57	1.57			
135	1.71	1.46	1.50	1.71	1.68	1.53	1.21	1.43	1.78	1.57	1.53	1.63	1.78	1.61	1.70	1.71			
140	2.23	2.03	1.96	2.32	2.25	2.25	1.75	2.10	1.96	1.78	1.64	1.82	1.86	1.89	1.85	1.86			
145	2.52	2.42	2.35	2.71	2.60	2.53	2.28	2.32	2.14	1.96	1.85	2.14	2.25	2.25	2.07	2.11			
150	2.78	2.81	2.81	2.89	2.85	2.89	2.64	2.54	2.42	2.28	2.21	2.53	2.57	2.57	2.57	2.43			
155	2.96	3.03	2.98	3.03	2.87	2.92	2.93	2.82	2.78	2.67	2.64	2.85	2.75	2.82	2.72	2.82			
160	3.08	3.06	3.10	3.10	3.03	3.03	2.99	2.97	2.95	2.89	2.84	3.00	3.10	2.93	2.96	2.89			
165	3.42	3.31	3.31	3.39	3.42	3.21	3.24	3.25	3.06	3.10	3.03	3.10	3.21	3.14	3.21	3.05			
170	3.49	3.46	3.56	3.67	3.71	3.53	3.46	3.50	3.28	3.31	3.28	3.43	3.42	3.50	3.56	3.31			
175	3.74	3.60	3.81	3.89	3.88	3.68	3.71	3.61	3.63	3.56	3.56	3.71	3.67	3.68	3.67	3.57			
180	3.81	3.63	3.81	3.92	3.82	3.67	3.71	3.61	3.70	3.81	3.63	3.82	3.85	3.85	3.67	3.71			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:24.5DEG  
 Operators:William  
 Test Date:2017-12-16

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.352  
 Humidity:65.7%  
 Test Distance:26.000m [K=1.4470]  
 Remarks:

Checker: DENNY

Assessor: JOE