
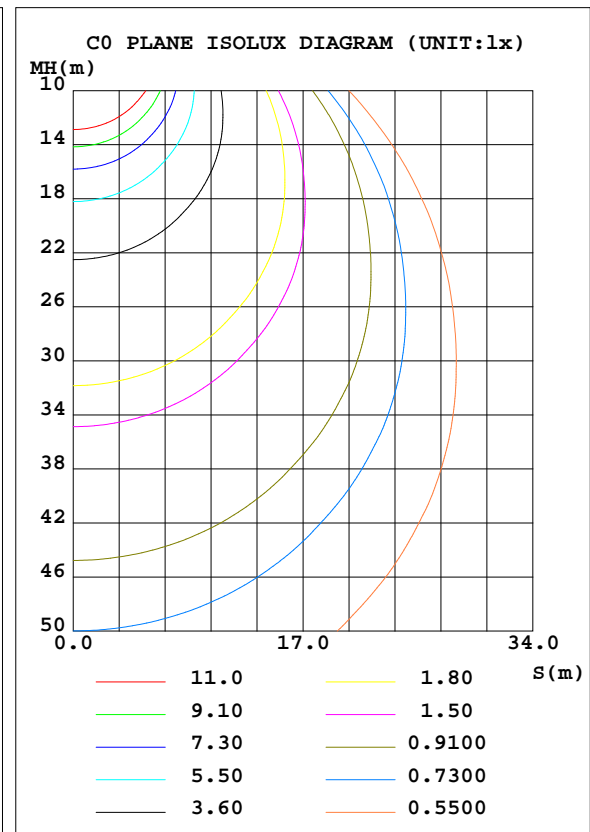


LUMINAIRE PHOTOMETRIC TEST REPORT

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-40W-SW-40	WEIGHT:
SPEC.:40W 4000K	DIM.: L:1267mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 125.00 lm/W			
MODEL	BAWATY-40W-SW-40	Imax(cd)	1824	S/MH(C0/180)	1.28
NOMINAL POWER(W)	40	LOR(%)	100.0	S/MH(C90/270)	1.29
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	5000.1	η UP, DN(C0-180)	0.1,49.8
NOMINAL FLUX(lm)	5000	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.1,50.0
LAMPS INSIDE	1	η up(%)	0.2	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	220	η down(%)	99.8	CIBSE SHR MAX	1.35

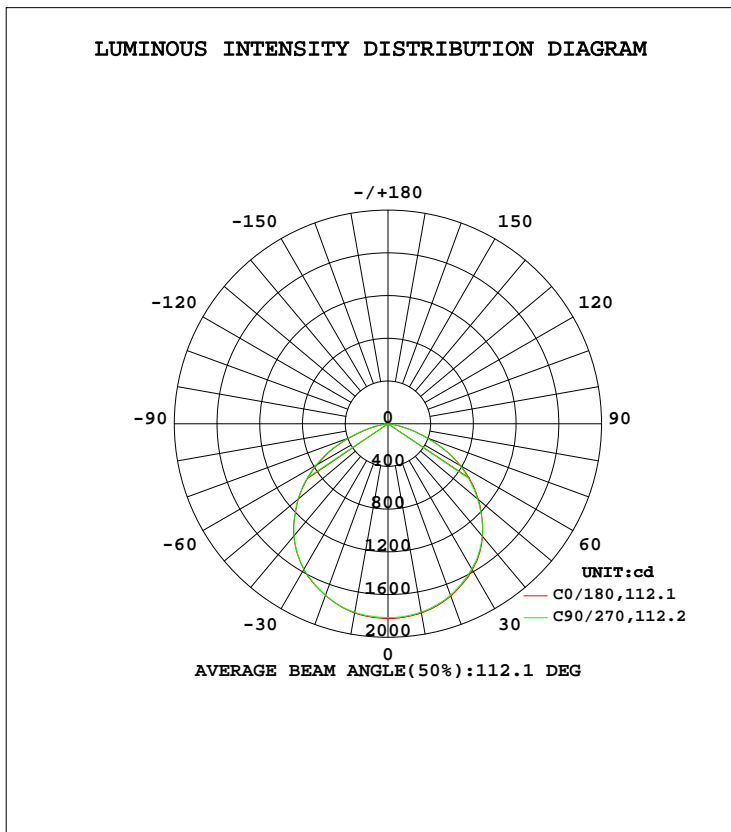

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1799	1798	1791	1786	1799	1792	1793	1789	0- 10	172.3	172.3	3.45,3.45
20	1717	1716	1708	1702	1710	1709	1709	1708	10- 20	496.7	669.0	13.4,13.4
30	1579	1576	1569	1565	1576	1570	1574	1573	20- 30	759.9	1429	28.6,28.6
40	1377	1370	1371	1359	1372	1364	1370	1371	30- 40	925.6	2355	47.1,47.1
50	1106	1100	1094	1084	1094	1095	1100	1103	40- 50	953.7	3308	66.2,66.2
60	784.2	786.6	774.1	763.7	765.0	776.0	780.5	794.4	50- 60	841.7	4150	83,83
70	399.9	400.2	388.8	384.4	382.1	391.2	400.8	415.2	60- 70	582.9	4733	94.7,94.7
80	74.35	77.63	75.62	73.82	70.15	80.63	78.14	90.09	70- 80	235.7	4968	99.4,99.4
90	0.3252	0.1725	0.1624	0.1980	0.1178	0.1175	0.5519	1.569	80- 90	23.31	4992	99.8,99.8
100	0.1033	0.1426	0.1534	0.1327	0.3584	0.3576	0.3567	0.3169	90-100	0.2238	4992	99.8,99.8
110	0.0821	0.1209	0.1906	0.1524	0.9899	0.9104	0.9513	0.9136	100-110	0.4056	4992	99.8,99.8
120	0.6312	0.6310	0.5537	0.5115	1.559	1.477	1.585	1.625	110-120	0.7509	4993	99.9,99.9
130	1.345	1.266	1.385	1.068	1.899	1.636	1.720	1.743	120-130	1.131	4994	99.9,99.9
140	2.483	2.175	2.496	1.940	2.177	1.821	2.063	2.059	130-140	1.384	4996	99.9,99.9
150	3.086	3.126	3.168	2.929	2.691	2.454	2.853	2.851	140-150	1.591	4997	99.9,99.9
160	3.425	3.442	3.368	3.325	3.279	3.158	3.448	3.286	150-160	1.450	4999	100,100
170	3.877	3.956	4.120	3.840	3.640	3.643	3.799	3.959	160-170	1.007	5000	100,100
180	4.233	4.234	4.241	4.118	4.114	4.036	4.280	4.078	170-180	0.3831	5000	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 2837.2 lm

%lum = 56.7%
%lamp = 56.7%

Conical surface Flux(120deg): 4149.9 lm

%lum = 83.0%
%lamp = 83.0%

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:24.5DEG
Operators:William
Test Date:2017-12-16


γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
Humidity:65.7%
Test Distance:26.000m [K=1.4470]
Remarks:

Checker: DENNY

Assessor: JOE

LUMINANCE LIMITATION CURVES

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-40W-SW-40	WEIGHT:
SPEC.:40W 4000K	DIM.: L:1267mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

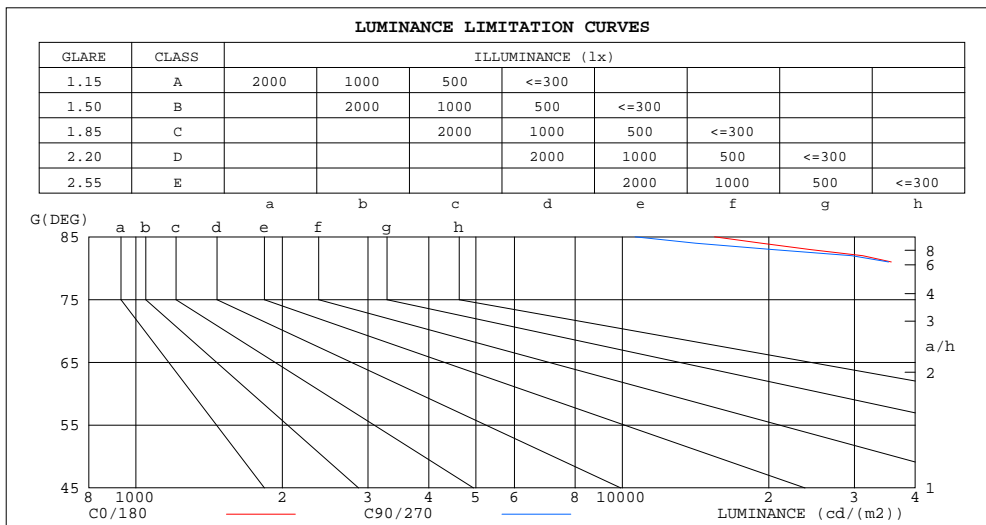

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	15474	10626
80	42818	43550
75	86073	81195
70	116913	113678
65	141821	141318
60	156842	154820
55	166043	163641
50	171998	170160
45	175927	175566

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:


Checker: DENNY

Assessor: JOE

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-40W-SW-40	WEIGHT:
SPEC.:40W 4000K	DIM.: L:1267mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pw																
pfc																
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.05	1.01	.98	1.03	.99	.96	.99	.96	.93	.95	.92	.90	.91	.89	.88	.86
2.0	.92	.86	.80	.90	.84	.79	.87	.82	.78	.84	.79	.76	.81	.77	.74	.72
3.0	.81	.73	.67	.80	.72	.67	.77	.71	.65	.74	.69	.64	.71	.67	.63	.61
4.0	.72	.64	.57	.71	.63	.57	.68	.61	.56	.66	.60	.55	.64	.59	.54	.52
5.0	.64	.56	.49	.63	.55	.49	.61	.54	.48	.59	.53	.48	.57	.52	.47	.45
6.0	.58	.49	.43	.57	.49	.43	.55	.48	.42	.54	.47	.42	.52	.46	.42	.40
7.0	.53	.44	.38	.52	.44	.38	.50	.43	.37	.49	.42	.37	.47	.41	.37	.35
8.0	.48	.40	.34	.47	.39	.34	.46	.39	.33	.45	.38	.33	.44	.38	.33	.31
9.0	.44	.36	.30	.43	.36	.30	.42	.35	.30	.41	.35	.30	.40	.34	.30	.28
10.0	.41	.33	.28	.40	.33	.27	.39	.32	.27	.38	.32	.27	.37	.31	.27	.25

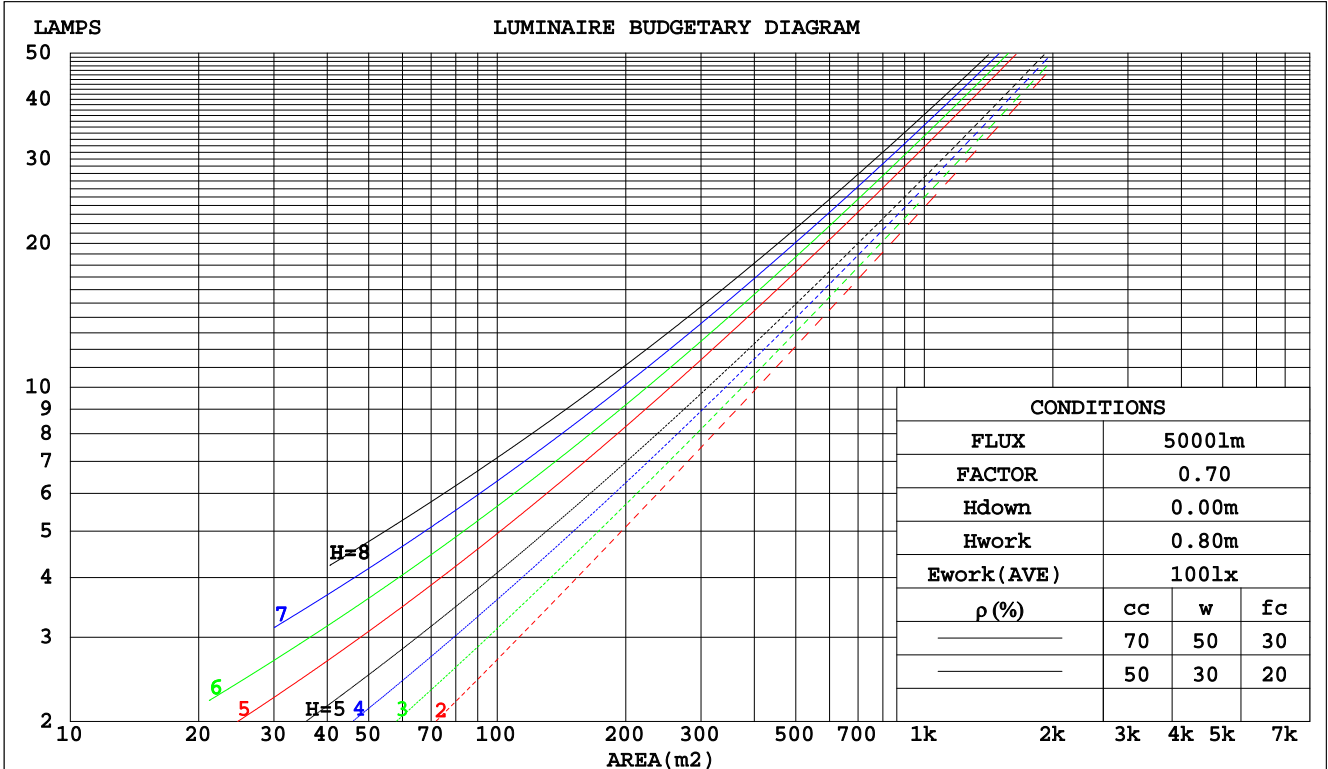

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

WEC AND CCEC

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-40W-SW-40	WEIGHT:
SPEC.:40W 4000K	DIM.: L:1267mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.282	.161	.051	.275	.157	.050	.262	.150	.048	.250	.144	.046	.239	.138	.045	
2.0	.274	.150	.046	.267	.147	.045	.256	.142	.044	.245	.138	.043	.235	.133	.042	
3.0	.257	.137	.041	.252	.135	.041	.242	.131	.040	.232	.127	.039	.223	.124	.038	
4.0	.240	.125	.037	.235	.123	.036	.226	.120	.036	.218	.117	.035	.210	.114	.035	
5.0	.224	.114	.033	.219	.113	.033	.211	.110	.032	.204	.107	.032	.197	.105	.032	
6.0	.208	.105	.030	.205	.103	.030	.197	.101	.029	.191	.099	.029	.184	.097	.029	
7.0	.195	.096	.027	.191	.095	.027	.185	.093	.027	.179	.092	.027	.173	.090	.026	
8.0	.182	.089	.025	.179	.088	.025	.174	.087	.025	.168	.085	.025	.163	.084	.024	
9.0	.171	.083	.023	.169	.082	.023	.163	.081	.023	.159	.079	.023	.154	.078	.023	
10.0	.161	.077	.021	.159	.077	.021	.154	.076	.021	.150	.074	.021	.146	.073	.021	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.180	.158	.138	.154	.135	.119	.105	.093	.082	.061	.054	.048	.019	.017	.015	
2.0	.171	.133	.101	.147	.115	.088	.100	.079	.061	.058	.046	.036	.019	.015	.012	
3.0	.163	.116	.077	.140	.100	.067	.096	.069	.047	.056	.040	.028	.018	.013	.009	
4.0	.156	.102	.061	.134	.088	.053	.092	.061	.037	.053	.036	.022	.017	.012	.007	
5.0	.149	.092	.049	.128	.079	.043	.088	.055	.030	.051	.033	.018	.016	.011	.006	
6.0	.142	.083	.041	.122	.072	.036	.084	.050	.025	.049	.030	.015	.016	.010	.005	
7.0	.135	.076	.035	.116	.066	.031	.080	.046	.022	.047	.027	.013	.015	.009	.004	
8.0	.129	.071	.030	.111	.061	.027	.077	.043	.019	.045	.025	.011	.014	.008	.004	
9.0	.123	.066	.027	.106	.057	.023	.073	.040	.017	.043	.024	.010	.014	.008	.003	
10.0	.117	.061	.024	.101	.053	.021	.070	.037	.015	.041	.022	.009	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

UGR(Unified Glare Rating) Table

NAME: LED TRI-PROOF LIGHT		TYPE:BAWATY-40W-SW-40				WEIGHT:				
SPEC.:40W 4000K		DIM.: L:1267mm				SERIAL No.:				
MFR.: DIMON TECHNOLOGY LTD		SUR.:				Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	25.1	26.6	25.4	26.8	27.0	25.1	26.6	25.4	26.8	27.0
3H	26.2	27.6	26.5	27.8	28.1	26.2	27.6	26.5	27.8	28.0
4H	26.5	27.8	26.8	28.1	28.3	26.4	27.7	26.8	28.0	28.2
6H	26.6	27.8	26.9	28.0	28.3	26.5	27.7	26.8	28.0	28.3
8H	26.5	27.7	26.9	28.0	28.3	26.5	27.6	26.8	27.9	28.2
12H	26.5	27.6	26.8	27.9	28.2	26.4	27.5	26.8	27.8	28.1
4H 2H	25.6	26.9	25.9	27.2	27.4	25.6	26.9	25.9	27.2	27.4
3H	26.9	28.0	27.2	28.3	28.6	26.8	28.0	27.2	28.3	28.6
4H	27.2	28.3	27.6	28.6	28.9	27.2	28.2	27.5	28.5	28.8
6H	27.3	28.2	27.7	28.6	29.0	27.3	28.2	27.7	28.5	28.9
8H	27.3	28.2	27.7	28.5	28.9	27.2	28.1	27.7	28.4	28.8
12H	27.3	28.0	27.7	28.4	28.8	27.2	28.0	27.6	28.4	28.8
8H 4H	27.3	28.2	27.7	28.5	28.9	27.3	28.1	27.7	28.5	28.9
6H	27.5	28.2	27.9	28.6	29.0	27.4	28.1	27.8	28.5	28.9
8H	27.5	28.1	27.9	28.5	28.9	27.4	28.0	27.9	28.4	28.9
12H	27.4	28.0	27.9	28.4	28.9	27.4	27.9	27.8	28.3	28.8
12H 4H	27.3	28.1	27.7	28.4	28.9	27.2	28.0	27.7	28.4	28.8
6H	27.4	28.1	27.9	28.5	28.9	27.4	28.0	27.8	28.4	28.9
8H	27.4	28.0	27.9	28.4	28.9	27.4	27.9	27.9	28.3	28.8
Variations with the observer position at spacings:										
S = 1.0H	+ 0.3 / - 0.3					+ 0.2 / - 0.3				
1.5H	+ 0.2 / - 0.4					+ 0.2 / - 0.4				
2.0H	+ 0.4 / - 0.4					+ 0.4 / - 0.4				

CIE Pub.117, 5000 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 5.6)

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

UTILIZATION FACTORS TABLE

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-40W-SW-40	WEIGHT:
SPEC.:40W 4000K	DIM.: L:1267mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	59	47	40	58	47	40	57	46	40	34
0.80	69	58	50	68	57	50	66	56	50	43
1.00	78	67	60	76	66	60	74	68	59	52
1.25	85	75	68	83	74	68	81	73	67	60
1.50	90	80	74	88	80	73	85	78	72	65
2.00	97	89	83	95	87	82	91	85	80	73
2.50	100	93	87	98	92	87	95	89	85	77
3.00	104	97	92	101	96	91	98	93	89	81
4.00	107	102	98	105	100	97	101	97	94	85
5.00	110	105	102	107	103	100	103	100	97	88
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16


γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

ISOCANDELA DIAGRAM

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-40W-SW-40	WEIGHT:
SPEC.:40W 4000K	DIM.: L:1267mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

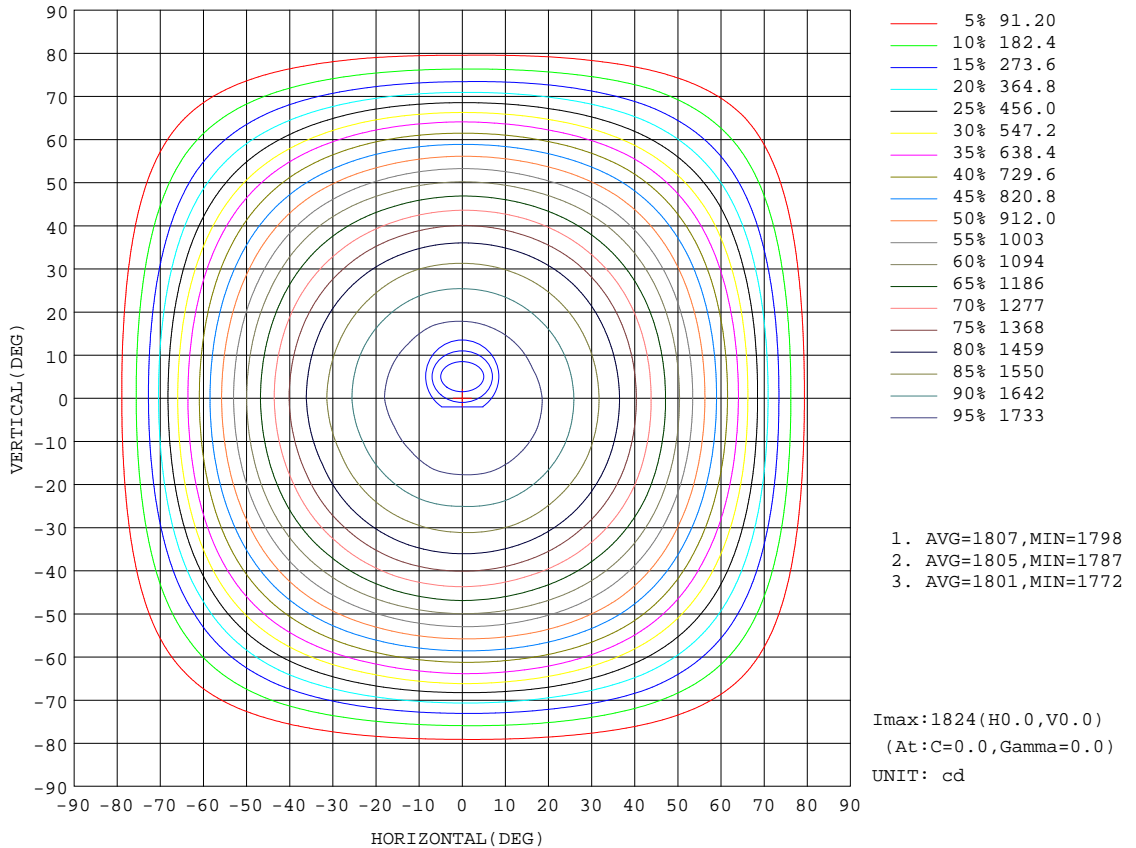

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16


γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

AAI Figure

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-40W-SW-40	WEIGHT:
SPEC.:40W 4000K	DIM.: L:1267mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

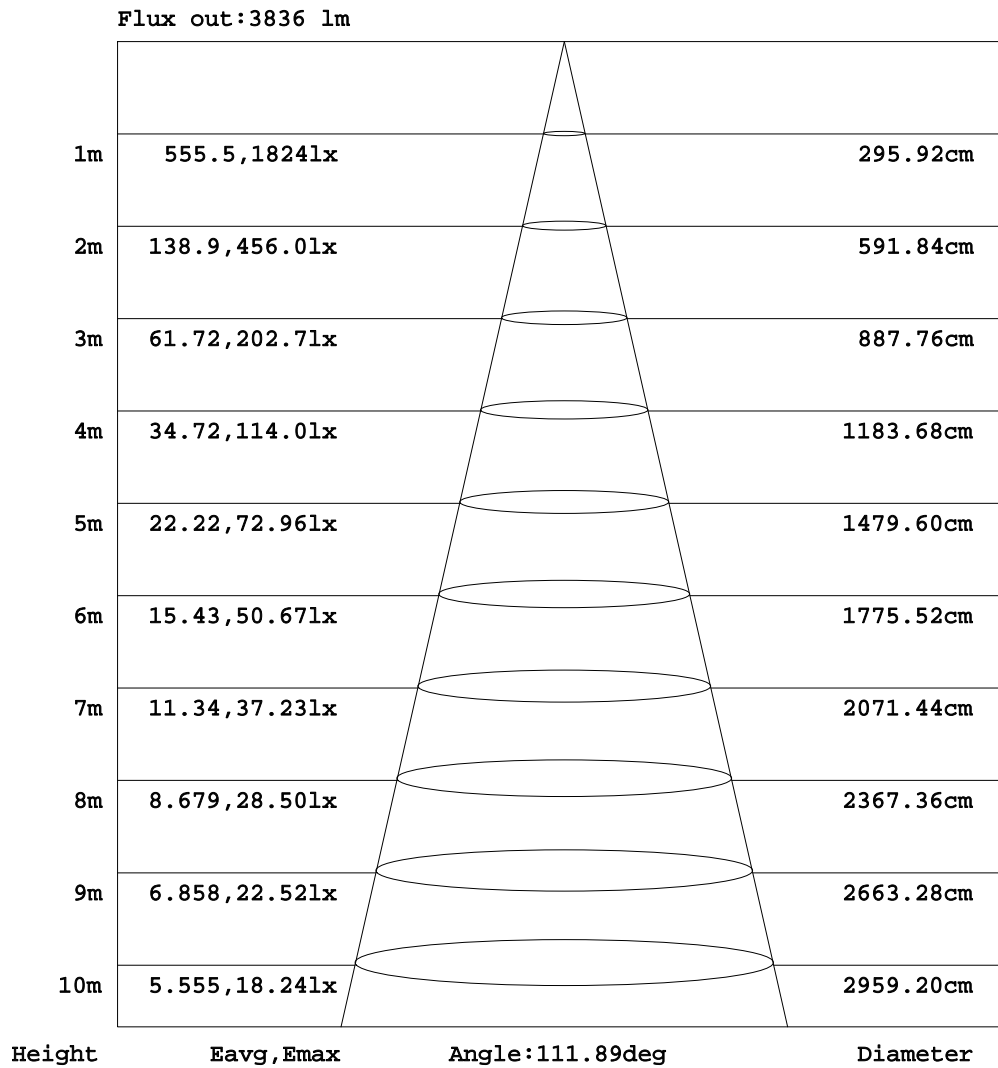

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16


γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

ISOLUX DIAGRAM

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-40W-SW-40	WEIGHT:
SPEC.:40W 4000K	DIM.: L:1267mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

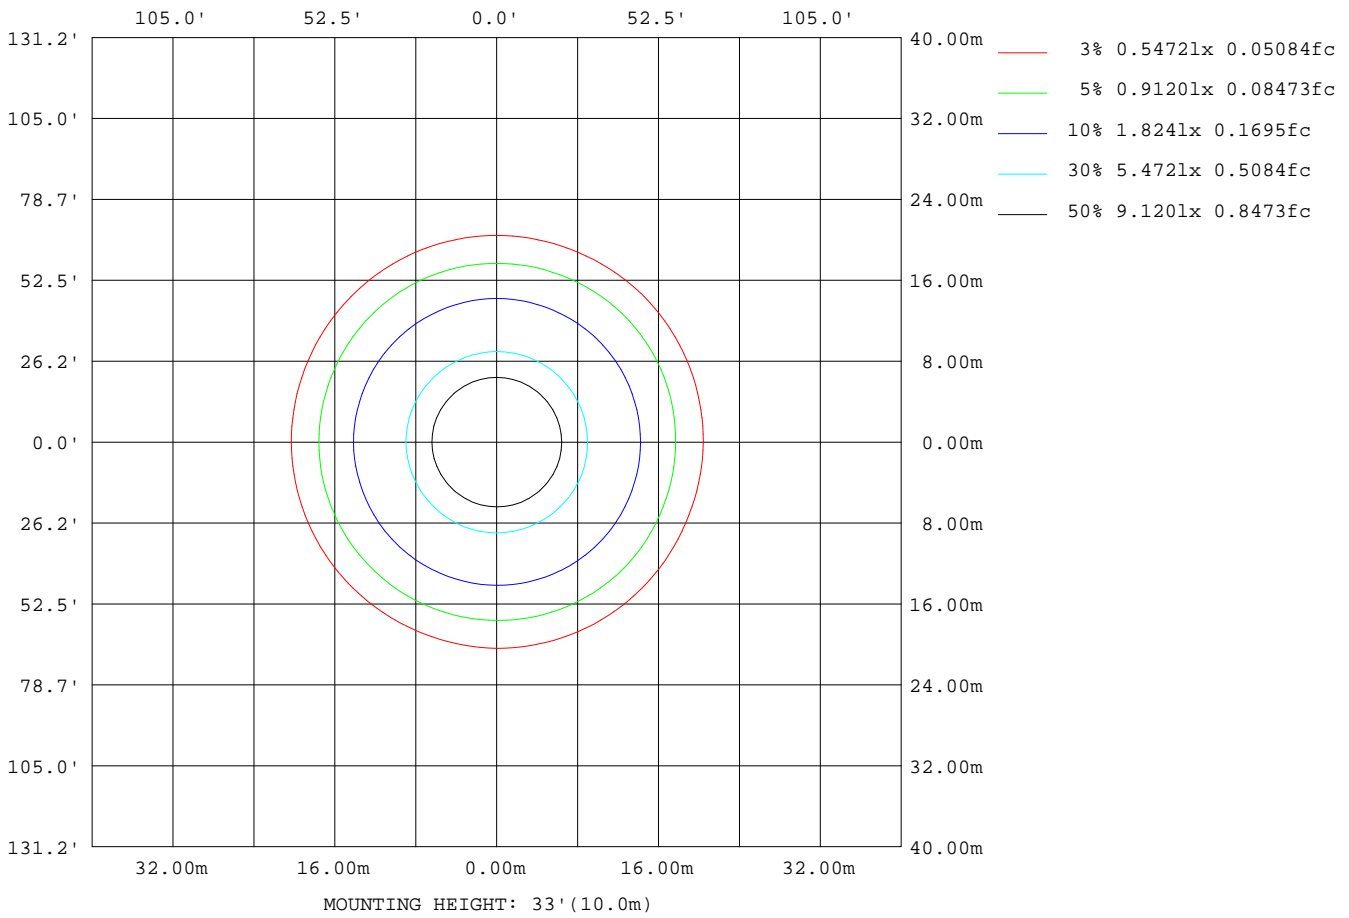


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

Planar Illuminance Curve

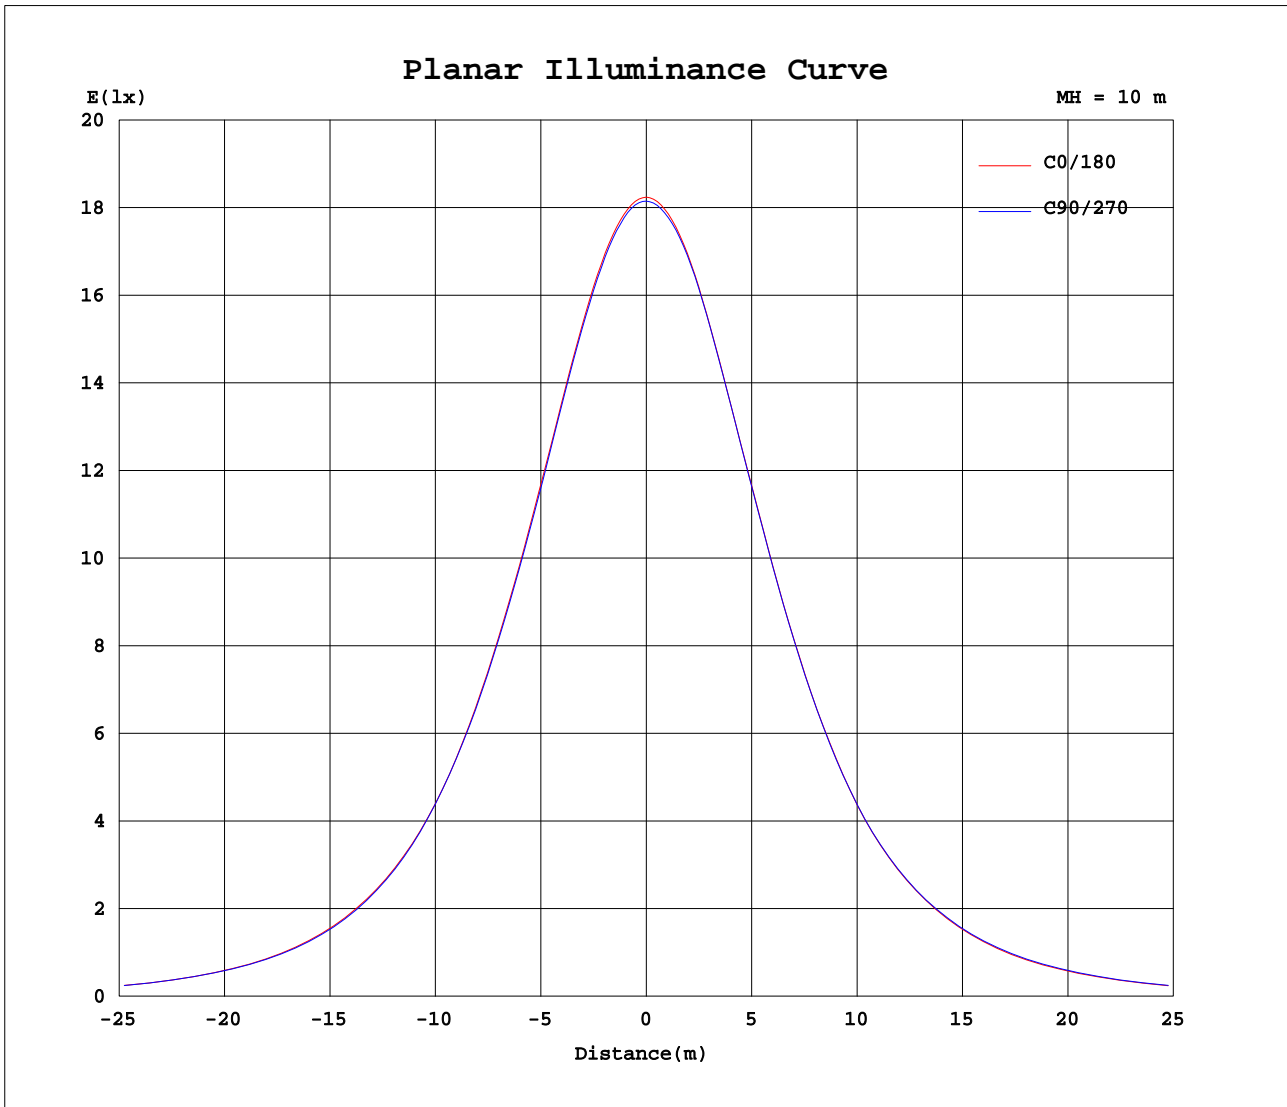

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 24.5DEG
 Operators: William
 Test Date: 2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity: 65.7%
 Test Distance: 26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-40W-SW-40	WEIGHT:
SPEC.:40W 4000K	DIM.: L:1267mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	1824	1821	1819	1818	1815	1813	1812	1811	1824	1821	1819	1818	1815	1813	1812	1811			
5	1817	1815	1815	1813	1809	1808	1806	1805	1817	1814	1812	1811	1809	1807	1806	1805			
10	1799	1798	1798	1796	1791	1790	1786	1788	1799	1795	1792	1793	1793	1791	1789	1788			
15	1766	1766	1764	1762	1756	1757	1753	1754	1762	1761	1758	1762	1760	1758	1757	1756			
20	1717	1718	1716	1714	1708	1710	1702	1700	1710	1710	1709	1713	1709	1708	1708	1710			
25	1653	1654	1652	1651	1643	1645	1642	1642	1649	1649	1649	1650	1647	1646	1646	1649			
30	1579	1580	1576	1577	1569	1568	1565	1564	1576	1571	1570	1575	1574	1573	1573	1575			
35	1490	1488	1485	1485	1481	1478	1473	1470	1482	1481	1478	1478	1480	1480	1483	1485			
40	1377	1378	1370	1370	1371	1369	1359	1359	1372	1369	1364	1364	1370	1368	1371	1374			
45	1244	1250	1239	1236	1241	1236	1225	1227	1236	1235	1231	1230	1238	1239	1238	1243			
50	1106	1107	1100	1094	1094	1087	1084	1087	1094	1089	1095	1093	1100	1097	1103	1105			
55	952	949	952	945	939	932	933	929	939	934	942	943	949	947	956	954			
60	784	778	787	781	774	767	764	762	765	766	776	781	780	782	794	793			
65	599	589	593	595	597	579	580	583	587	585	588	597	602	599	609	607			
70	400	401	400	397	389	387	384	370	382	389	391	398	401	405	415	416			
75	223	224	223	219	210	209	207	198	201	217	223	221	225	229	241	236			
80	74.4	79.6	77.6	75.2	75.6	71.0	73.8	65.0	70.2	75.9	80.6	84.3	78.1	87.6	90.1	89.5			
85	13.5	12.2	11.5	10.4	9.26	9.04	8.53	8.92	9.58	11.9	12.5	15.3	13.3	13.8	14.6	16.5			
90	0.33	0.29	0.17	0.20	0.16	0.21	0.20	0.16	0.12	1.46	0.12	0.12	0.55	0.04	1.57	0.58			
95	0.11	0.11	0.15	0.16	0.13	0.13	0.12	0.13	0.16	0.47	0.14	0.16	0.12	0.14	0.12	0.16			
100	0.10	0.12	0.14	0.17	0.15	0.16	0.13	0.14	0.36	0.36	0.36	0.36	0.36	0.32	0.32	0.32			
105	0.09	0.13	0.13	0.18	0.17	0.19	0.14	0.15	0.63	0.59	0.59	0.63	0.59	0.64	0.63	0.60			
110	0.08	0.15	0.12	0.19	0.19	0.22	0.15	0.16	0.99	0.87	0.91	0.95	0.95	0.95	0.91	0.91			
115	0.21	0.24	0.24	0.26	0.28	0.20	0.20	0.28	1.31	1.23	1.27	1.27	1.27	1.27	1.27	1.27			
120	0.63	0.51	0.63	0.59	0.55	0.43	0.51	0.48	1.56	1.54	1.48	1.41	1.59	1.55	1.63	1.51			
125	0.95	0.87	0.83	1.03	0.99	0.91	0.78	0.83	1.66	1.66	1.53	1.44	1.65	1.61	1.67	1.67			
130	1.34	1.27	1.27	1.43	1.39	1.27	1.07	1.28	1.90	1.70	1.64	1.55	1.72	1.67	1.74	1.75			
135	1.90	1.62	1.66	1.90	1.86	1.70	1.35	1.59	1.98	1.74	1.70	1.82	1.98	1.79	1.89	1.91			
140	2.48	2.26	2.18	2.57	2.50	2.49	1.94	2.33	2.18	1.98	1.82	2.02	2.06	2.10	2.06	2.06			
145	2.80	2.69	2.61	3.01	2.89	2.81	2.53	2.58	2.37	2.18	2.06	2.38	2.50	2.50	2.30	2.34			
150	3.09	3.13	3.13	3.21	3.17	3.21	2.93	2.82	2.69	2.53	2.45	2.82	2.85	2.85	2.85	2.70			
155	3.28	3.36	3.31	3.37	3.19	3.24	3.25	3.14	3.09	2.97	2.93	3.17	3.05	3.13	3.02	3.14			
160	3.43	3.40	3.44	3.44	3.37	3.37	3.33	3.30	3.28	3.21	3.16	3.33	3.45	3.25	3.29	3.22			
165	3.80	3.68	3.68	3.77	3.80	3.57	3.60	3.61	3.40	3.45	3.36	3.45	3.57	3.49	3.56	3.39			
170	3.88	3.85	3.96	4.08	4.12	3.92	3.84	3.89	3.64	3.68	3.64	3.81	3.80	3.89	3.96	3.68			
175	4.15	4.00	4.23	4.33	4.31	4.08	4.12	4.01	4.04	3.96	3.96	4.13	4.08	4.08	4.08	3.97			
180	4.23	4.04	4.23	4.36	4.24	4.08	4.12	4.01	4.11	4.24	4.04	4.24	4.28	4.28	4.08	4.13			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE