
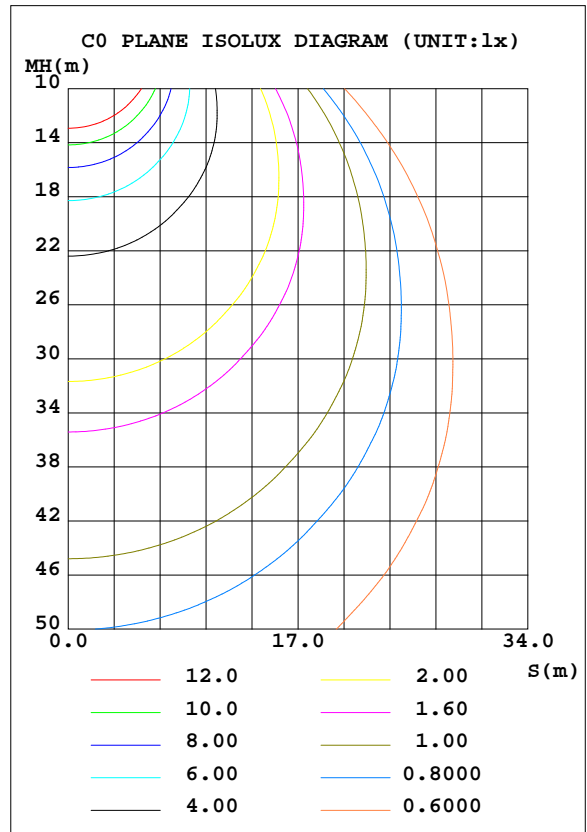


LUMINAIRE PHOTOMETRIC TEST REPORT

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-44W-SW-40	WEIGHT:
SPEC.:44W 4000K	DIM.: L:1567mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 125.00 lm/W			
MODEL	BAWATY-44W-SW-40	Imax(cd)	2006	S/MH(C0/180)	1.28
NOMINAL POWER(W)	44	LOR(%)	100.0	S/MH(C90/270)	1.29
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	5500.1	η UP, DN(C0-180)	0.1,49.8
NOMINAL FLUX(lm)	5500	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.1,50.0
LAMPS INSIDE	1	η up(%)	0.2	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	220	η down(%)	99.8	CIBSE SHR MAX	1.35

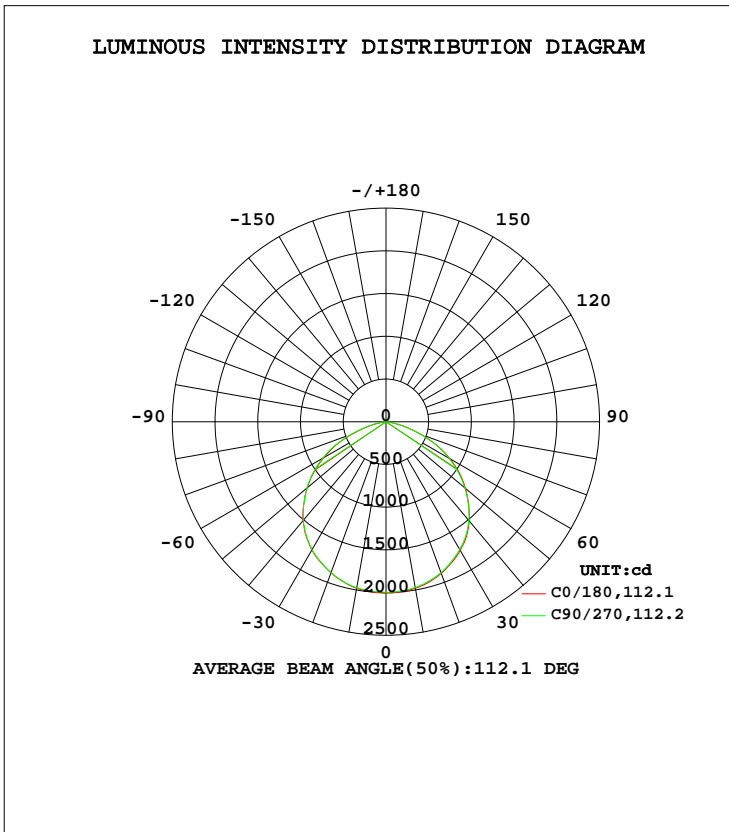

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1979	1978	1970	1964	1978	1971	1972	1968	0- 10	189.5	189.5	3.45,3.45
20	1889	1887	1879	1872	1881	1880	1880	1878	10- 20	546.4	735.9	13.4,13.4
30	1737	1734	1726	1722	1734	1727	1731	1730	20- 30	835.9	1572	28.6,28.6
40	1515	1507	1508	1495	1509	1500	1507	1509	30- 40	1018	2590	47.1,47.1
50	1216	1210	1203	1193	1204	1205	1210	1213	40- 50	1049	3639	66.2,66.2
60	862.6	865.2	851.5	840.0	841.5	853.6	858.5	873.8	50- 60	925.8	4565	83,83
70	439.9	440.2	427.7	422.8	420.3	430.4	440.9	456.7	60- 70	641.2	5206	94.7,94.7
80	81.79	85.39	83.19	81.20	77.17	88.69	85.95	99.10	70- 80	259.3	5465	99.4,99.4
90	0.3577	0.1897	0.1786	0.2178	0.1296	0.1293	0.6071	1.725	80- 90	25.64	5491	99.8,99.8
100	0.1136	0.1568	0.1688	0.1460	0.3942	0.3934	0.3923	0.3486	90-100	0.2461	5491	99.8,99.8
110	0.0903	0.1330	0.2097	0.1677	1.089	1.001	1.046	1.005	100-110	0.4462	5492	99.8,99.8
120	0.6943	0.6941	0.6091	0.5626	1.714	1.625	1.744	1.788	110-120	0.8260	5492	99.9,99.9
130	1.479	1.393	1.524	1.175	2.089	1.799	1.892	1.918	120-130	1.244	5494	99.9,99.9
140	2.732	2.393	2.746	2.134	2.395	2.003	2.269	2.265	130-140	1.523	5495	99.9,99.9
150	3.394	3.438	3.485	3.222	2.960	2.699	3.139	3.136	140-150	1.750	5497	99.9,99.9
160	3.768	3.787	3.705	3.658	3.607	3.473	3.792	3.615	150-160	1.595	5499	100,100
170	4.264	4.352	4.532	4.224	4.004	4.007	4.178	4.355	160-170	1.107	5500	100,100
180	4.656	4.657	4.666	4.529	4.526	4.439	4.708	4.486	170-180	0.4214	5500	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 3120.9 lm

%lum = 56.7%
%lamp = 56.7%

Conical surface Flux(120deg): 4564.8 lm

%lum = 83.0%
%lamp = 83.0%

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:24.5DEG
Operators:William
Test Date:2017-12-16


γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
Humidity:65.7%
Test Distance:26.000m [K=1.4470]
Remarks:

Checker: DENNY

Assessor: JOE

LUMINANCE LIMITATION CURVES

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-44W-SW-40	WEIGHT:
SPEC.:44W 4000K	DIM.: L:1567mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

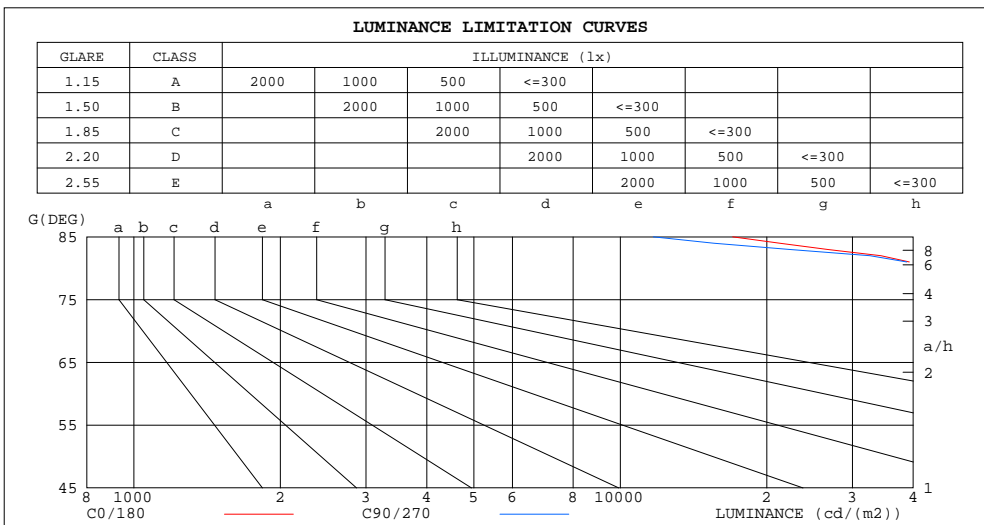

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	17021	11688
80	47099	47905
75	94680	89315
70	128604	125046
65	156003	155450
60	172527	170302
55	182647	180005
50	189197	187176
45	193520	193123

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:


Checker: DENNY

Assessor: JOE

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-44W-SW-40	WEIGHT:
SPEC.:44W 4000K	DIM.: L:1567mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pw																
pfc																
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.05	1.01	.98	1.03	.99	.96	.99	.96	.93	.95	.92	.90	.91	.89	.88	.86
2.0	.92	.86	.80	.90	.84	.79	.87	.82	.78	.84	.79	.76	.81	.77	.74	.72
3.0	.81	.73	.67	.80	.72	.67	.77	.71	.65	.74	.69	.64	.71	.67	.63	.61
4.0	.72	.64	.57	.71	.63	.57	.68	.61	.56	.66	.60	.55	.64	.59	.54	.52
5.0	.64	.56	.49	.63	.55	.49	.61	.54	.48	.59	.53	.48	.57	.52	.47	.45
6.0	.58	.49	.43	.57	.49	.43	.55	.48	.42	.54	.47	.42	.52	.46	.42	.40
7.0	.53	.44	.38	.52	.44	.38	.50	.43	.37	.49	.42	.37	.47	.41	.37	.35
8.0	.48	.40	.34	.47	.39	.34	.46	.39	.33	.45	.38	.33	.44	.38	.33	.31
9.0	.44	.36	.30	.43	.36	.30	.42	.35	.30	.41	.35	.30	.40	.34	.30	.28
10.0	.41	.33	.28	.40	.33	.27	.39	.32	.27	.38	.32	.27	.37	.31	.27	.25

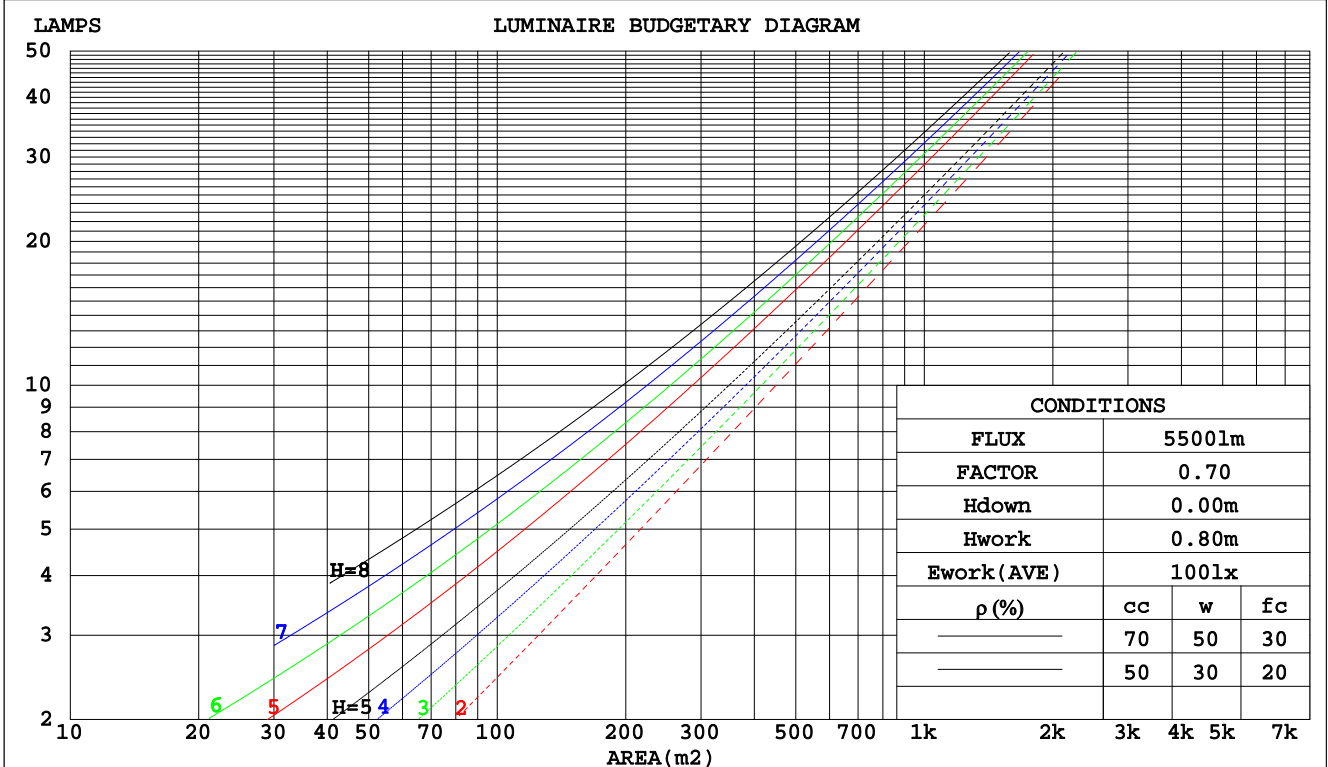

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

WEC AND CCEC

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-44W-SW-40	WEIGHT:
SPEC.:44W 4000K	DIM.: L:1567mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.282	.161	.051	.275	.157	.050	.262	.150	.048	.250	.144	.046	.239	.138	.045	
2.0	.274	.150	.046	.267	.147	.045	.256	.142	.044	.245	.138	.043	.235	.133	.042	
3.0	.257	.137	.041	.252	.135	.041	.242	.131	.040	.232	.127	.039	.223	.124	.038	
4.0	.240	.125	.037	.235	.123	.036	.226	.120	.036	.218	.117	.035	.210	.114	.035	
5.0	.224	.114	.033	.219	.113	.033	.211	.110	.032	.204	.107	.032	.197	.105	.032	
6.0	.208	.105	.030	.205	.103	.030	.197	.101	.029	.191	.099	.029	.184	.097	.029	
7.0	.195	.096	.027	.191	.095	.027	.185	.093	.027	.179	.092	.027	.173	.090	.026	
8.0	.182	.089	.025	.179	.088	.025	.174	.087	.025	.168	.085	.025	.163	.084	.024	
9.0	.171	.083	.023	.169	.082	.023	.163	.081	.023	.159	.079	.023	.154	.078	.023	
10.0	.161	.077	.021	.159	.077	.021	.154	.076	.021	.150	.074	.021	.146	.073	.021	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.180	.158	.138	.154	.135	.119	.105	.093	.082	.061	.054	.048	.019	.017	.015	
2.0	.171	.133	.101	.147	.115	.088	.100	.079	.061	.058	.046	.036	.019	.015	.012	
3.0	.163	.116	.077	.140	.100	.067	.096	.069	.047	.056	.040	.028	.018	.013	.009	
4.0	.156	.102	.061	.134	.088	.053	.092	.061	.037	.053	.036	.022	.017	.012	.007	
5.0	.149	.092	.049	.128	.079	.043	.088	.055	.030	.051	.033	.018	.016	.011	.006	
6.0	.142	.083	.041	.122	.072	.036	.084	.050	.025	.049	.030	.015	.016	.010	.005	
7.0	.135	.076	.035	.116	.066	.031	.080	.046	.022	.047	.027	.013	.015	.009	.004	
8.0	.129	.071	.030	.111	.061	.027	.077	.043	.019	.045	.025	.011	.014	.008	.004	
9.0	.123	.066	.027	.106	.057	.023	.073	.040	.017	.043	.024	.010	.014	.008	.003	
10.0	.117	.061	.024	.101	.053	.021	.070	.037	.015	.041	.022	.009	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

UGR(Unified Glare Rating) Table

NAME: LED TRI-PROOF LIGHT		TYPE:BAWATY-44W-SW-40				WEIGHT:				
SPEC.:44W 4000K		DIM.: L:1567mm				SERIAL No.:				
MFR.: DIMON TECHNOLOGY LTD		SUR.:				Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	25.1	26.6	25.4	26.8	27.0	25.1	26.6	25.4	26.8	27.0
3H	26.2	27.6	26.5	27.8	28.1	26.2	27.6	26.5	27.8	28.0
4H	26.5	27.8	26.8	28.1	28.3	26.4	27.7	26.8	28.0	28.2
6H	26.6	27.8	26.9	28.0	28.3	26.5	27.7	26.8	28.0	28.3
8H	26.5	27.7	26.9	28.0	28.3	26.5	27.6	26.8	27.9	28.2
12H	26.5	27.6	26.8	27.9	28.2	26.4	27.5	26.8	27.8	28.1
4H 2H	25.6	26.9	25.9	27.2	27.4	25.6	26.9	25.9	27.2	27.4
3H	26.9	28.0	27.2	28.3	28.6	26.8	28.0	27.2	28.3	28.6
4H	27.2	28.3	27.6	28.6	28.9	27.2	28.2	27.5	28.5	28.8
6H	27.3	28.2	27.7	28.6	29.0	27.3	28.2	27.7	28.5	28.9
8H	27.3	28.2	27.7	28.5	28.9	27.2	28.1	27.7	28.4	28.8
12H	27.3	28.0	27.7	28.4	28.8	27.2	28.0	27.6	28.4	28.8
8H 4H	27.3	28.2	27.7	28.5	28.9	27.3	28.1	27.7	28.5	28.9
6H	27.5	28.2	27.9	28.6	29.0	27.4	28.1	27.8	28.5	28.9
8H	27.5	28.1	27.9	28.5	28.9	27.4	28.0	27.9	28.4	28.9
12H	27.4	28.0	27.9	28.4	28.9	27.4	27.9	27.8	28.3	28.8
12H 4H	27.3	28.1	27.7	28.4	28.9	27.2	28.0	27.7	28.4	28.8
6H	27.4	28.1	27.9	28.5	28.9	27.4	28.0	27.8	28.4	28.9
8H	27.4	28.0	27.9	28.4	28.9	27.4	27.9	27.9	28.3	28.8
Variations with the observer position at spacings:										
S = 1.0H	+ 0.3 / - 0.3					+ 0.2 / - 0.3				
1.5H	+ 0.2 / - 0.4					+ 0.2 / - 0.4				
2.0H	+ 0.4 / - 0.4					+ 0.4 / - 0.4				

CIE Pub.117, 5500 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 5.9)

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

UTILIZATION FACTORS TABLE

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-44W-SW-40	WEIGHT:
SPEC.:44W 4000K	DIM.: L:1567mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	59	47	40	58	47	40	57	46	40	34
0.80	69	58	50	68	57	50	66	56	50	43
1.00	78	67	60	76	66	60	74	68	59	52
1.25	85	75	68	83	74	68	81	73	67	60
1.50	90	80	74	88	80	73	85	78	72	65
2.00	97	89	83	95	87	82	91	85	80	73
2.50	100	93	87	98	92	87	95	89	85	77
3.00	104	97	92	101	96	91	98	93	89	81
4.00	107	102	98	105	100	97	101	97	94	85
5.00	110	105	102	107	103	100	103	100	97	88
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16


γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

ISOCANDELA DIAGRAM

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-44W-SW-40	WEIGHT:
SPEC.:44W 4000K	DIM.: L:1567mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

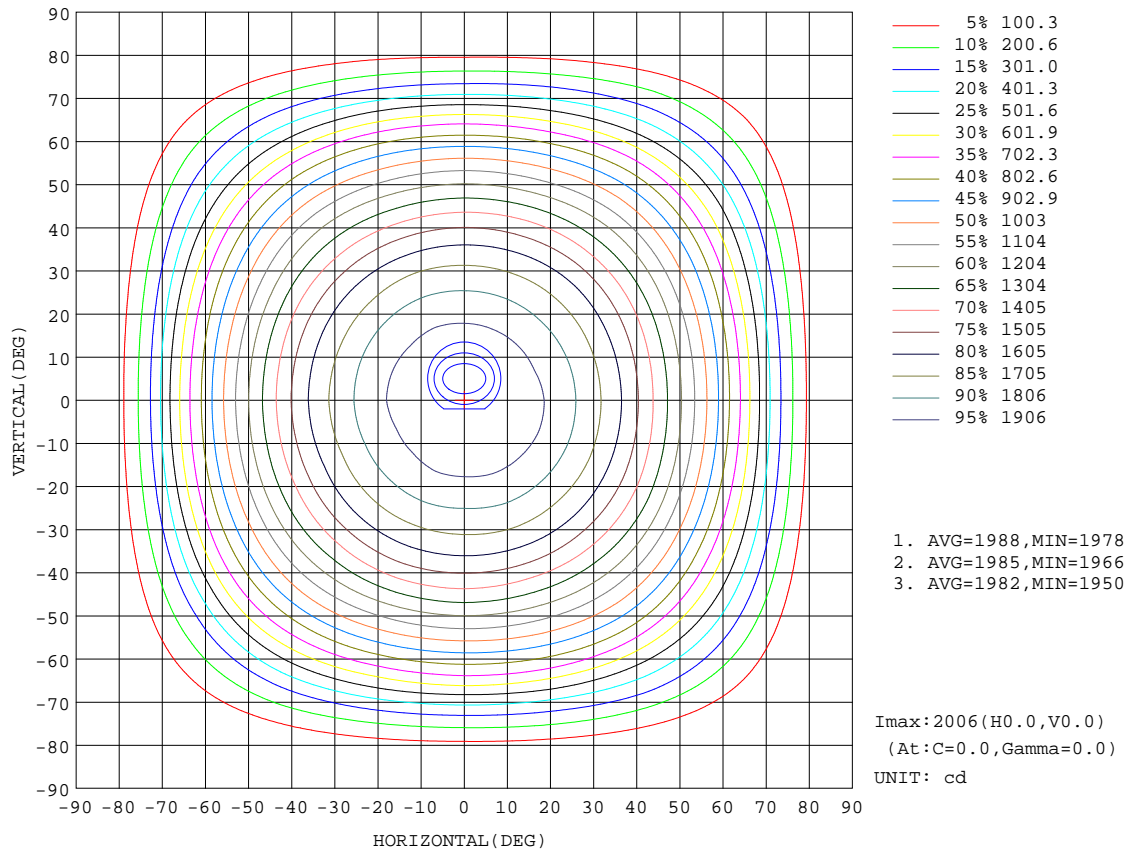

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16


γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

AAI Figure

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-44W-SW-40	WEIGHT:
SPEC.:44W 4000K	DIM.: L:1567mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

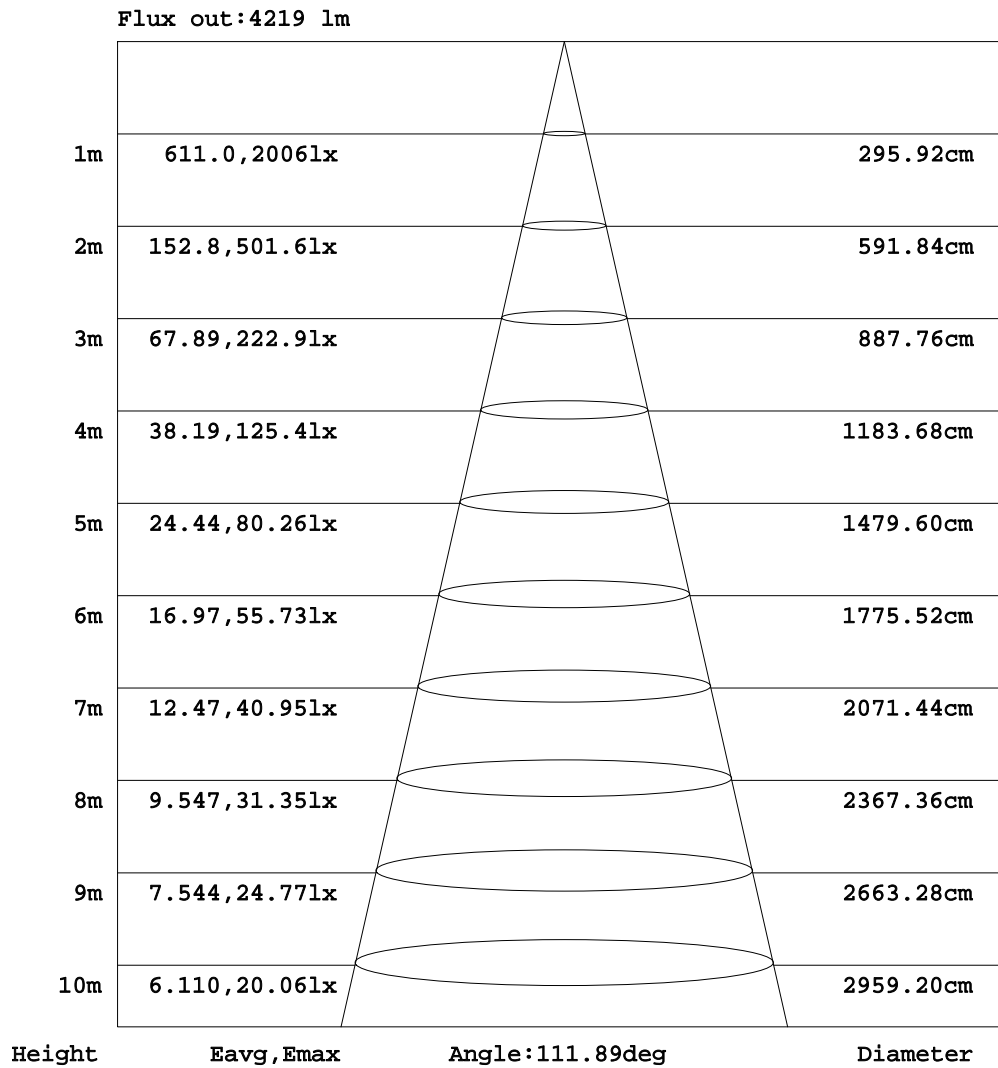

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16


γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

ISOLUX DIAGRAM

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-44W-SW-40	WEIGHT:
SPEC.:44W 4000K	DIM.: L:1567mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

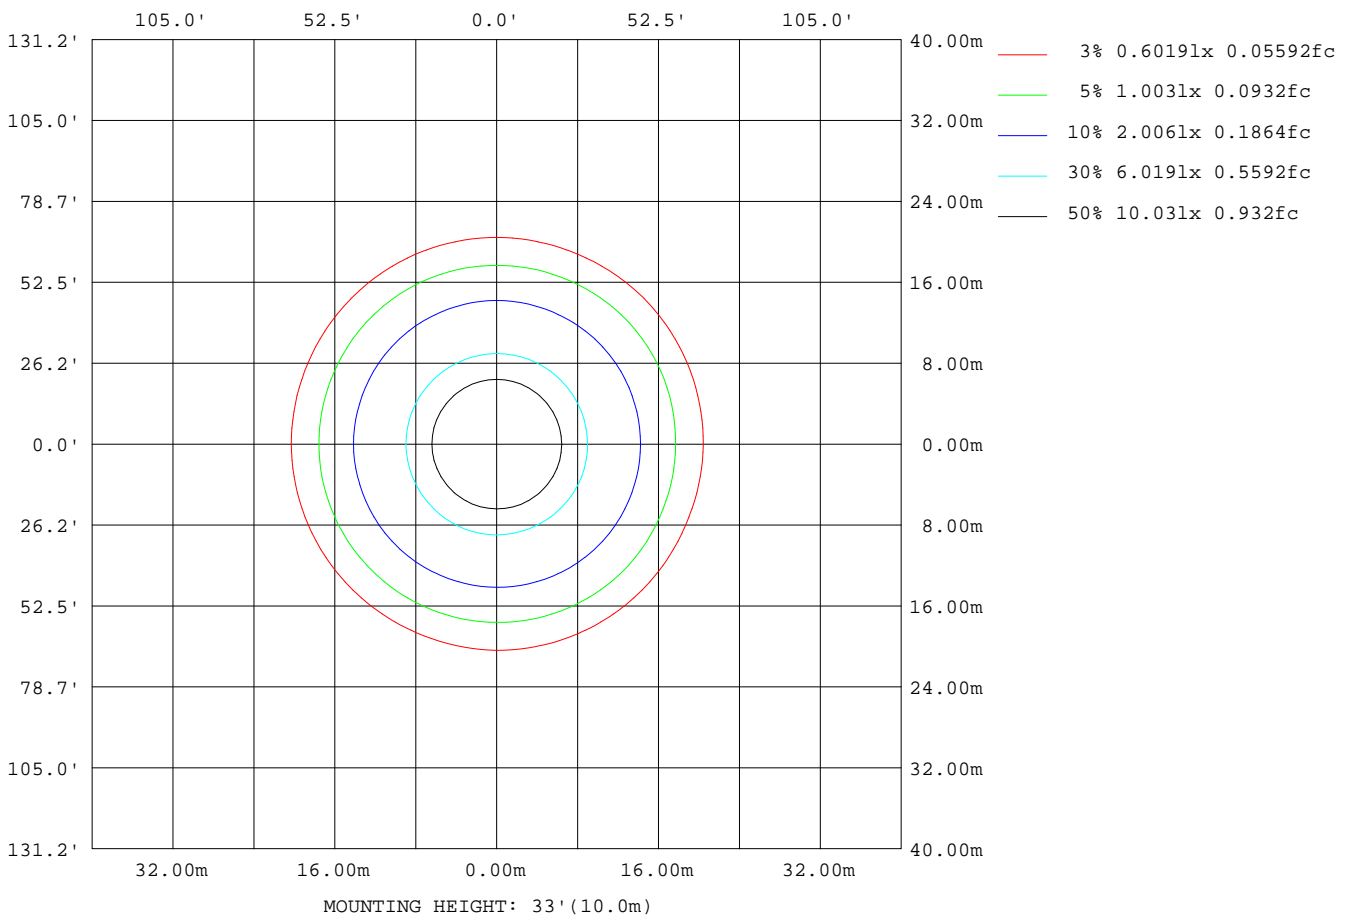


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

Planar Illuminance Curve

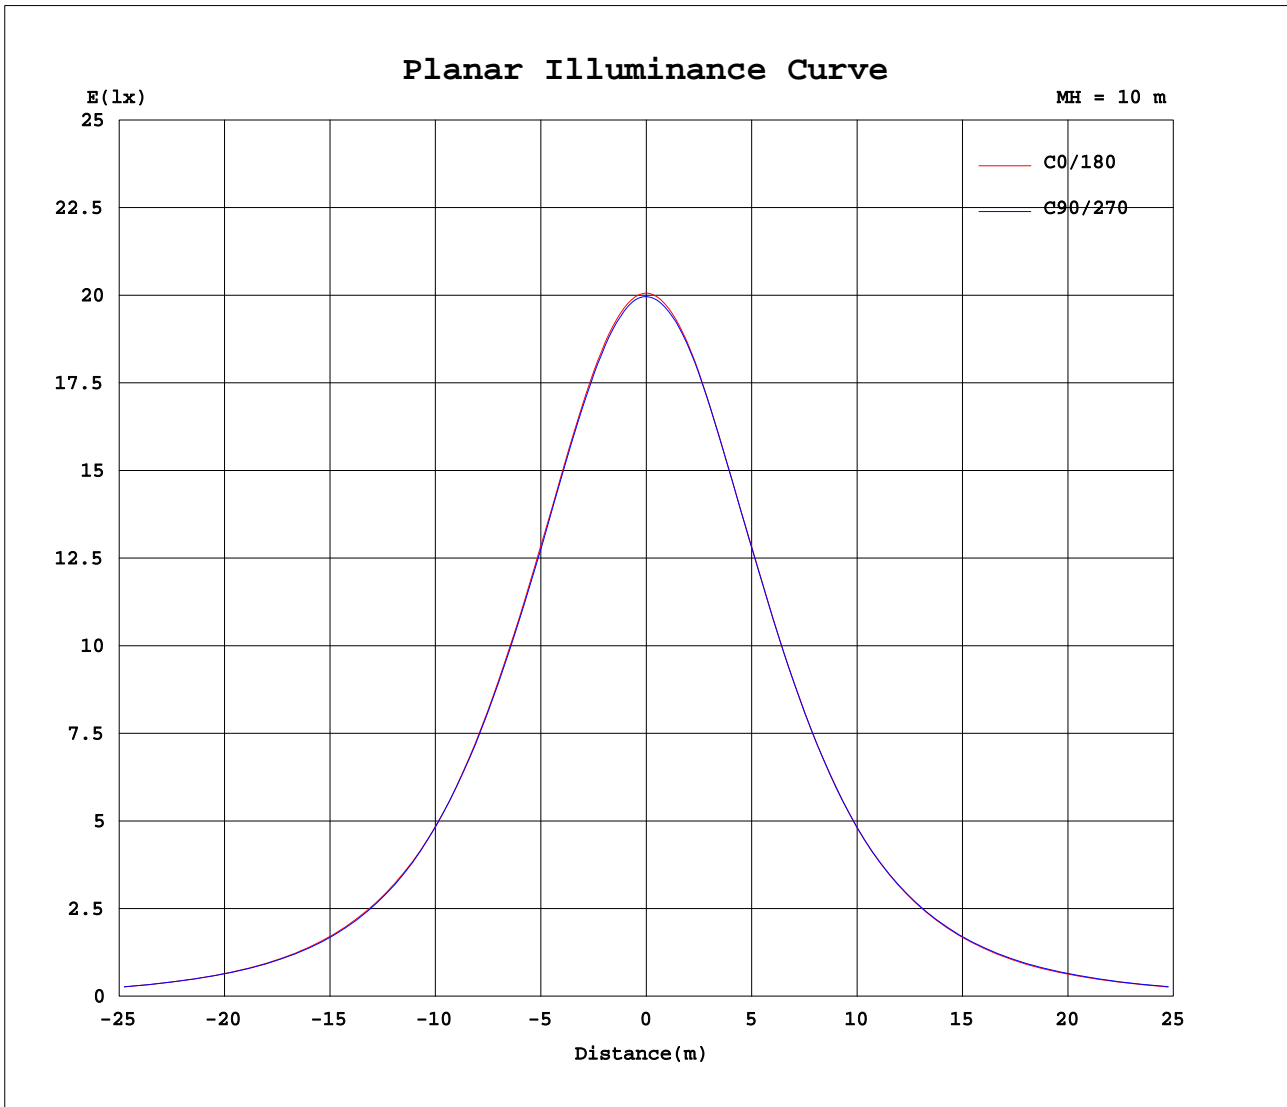

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 24.5DEG
 Operators: William
 Test Date: 2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity: 65.7%
 Test Distance: 26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-44W-SW-40	WEIGHT:
SPEC.:44W 4000K	DIM.: L:1567mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	2006	2003	2001	1999	1996	1995	1994	1992	2006	2003	2001	1999	1996	1995	1994	1992			
5	1999	1996	1996	1994	1990	1989	1986	1986	1999	1995	1993	1992	1990	1988	1987	1986			
10	1979	1978	1978	1975	1970	1969	1964	1966	1978	1975	1971	1973	1972	1970	1968	1967			
15	1943	1943	1940	1938	1932	1933	1928	1929	1939	1937	1934	1939	1936	1934	1932	1931			
20	1889	1890	1887	1885	1879	1881	1872	1870	1881	1881	1880	1884	1880	1879	1878	1881			
25	1818	1820	1817	1816	1807	1810	1806	1806	1814	1814	1814	1815	1811	1811	1810	1814			
30	1737	1738	1734	1735	1726	1725	1722	1720	1734	1728	1727	1733	1731	1730	1730	1733			
35	1639	1637	1634	1633	1629	1626	1621	1617	1630	1629	1626	1626	1628	1628	1632	1634			
40	1515	1516	1507	1507	1508	1506	1495	1495	1509	1506	1500	1501	1507	1505	1509	1511			
45	1368	1375	1363	1359	1366	1359	1347	1349	1359	1358	1354	1353	1362	1363	1362	1367			
50	1216	1217	1210	1203	1203	1195	1193	1195	1204	1198	1205	1203	1210	1206	1213	1215			
55	1048	1044	1047	1040	1032	1025	1026	1022	1032	1027	1036	1037	1044	1041	1051	1049			
60	863	856	865	859	852	844	840	838	841	843	854	859	859	861	874	873			
65	659	648	652	655	657	637	638	641	646	643	647	657	662	659	669	668			
70	440	441	440	436	428	426	423	407	420	428	430	438	441	445	457	458			
75	245	247	245	241	231	230	228	217	221	238	245	244	248	252	265	259			
80	81.8	87.6	85.4	82.7	83.2	78.1	81.2	71.5	77.2	83.4	88.7	92.7	86.0	96.3	99.1	98.4			
85	14.8	13.4	12.7	11.4	10.2	9.95	9.38	9.81	10.5	13.1	13.7	16.9	14.6	15.2	16.1	18.1			
90	0.36	0.31	0.19	0.22	0.18	0.23	0.22	0.18	0.13	1.60	0.13	0.13	0.61	0.04	1.73	0.64			
95	0.13	0.12	0.17	0.18	0.15	0.15	0.14	0.14	0.17	0.51	0.16	0.17	0.13	0.15	0.13	0.17			
100	0.11	0.13	0.16	0.19	0.17	0.18	0.15	0.15	0.39	0.39	0.39	0.39	0.39	0.35	0.35	0.35			
105	0.10	0.14	0.14	0.20	0.19	0.21	0.16	0.16	0.70	0.65	0.65	0.70	0.65	0.70	0.70	0.66			
110	0.09	0.17	0.13	0.21	0.21	0.24	0.17	0.17	1.09	0.96	1.00	1.05	1.05	1.05	1.00	1.00			
115	0.23	0.27	0.26	0.29	0.31	0.22	0.22	0.30	1.44	1.35	1.39	1.40	1.40	1.40	1.39	1.40			
120	0.69	0.57	0.69	0.65	0.61	0.48	0.56	0.52	1.71	1.70	1.63	1.55	1.74	1.70	1.79	1.66			
125	1.04	0.96	0.91	1.13	1.09	1.00	0.86	0.91	1.83	1.83	1.68	1.59	1.82	1.77	1.84	1.83			
130	1.48	1.39	1.39	1.57	1.52	1.39	1.17	1.41	2.09	1.87	1.80	1.70	1.89	1.83	1.92	1.92			
135	2.09	1.78	1.83	2.09	2.05	1.87	1.48	1.75	2.18	1.92	1.87	2.00	2.18	1.96	2.08	2.10			
140	2.73	2.48	2.39	2.83	2.75	2.74	2.13	2.57	2.39	2.18	2.00	2.22	2.27	2.31	2.27	2.27			
145	3.08	2.96	2.87	3.31	3.18	3.09	2.79	2.84	2.61	2.40	2.26	2.62	2.75	2.75	2.53	2.58			
150	3.39	3.44	3.44	3.53	3.49	3.53	3.22	3.10	2.96	2.79	2.70	3.10	3.14	3.14	3.14	2.97			
155	3.61	3.70	3.65	3.71	3.51	3.57	3.58	3.45	3.40	3.27	3.22	3.49	3.36	3.45	3.32	3.45			
160	3.77	3.74	3.79	3.78	3.70	3.71	3.66	3.63	3.61	3.53	3.47	3.66	3.79	3.58	3.61	3.54			
165	4.18	4.05	4.05	4.14	4.18	3.92	3.96	3.97	3.74	3.79	3.70	3.79	3.92	3.84	3.92	3.73			
170	4.26	4.23	4.35	4.49	4.53	4.32	4.22	4.28	4.00	4.05	4.01	4.19	4.18	4.27	4.36	4.04			
175	4.57	4.40	4.66	4.76	4.74	4.49	4.53	4.41	4.44	4.35	4.35	4.54	4.49	4.49	4.49	4.37			
180	4.66	4.44	4.66	4.80	4.67	4.49	4.53	4.41	4.53	4.66	4.44	4.66	4.71	4.71	4.49	4.54			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE