
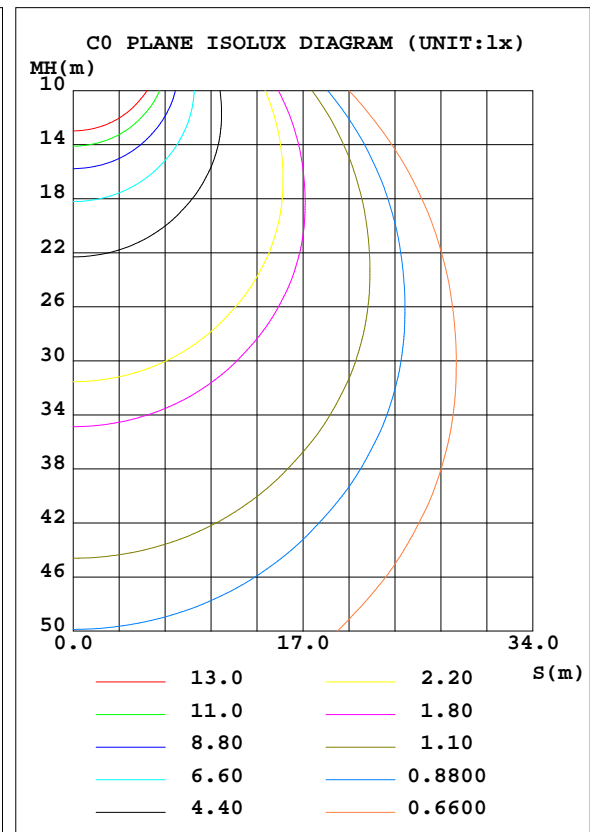


LUMINAIRE PHOTOMETRIC TEST REPORT

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-48W-SW-40	WEIGHT:
SPEC.:48W 4000K	DIM.: L:1567mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 125.00 lm/W			
MODEL	BAWATY-48W-SW-40	I _{max} (cd)	2189	S/MH(C0/180)	1.28
NOMINAL POWER(W)	48	LOR(%)	100.0	S/MH(C90/270)	1.29
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	6000.1	η UP, DN(C0-180)	0.1,49.8
NOMINAL FLUX(lm)	6000	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.1,50.0
LAMPS INSIDE	1	η up(%)	0.2	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	220	η down(%)	99.8	CIBSE SHR MAX	1.35

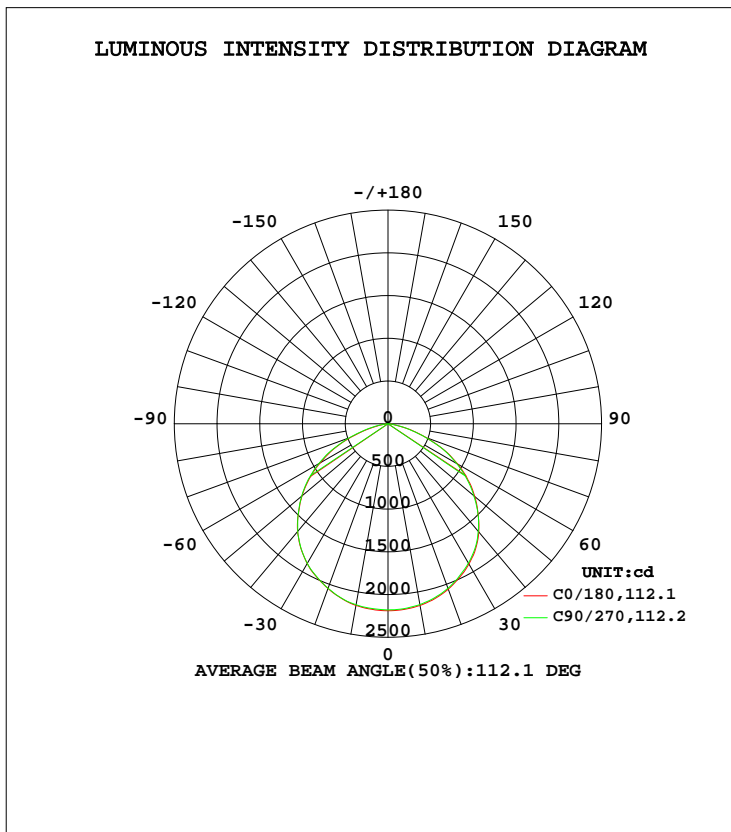

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	2159	2158	2149	2143	2158	2151	2152	2147	0- 10	206.7	206.7	3.45,3.45
20	2061	2059	2050	2043	2053	2051	2051	2049	10- 20	596.0	802.8	13.4,13.4
30	1895	1891	1883	1878	1891	1884	1888	1887	20- 30	911.9	1715	28.6,28.6
40	1653	1645	1645	1631	1646	1636	1644	1646	30- 40	1111	2825	47.1,47.1
50	1327	1320	1313	1301	1313	1314	1320	1324	40- 50	1144	3970	66.2,66.2
60	941.1	943.9	928.9	916.4	918.0	931.2	936.6	953.3	50- 60	1010	4980	83,83
70	479.8	480.2	466.6	461.2	458.5	469.5	481.0	498.2	60- 70	699.5	5679	94.7,94.7
80	89.22	93.15	90.75	88.58	84.18	96.76	93.76	108.1	70- 80	282.9	5962	99.4,99.4
90	0.3902	0.2070	0.1948	0.2376	0.1414	0.1410	0.6623	1.882	80- 90	27.97	5990	99.8,99.8
100	0.1240	0.1711	0.1841	0.1592	0.4300	0.4291	0.4280	0.3803	90-100	0.2685	5990	99.8,99.8
110	0.0985	0.1450	0.2287	0.1829	1.188	1.093	1.142	1.096	100-110	0.4867	5991	99.8,99.8
120	0.7574	0.7572	0.6645	0.6138	1.870	1.773	1.902	1.950	110-120	0.9011	5992	99.9,99.9
130	1.614	1.519	1.662	1.281	2.279	1.963	2.064	2.092	120-130	1.357	5993	99.9,99.9
140	2.980	2.610	2.996	2.328	2.612	2.185	2.476	2.471	130-140	1.661	5995	99.9,99.9
150	3.703	3.751	3.802	3.515	3.230	2.945	3.424	3.421	140-150	1.909	5997	99.9,99.9
160	4.110	4.131	4.042	3.990	3.935	3.789	4.137	3.944	150-160	1.740	5998	100,100
170	4.652	4.747	4.944	4.607	4.368	4.371	4.558	4.751	160-170	1.208	6000	100,100
180	5.080	5.080	5.090	4.941	4.937	4.843	5.136	4.894	170-180	0.4597	6000	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 3404.6 lm

%lum = 56.7%
%lamp = 56.7%

Conical surface Flux(120deg): 4979.8 lm

%lum = 83.0%
%lamp = 83.0%

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:24.5DEG
Operators:William
Test Date:2017-12-16


γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
Humidity:65.7%
Test Distance:26.000m [K=1.4470]
Remarks:

Checker: DENNY

Assessor: JOE

LUMINANCE LIMITATION CURVES

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-48W-SW-40	WEIGHT:
SPEC.:48W 4000K	DIM.: L:1567mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

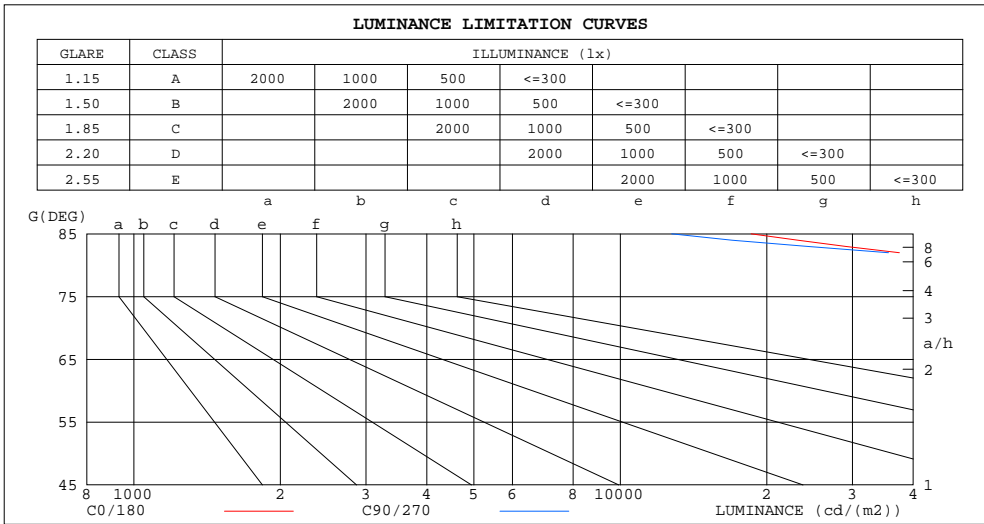

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	18569	12751
80	51381	52260
75	103288	97435
70	140296	136414
65	170185	169582
60	188211	185784
55	199251	196369
50	206397	204192
45	211112	210679

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:


Checker: DENNY

Assessor: JOE

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-48W-SW-40	WEIGHT:
SPEC.:48W 4000K	DIM.: L:1567mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pw																0
pfc																0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.05	1.01	.98	1.03	.99	.96	.99	.96	.93	.95	.92	.90	.91	.89	.88	.86
2.0	.92	.86	.80	.90	.84	.79	.87	.82	.78	.84	.79	.76	.81	.77	.74	.72
3.0	.81	.73	.67	.80	.72	.67	.77	.71	.65	.74	.69	.64	.71	.67	.63	.61
4.0	.72	.64	.57	.71	.63	.57	.68	.61	.56	.66	.60	.55	.64	.59	.54	.52
5.0	.64	.56	.49	.63	.55	.49	.61	.54	.48	.59	.53	.48	.57	.52	.47	.45
6.0	.58	.49	.43	.57	.49	.43	.55	.48	.42	.54	.47	.42	.52	.46	.42	.40
7.0	.53	.44	.38	.52	.44	.38	.50	.43	.37	.49	.42	.37	.47	.41	.37	.35
8.0	.48	.40	.34	.47	.39	.34	.46	.39	.33	.45	.38	.33	.44	.38	.33	.31
9.0	.44	.36	.30	.43	.36	.30	.42	.35	.30	.41	.35	.30	.40	.34	.30	.28
10.0	.41	.33	.28	.40	.33	.27	.39	.32	.27	.38	.32	.27	.37	.31	.27	.25

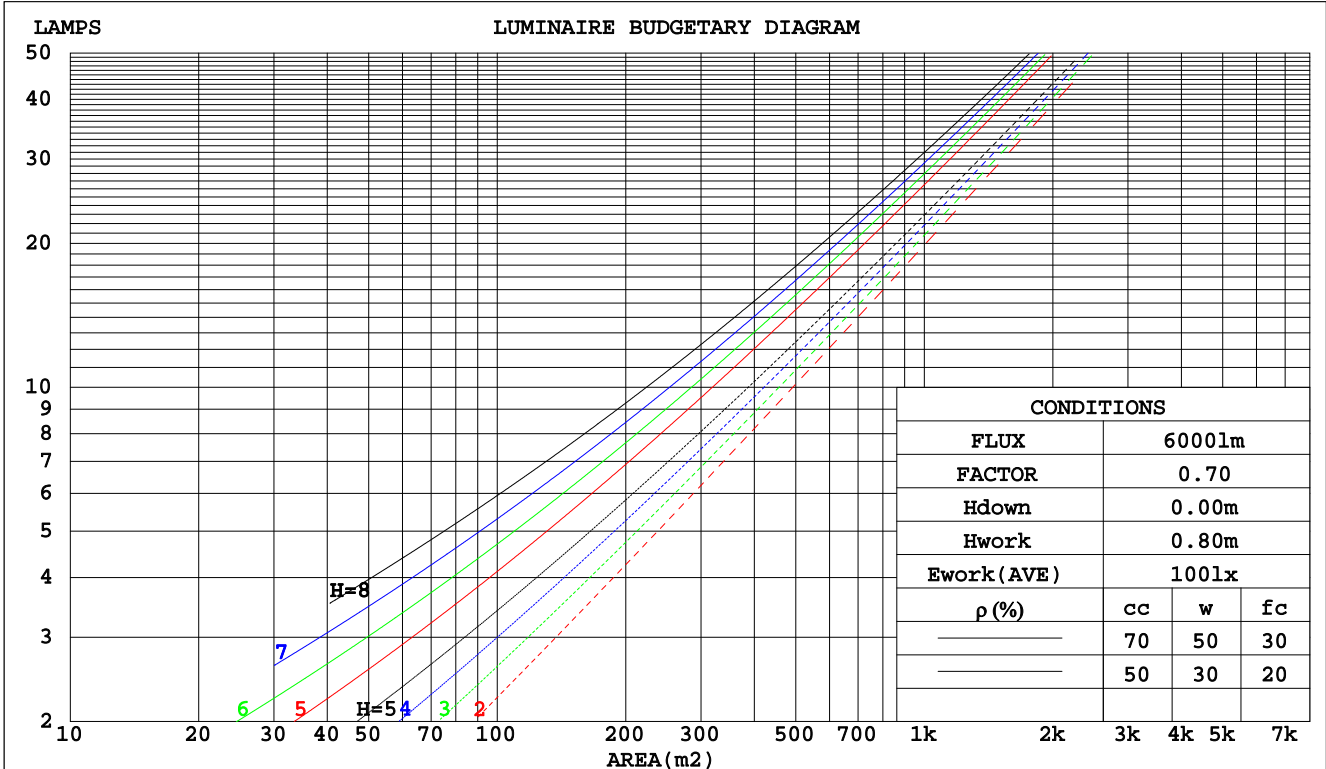

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

WEC AND CCEC

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-48W-SW-40	WEIGHT:
SPEC.:48W 4000K	DIM.: L:1567mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.282	.161	.051	.275	.157	.050	.262	.150	.048	.250	.144	.046	.239	.138	.045	
2.0	.274	.150	.046	.267	.147	.045	.256	.142	.044	.245	.138	.043	.235	.133	.042	
3.0	.257	.137	.041	.252	.135	.041	.242	.131	.040	.232	.127	.039	.223	.124	.038	
4.0	.240	.125	.037	.235	.123	.036	.226	.120	.036	.218	.117	.035	.210	.114	.035	
5.0	.224	.114	.033	.219	.113	.033	.211	.110	.032	.204	.107	.032	.197	.105	.032	
6.0	.208	.105	.030	.205	.103	.030	.197	.101	.029	.191	.099	.029	.184	.097	.029	
7.0	.195	.096	.027	.191	.095	.027	.185	.093	.027	.179	.092	.027	.173	.090	.026	
8.0	.182	.089	.025	.179	.088	.025	.174	.087	.025	.168	.085	.025	.163	.084	.024	
9.0	.171	.083	.023	.169	.082	.023	.163	.081	.023	.159	.079	.023	.154	.078	.023	
10.0	.161	.077	.021	.159	.077	.021	.154	.076	.021	.150	.074	.021	.146	.073	.021	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.180	.158	.138	.154	.135	.119	.105	.093	.082	.061	.054	.048	.019	.017	.015	
2.0	.171	.133	.101	.147	.115	.088	.100	.079	.061	.058	.046	.036	.019	.015	.012	
3.0	.163	.116	.077	.140	.100	.067	.096	.069	.047	.056	.040	.028	.018	.013	.009	
4.0	.156	.102	.061	.134	.088	.053	.092	.061	.037	.053	.036	.022	.017	.012	.007	
5.0	.149	.092	.049	.128	.079	.043	.088	.055	.030	.051	.033	.018	.016	.011	.006	
6.0	.142	.083	.041	.122	.072	.036	.084	.050	.025	.049	.030	.015	.016	.010	.005	
7.0	.135	.076	.035	.116	.066	.031	.080	.046	.022	.047	.027	.013	.015	.009	.004	
8.0	.129	.071	.030	.111	.061	.027	.077	.043	.019	.045	.025	.011	.014	.008	.004	
9.0	.123	.066	.027	.106	.057	.023	.073	.040	.017	.043	.024	.010	.014	.008	.003	
10.0	.117	.061	.024	.101	.053	.021	.070	.037	.015	.041	.022	.009	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

UGR(Unified Glare Rating) Table

NAME: LED TRI-PROOF LIGHT		TYPE:BAWATY-48W-SW-40				WEIGHT:				
SPEC.:48W 4000K		DIM.: L:1567mm				SERIAL No.:				
MFR.: DIMON TECHNOLOGY LTD		SUR.:				Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	25.1	26.6	25.4	26.8	27.0	25.1	26.6	25.4	26.8	27.0
3H	26.2	27.6	26.5	27.8	28.1	26.2	27.6	26.5	27.8	28.0
4H	26.5	27.8	26.8	28.1	28.3	26.4	27.7	26.8	28.0	28.2
6H	26.6	27.8	26.9	28.0	28.3	26.5	27.7	26.8	28.0	28.3
8H	26.5	27.7	26.9	28.0	28.3	26.5	27.6	26.8	27.9	28.2
12H	26.5	27.6	26.8	27.9	28.2	26.4	27.5	26.8	27.8	28.1
4H 2H	25.6	26.9	25.9	27.2	27.4	25.6	26.9	25.9	27.2	27.4
3H	26.9	28.0	27.2	28.3	28.6	26.8	28.0	27.2	28.3	28.6
4H	27.2	28.3	27.6	28.6	28.9	27.2	28.2	27.5	28.5	28.8
6H	27.3	28.2	27.7	28.6	29.0	27.3	28.2	27.7	28.5	28.9
8H	27.3	28.2	27.7	28.5	28.9	27.2	28.1	27.7	28.4	28.8
12H	27.3	28.0	27.7	28.4	28.8	27.2	28.0	27.6	28.4	28.8
8H 4H	27.3	28.2	27.7	28.5	28.9	27.3	28.1	27.7	28.5	28.9
6H	27.5	28.2	27.9	28.6	29.0	27.4	28.1	27.8	28.5	28.9
8H	27.5	28.1	27.9	28.5	28.9	27.4	28.0	27.9	28.4	28.9
12H	27.4	28.0	27.9	28.4	28.9	27.4	27.9	27.8	28.3	28.8
12H 4H	27.3	28.1	27.7	28.4	28.9	27.2	28.0	27.7	28.4	28.8
6H	27.4	28.1	27.9	28.5	28.9	27.4	28.0	27.8	28.4	28.9
8H	27.4	28.0	27.9	28.4	28.9	27.4	27.9	27.9	28.3	28.8
Variations with the observer position at spacings:										
S = 1.0H	+ 0.3 / - 0.3					+ 0.2 / - 0.3				
1.5H	+ 0.2 / - 0.4					+ 0.2 / - 0.4				
2.0H	+ 0.4 / - 0.4					+ 0.4 / - 0.4				

CIE Pub.117, 6000 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 6.2)

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

UTILIZATION FACTORS TABLE

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-48W-SW-40	WEIGHT:
SPEC.:48W 4000K	DIM.: L:1567mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	59	47	40	58	47	40	57	46	40	34
0.80	69	58	50	68	57	50	66	56	50	43
1.00	78	67	60	76	66	60	74	68	59	52
1.25	85	75	68	83	74	68	81	73	67	60
1.50	90	80	74	88	80	73	85	78	72	65
2.00	97	89	83	95	87	82	91	85	80	73
2.50	100	93	87	98	92	87	95	89	85	77
3.00	104	97	92	101	96	91	98	93	89	81
4.00	107	102	98	105	100	97	101	97	94	85
5.00	110	105	102	107	103	100	103	100	97	88
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16


γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

ISOCANDELA DIAGRAM

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-48W-SW-40	WEIGHT:
SPEC.:48W 4000K	DIM.: L:1567mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

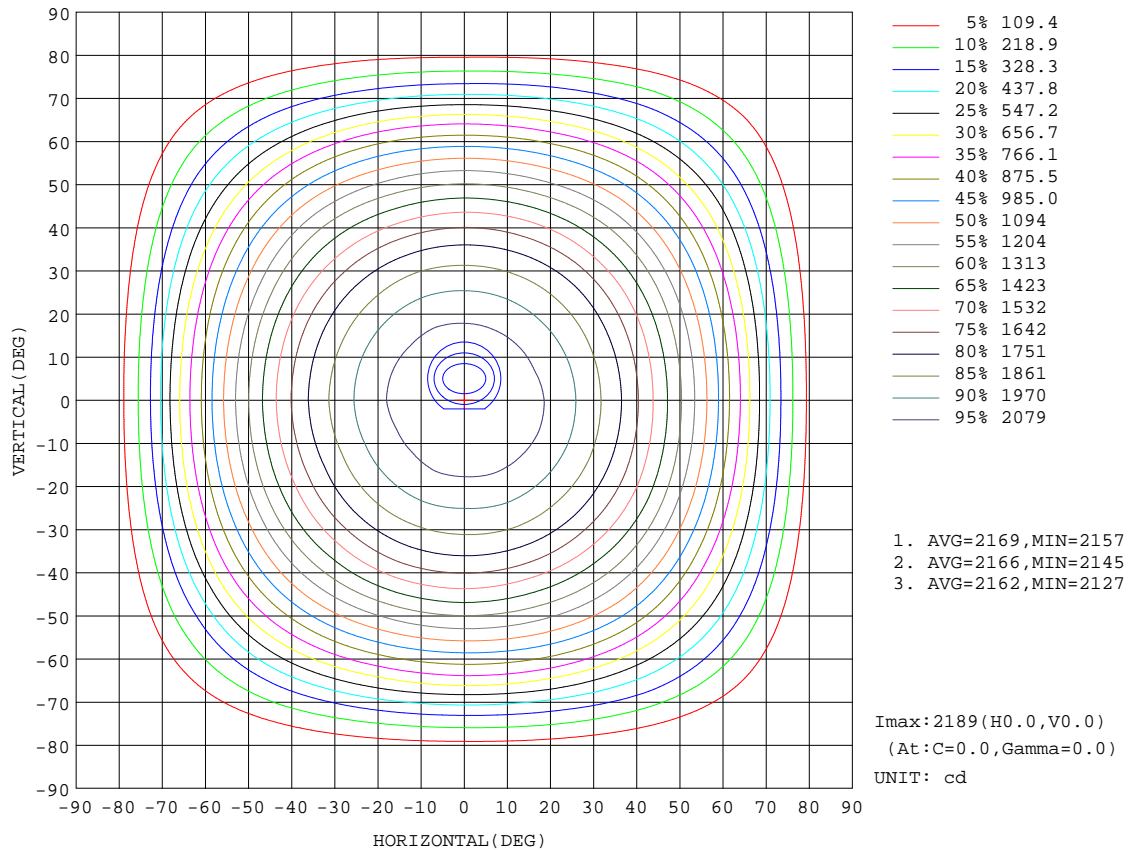

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 24.5DEG
 Operators: William
 Test Date: 2017-12-16


γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity: 65.7%
 Test Distance: 26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

AAI Figure

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-48W-SW-40	WEIGHT:
SPEC.:48W 4000K	DIM.: L:1567mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

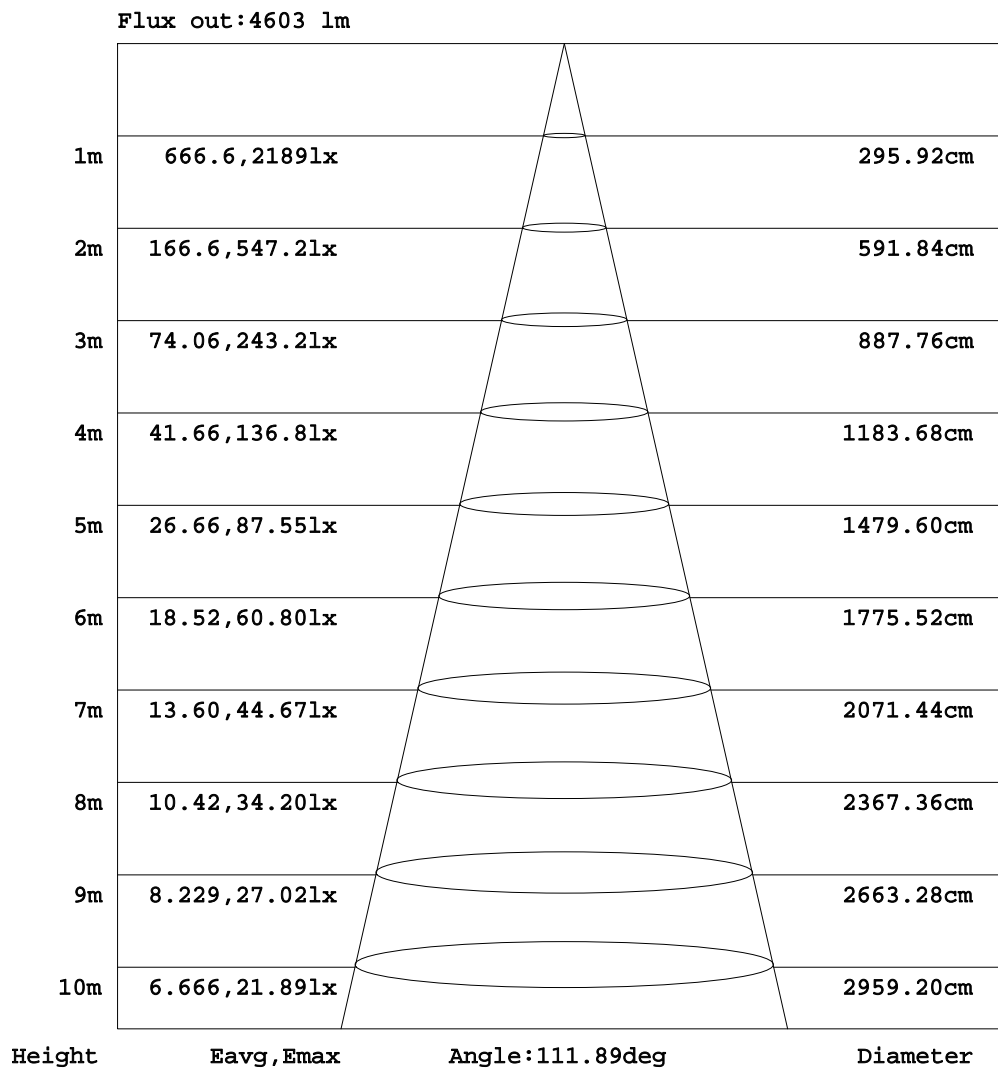

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16


γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

ISOLUX DIAGRAM

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-48W-SW-40	WEIGHT:
SPEC.:48W 4000K	DIM.: L:1567mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

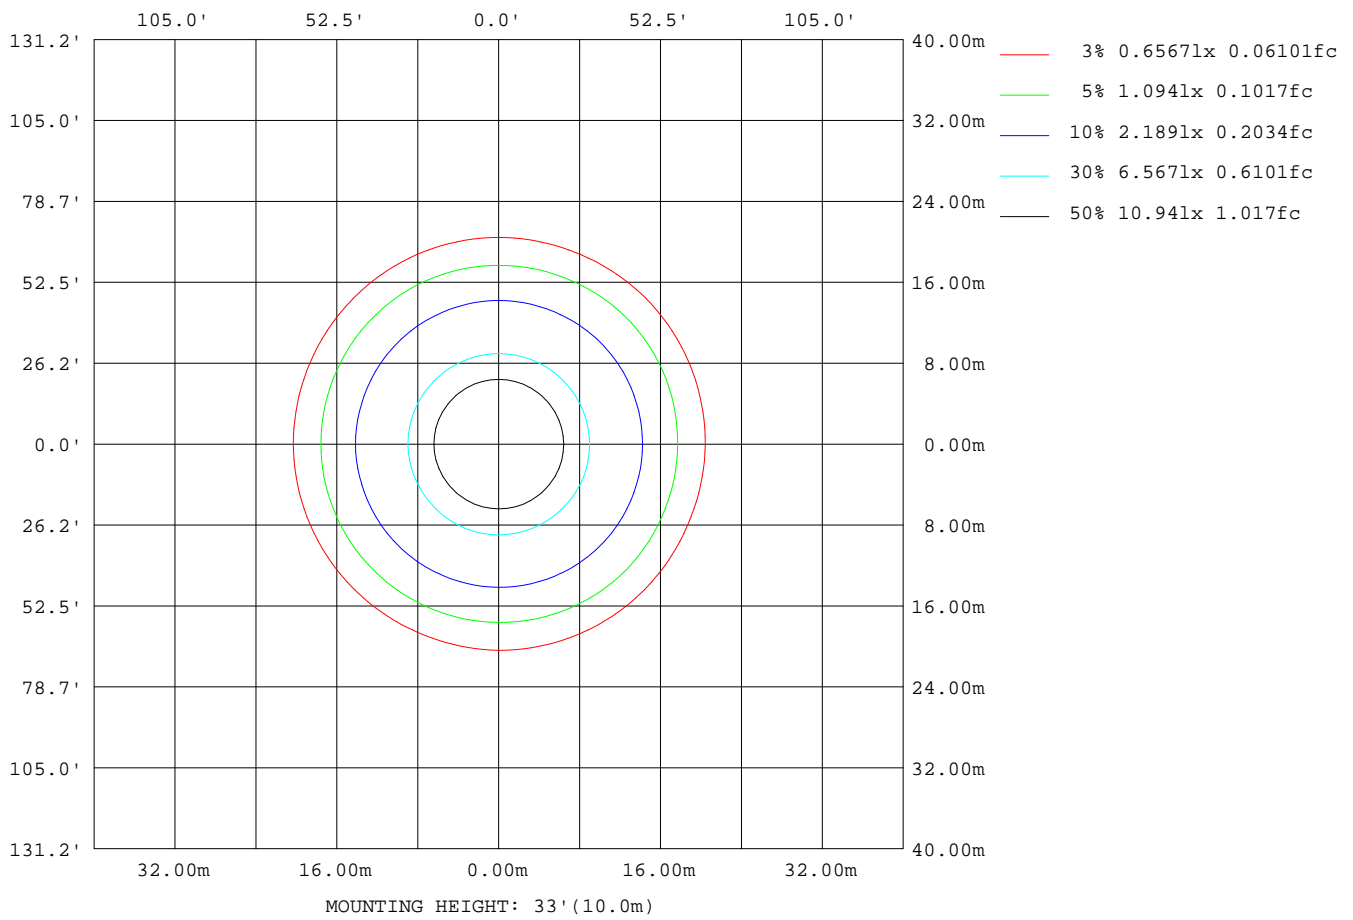


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

Planar Illuminance Curve

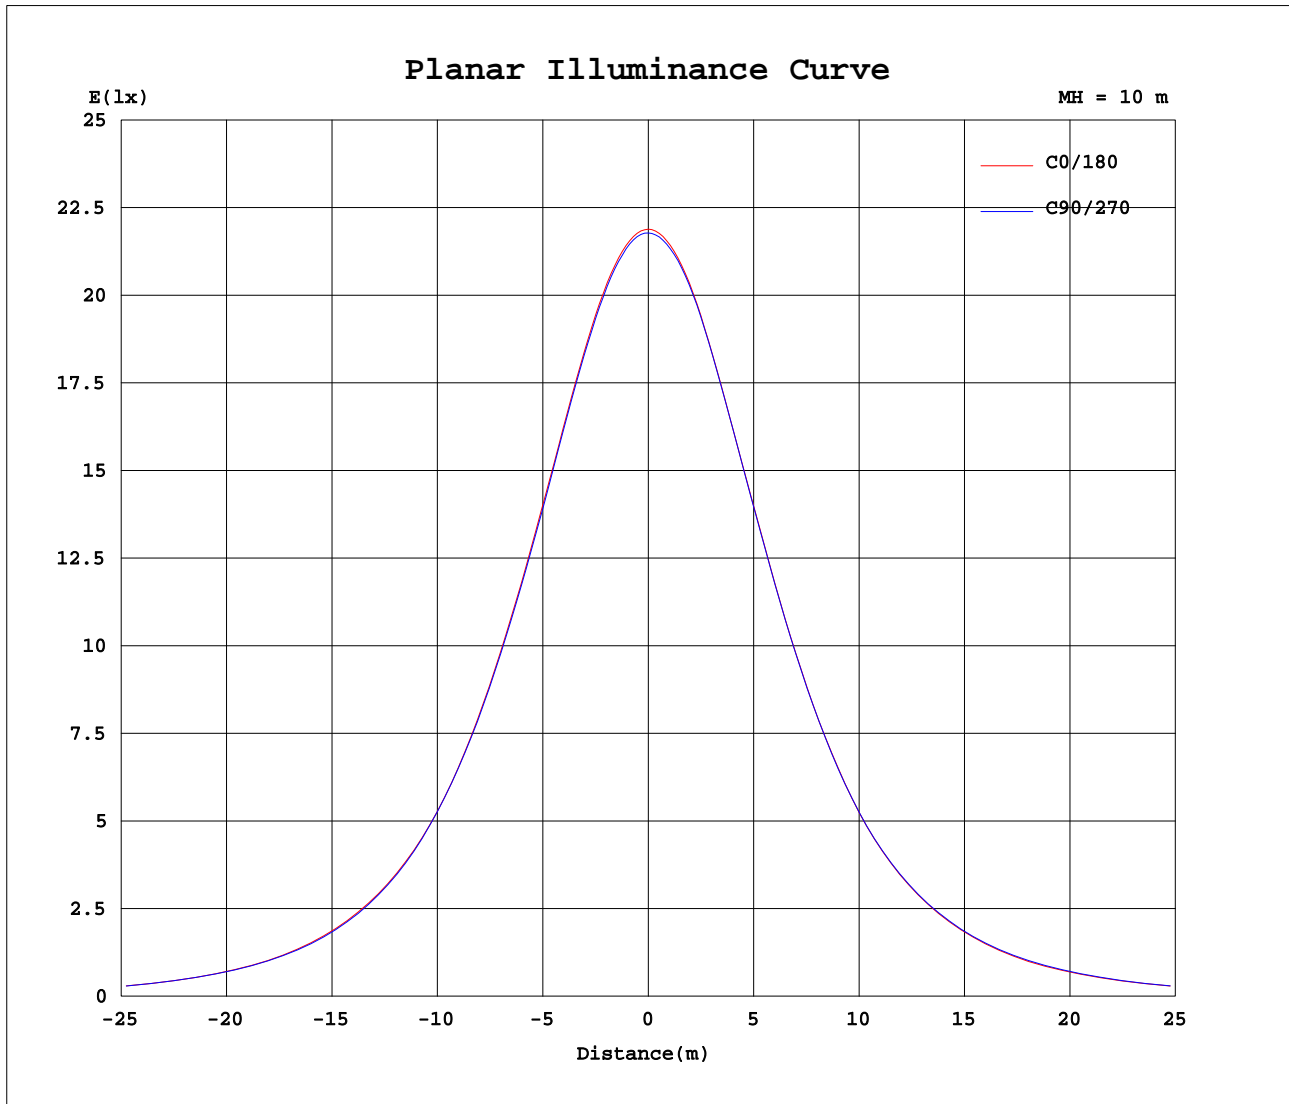

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 24.5DEG
 Operators: William
 Test Date: 2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity: 65.7%
 Test Distance: 26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-48W-SW-40	WEIGHT:
SPEC.:48W 4000K	DIM.: L:1567mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	2189	2186	2183	2181	2178	2176	2175	2173	2189	2186	2183	2181	2178	2176	2175	2173			
5	2181	2178	2178	2176	2171	2170	2167	2167	2180	2176	2175	2173	2170	2169	2168	2166			
10	2159	2158	2158	2155	2149	2148	2143	2145	2158	2155	2151	2152	2152	2149	2147	2146			
15	2119	2119	2117	2114	2107	2109	2103	2105	2115	2113	2110	2115	2112	2109	2108	2107			
20	2061	2062	2059	2057	2050	2052	2043	2041	2053	2052	2051	2056	2051	2049	2049	2051			
25	1984	1985	1982	1981	1971	1974	1971	1971	1979	1979	1979	1980	1976	1976	1975	1979			
30	1895	1896	1891	1893	1883	1882	1878	1877	1891	1885	1884	1890	1888	1888	1887	1891			
35	1788	1786	1782	1782	1777	1774	1768	1764	1779	1777	1774	1773	1777	1776	1780	1782			
40	1653	1654	1645	1644	1645	1643	1631	1631	1646	1643	1636	1637	1644	1642	1646	1649			
45	1493	1500	1487	1483	1490	1483	1470	1472	1483	1482	1477	1476	1485	1487	1486	1491			
50	1327	1328	1320	1313	1313	1304	1301	1304	1313	1306	1314	1312	1320	1316	1324	1325			
55	1143	1139	1143	1134	1126	1119	1120	1115	1126	1121	1131	1132	1139	1136	1147	1144			
60	941	934	944	937	929	920	916	914	918	919	931	937	937	939	953	952			
65	719	707	712	714	717	694	696	700	704	702	706	717	723	719	730	729			
70	480	481	480	476	467	464	461	444	459	467	469	478	481	486	498	500			
75	267	269	267	263	252	251	248	237	241	260	268	266	270	275	289	283			
80	89.2	95.5	93.2	90.2	90.7	85.2	88.6	78.0	84.2	91.0	96.8	101	93.8	105	108	107			
85	16.2	14.6	13.8	12.4	11.1	10.9	10.2	10.7	11.5	14.3	15.0	18.4	16.0	16.5	17.5	19.8			
90	0.39	0.34	0.21	0.24	0.19	0.25	0.24	0.19	0.14	1.75	0.14	0.14	0.66	0.05	1.88	0.70			
95	0.14	0.13	0.18	0.20	0.16	0.16	0.15	0.15	0.19	0.56	0.17	0.19	0.14	0.17	0.14	0.19			
100	0.12	0.14	0.17	0.21	0.18	0.19	0.16	0.16	0.43	0.43	0.43	0.43	0.43	0.38	0.38	0.38			
105	0.11	0.16	0.16	0.22	0.21	0.23	0.17	0.17	0.76	0.71	0.71	0.76	0.71	0.76	0.76	0.71			
110	0.10	0.18	0.15	0.23	0.23	0.26	0.18	0.19	1.19	1.04	1.09	1.14	1.14	1.15	1.10	1.10			
115	0.25	0.29	0.28	0.31	0.33	0.24	0.24	0.33	1.57	1.47	1.52	1.52	1.53	1.52	1.52	1.53			
120	0.76	0.62	0.76	0.71	0.66	0.52	0.61	0.57	1.87	1.85	1.77	1.69	1.90	1.86	1.95	1.81			
125	1.14	1.04	0.99	1.24	1.19	1.09	0.94	1.00	2.00	2.00	1.83	1.73	1.98	1.93	2.01	2.00			
130	1.61	1.52	1.52	1.71	1.66	1.52	1.28	1.54	2.28	2.04	1.96	1.86	2.06	2.00	2.09	2.10			
135	2.27	1.95	1.99	2.28	2.23	2.04	1.61	1.90	2.38	2.09	2.04	2.18	2.38	2.14	2.27	2.29			
140	2.98	2.71	2.61	3.09	3.00	2.99	2.33	2.80	2.61	2.38	2.18	2.43	2.48	2.52	2.47	2.48			
145	3.36	3.23	3.13	3.61	3.47	3.38	3.04	3.10	2.85	2.61	2.47	2.85	3.00	3.00	2.76	2.81			
150	3.70	3.75	3.75	3.85	3.80	3.85	3.52	3.38	3.23	3.04	2.94	3.38	3.42	3.43	3.42	3.24			
155	3.94	4.04	3.98	4.04	3.83	3.89	3.90	3.76	3.70	3.56	3.51	3.81	3.66	3.76	3.62	3.76			
160	4.11	4.08	4.13	4.13	4.04	4.04	3.99	3.96	3.93	3.85	3.79	4.00	4.14	3.90	3.94	3.86			
165	4.56	4.42	4.41	4.52	4.56	4.28	4.32	4.33	4.08	4.13	4.03	4.14	4.28	4.19	4.28	4.07			
170	4.65	4.61	4.75	4.90	4.94	4.71	4.61	4.67	4.37	4.42	4.37	4.57	4.56	4.66	4.75	4.41			
175	4.98	4.80	5.08	5.19	5.17	4.90	4.94	4.81	4.84	4.75	4.75	4.95	4.90	4.90	4.89	4.76			
180	5.08	4.84	5.08	5.23	5.09	4.90	4.94	4.81	4.94	5.08	4.84	5.09	5.14	5.14	4.89	4.95			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE