
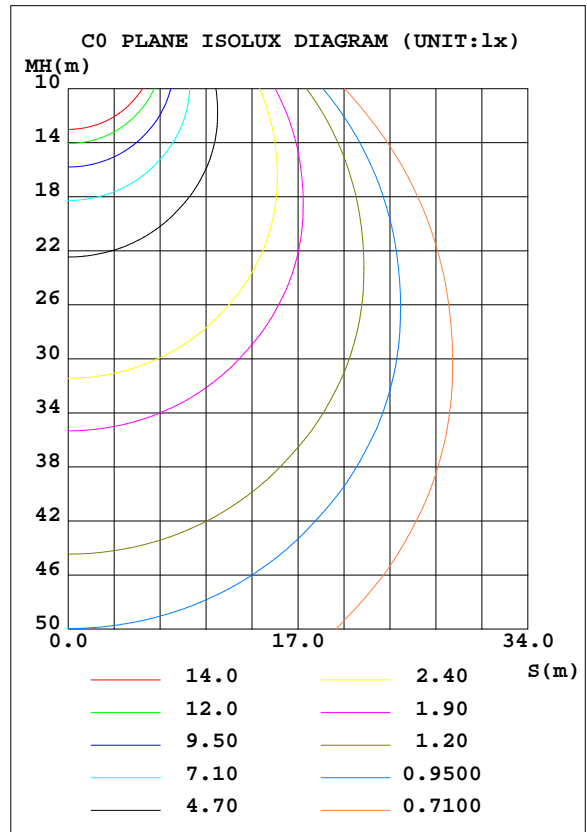


LUMINAIRE PHOTOMETRIC TEST REPORT

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-52W-SW-40	WEIGHT:
SPEC.:52W 4000K	DIM.: L:1567mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 125.00 lm/W			
MODEL	BAWATY-52W-SW-40	Imax(cd)	2371	S/MH(C0/180)	1.28
NOMINAL POWER(W)	52	LOR(%)	100.0	S/MH(C90/270)	1.29
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	6500.2	η UP, DN(C0-180)	0.1,49.8
NOMINAL FLUX(lm)	6500	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.1,50.0
LAMPS INSIDE	1	η up(%)	0.2	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	220	η down(%)	99.8	CIBSE SHR MAX	1.35

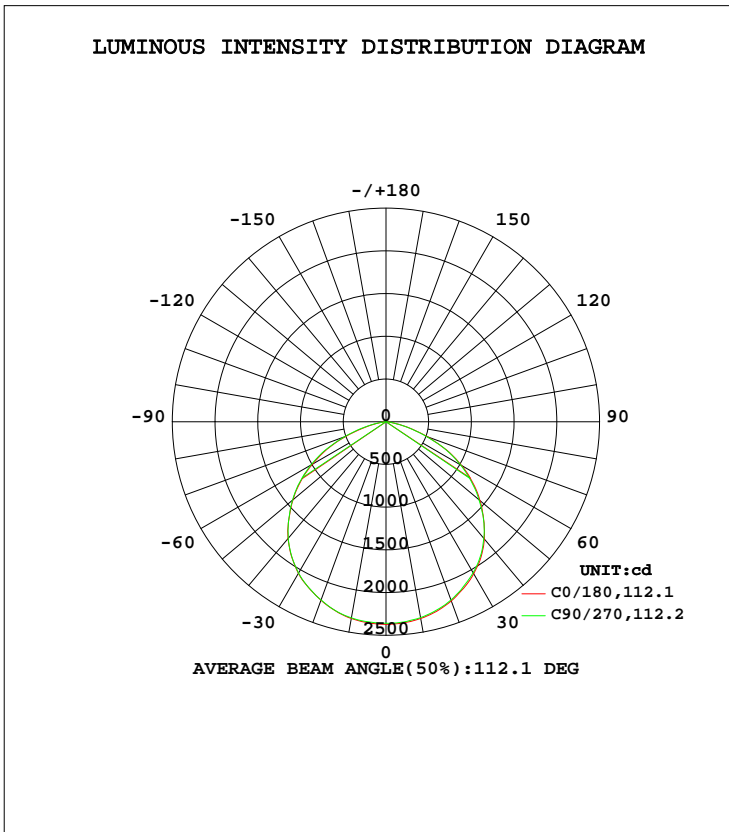

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	2339	2338	2328	2322	2338	2330	2331	2326	0- 10	224.0	224.0	3.45,3.45
20	2233	2231	2221	2213	2224	2222	2222	2220	10- 20	645.7	869.7	13.4,13.4
30	2053	2049	2040	2035	2049	2041	2046	2044	20- 30	987.9	1858	28.6,28.6
40	1790	1782	1782	1767	1783	1773	1781	1783	30- 40	1203	3061	47.1,47.1
50	1437	1430	1422	1410	1422	1424	1430	1434	40- 50	1240	4301	66.2,66.2
60	1019	1023	1006	992.8	994.5	1009	1015	1033	50- 60	1094	5395	83,83
70	519.8	520.2	505.4	499.7	496.8	508.6	521.1	539.7	60- 70	757.8	6153	94.7,94.7
80	96.66	100.9	98.31	95.96	91.20	104.8	101.6	117.1	70- 80	306.4	6459	99.4,99.4
90	0.4227	0.2242	0.2111	0.2573	0.1532	0.1528	0.7175	2.039	80- 90	30.30	6489	99.8,99.8
100	0.1343	0.1853	0.1994	0.1725	0.4659	0.4649	0.4637	0.4120	90-100	0.2909	6490	99.8,99.8
110	0.1067	0.1571	0.2478	0.1982	1.287	1.184	1.237	1.188	100-110	0.5273	6490	99.8,99.8
120	0.8205	0.8203	0.7198	0.6649	2.026	1.920	2.061	2.113	110-120	0.9761	6491	99.9,99.9
130	1.748	1.646	1.801	1.388	2.469	2.126	2.236	2.266	120-130	1.470	6493	99.9,99.9
140	3.228	2.828	3.245	2.522	2.830	2.367	2.682	2.677	130-140	1.800	6494	99.9,99.9
150	4.012	4.063	4.119	3.808	3.499	3.190	3.709	3.706	140-150	2.068	6496	99.9,99.9
160	4.453	4.475	4.378	4.323	4.262	4.105	4.482	4.272	150-160	1.885	6498	100,100
170	5.040	5.143	5.356	4.991	4.732	4.736	4.938	5.147	160-170	1.309	6500	100,100
180	5.503	5.504	5.514	5.353	5.349	5.247	5.564	5.301	170-180	0.4980	6500	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 3688.3 lm

%lum = 56.7%
%lamp = 56.7%

Conical surface Flux(120deg): 5394.8 lm

%lum = 83.0%
%lamp = 83.0%

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:24.5DEG
Operators:William
Test Date:2017-12-16


γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
Humidity:65.7%
Test Distance:26.000m [K=1.4470]
Remarks:

Checker: DENNY

Assessor: JOE

LUMINANCE LIMITATION CURVES

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-52W-SW-40	WEIGHT:
SPEC.:52W 4000K	DIM.: L:1567mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

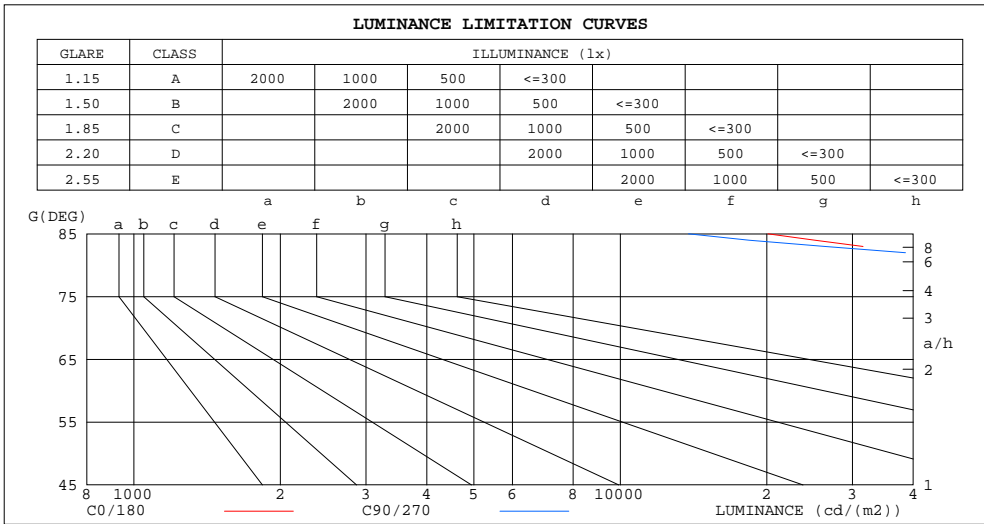

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	20116	13814
80	55663	56615
75	111895	105554
70	151987	147781
65	184367	183714
60	203895	201266
55	215855	212733
50	223597	221208
45	228705	228236

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:


Checker: DENNY

Assessor: JOE

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-52W-SW-40	WEIGHT:
SPEC.:52W 4000K	DIM.: L:1567mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pw																0
pfc																0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.05	1.01	.98	1.03	.99	.96	.99	.96	.93	.95	.92	.90	.91	.89	.88	.86
2.0	.92	.86	.80	.90	.84	.79	.87	.82	.78	.84	.79	.76	.81	.77	.74	.72
3.0	.81	.73	.67	.80	.72	.67	.77	.71	.65	.74	.69	.64	.71	.67	.63	.61
4.0	.72	.64	.57	.71	.63	.57	.68	.61	.56	.66	.60	.55	.64	.59	.54	.52
5.0	.64	.56	.49	.63	.55	.49	.61	.54	.48	.59	.53	.48	.57	.52	.47	.45
6.0	.58	.49	.43	.57	.49	.43	.55	.48	.42	.54	.47	.42	.52	.46	.42	.40
7.0	.53	.44	.38	.52	.44	.38	.50	.43	.37	.49	.42	.37	.47	.41	.37	.35
8.0	.48	.40	.34	.47	.39	.34	.46	.39	.33	.45	.38	.33	.44	.38	.33	.31
9.0	.44	.36	.30	.43	.36	.30	.42	.35	.30	.41	.35	.30	.40	.34	.30	.28
10.0	.41	.33	.28	.40	.33	.27	.39	.32	.27	.38	.32	.27	.37	.31	.27	.25

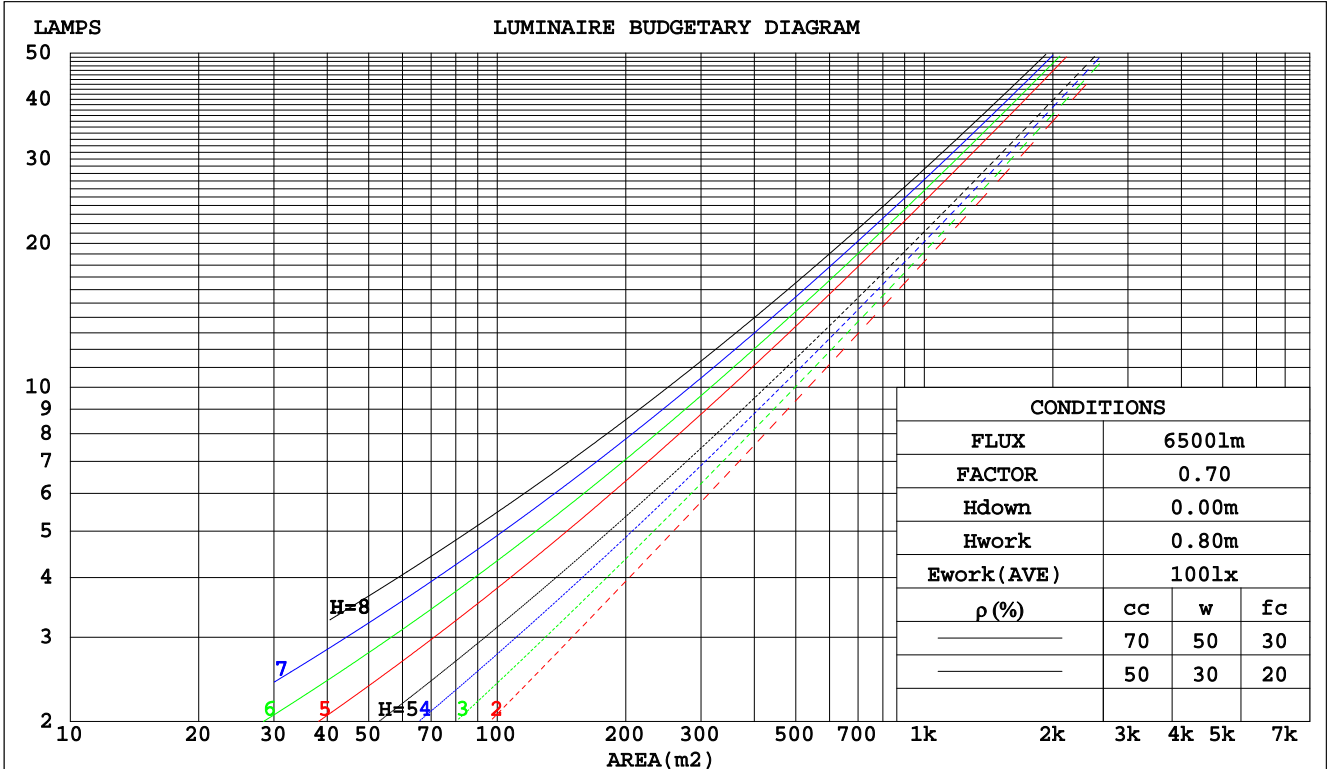

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

WEC AND CCEC

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-52W-SW-40	WEIGHT:
SPEC.:52W 4000K	DIM.: L:1567mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.282	.161	.051	.275	.157	.050	.262	.150	.048	.250	.144	.046	.239	.138	.045	
2.0	.274	.150	.046	.267	.147	.045	.256	.142	.044	.245	.138	.043	.235	.133	.042	
3.0	.257	.137	.041	.252	.135	.041	.242	.131	.040	.232	.127	.039	.223	.124	.038	
4.0	.240	.125	.037	.235	.123	.036	.226	.120	.036	.218	.117	.035	.210	.114	.035	
5.0	.224	.114	.033	.219	.113	.033	.211	.110	.032	.204	.107	.032	.197	.105	.032	
6.0	.208	.105	.030	.205	.103	.030	.197	.101	.029	.191	.099	.029	.184	.097	.029	
7.0	.195	.096	.027	.191	.095	.027	.185	.093	.027	.179	.092	.027	.173	.090	.026	
8.0	.182	.089	.025	.179	.088	.025	.174	.087	.025	.168	.085	.025	.163	.084	.024	
9.0	.171	.083	.023	.169	.082	.023	.163	.081	.023	.159	.079	.023	.154	.078	.023	
10.0	.161	.077	.021	.159	.077	.021	.154	.076	.021	.150	.074	.021	.146	.073	.021	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.180	.158	.138	.154	.135	.119	.105	.093	.082	.061	.054	.048	.019	.017	.015	
2.0	.171	.133	.101	.147	.115	.088	.100	.079	.061	.058	.046	.036	.019	.015	.012	
3.0	.163	.116	.077	.140	.100	.067	.096	.069	.047	.056	.040	.028	.018	.013	.009	
4.0	.156	.102	.061	.134	.088	.053	.092	.061	.037	.053	.036	.022	.017	.012	.007	
5.0	.149	.092	.049	.128	.079	.043	.088	.055	.030	.051	.033	.018	.016	.011	.006	
6.0	.142	.083	.041	.122	.072	.036	.084	.050	.025	.049	.030	.015	.016	.010	.005	
7.0	.135	.076	.035	.116	.066	.031	.080	.046	.022	.047	.027	.013	.015	.009	.004	
8.0	.129	.071	.030	.111	.061	.027	.077	.043	.019	.045	.025	.011	.014	.008	.004	
9.0	.123	.066	.027	.106	.057	.023	.073	.040	.017	.043	.024	.010	.014	.008	.003	
10.0	.117	.061	.024	.101	.053	.021	.070	.037	.015	.041	.022	.009	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

UGR(Unified Glare Rating) Table

NAME: LED TRI-PROOF LIGHT		TYPE:BAWATY-52W-SW-40					WEIGHT:				
SPEC.:52W 4000K		DIM.: L:1567mm					SERIAL No.:				
MFR.: DIMON TECHNOLOGY LTD		SUR.:					Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	Viewed crosswise					Viewed endwise					
x = 2H y = 2H	25.1	26.6	25.4	26.8	27.0	25.1	26.6	25.4	26.8	27.0	
3H	26.2	27.6	26.5	27.8	28.1	26.2	27.6	26.5	27.8	28.0	
4H	26.5	27.8	26.8	28.1	28.3	26.4	27.7	26.8	28.0	28.2	
6H	26.6	27.8	26.9	28.0	28.3	26.5	27.7	26.8	28.0	28.3	
8H	26.5	27.7	26.9	28.0	28.3	26.5	27.6	26.8	27.9	28.2	
12H	26.5	27.6	26.8	27.9	28.2	26.4	27.5	26.8	27.8	28.1	
4H 2H	25.6	26.9	25.9	27.2	27.4	25.6	26.9	25.9	27.2	27.4	
3H	26.9	28.0	27.2	28.3	28.6	26.8	28.0	27.2	28.3	28.6	
4H	27.2	28.3	27.6	28.6	28.9	27.2	28.2	27.5	28.5	28.8	
6H	27.3	28.2	27.7	28.6	29.0	27.3	28.2	27.7	28.5	28.9	
8H	27.3	28.2	27.7	28.5	28.9	27.2	28.1	27.7	28.4	28.8	
12H	27.3	28.0	27.7	28.4	28.8	27.2	28.0	27.6	28.4	28.8	
8H 4H	27.3	28.2	27.7	28.5	28.9	27.3	28.1	27.7	28.5	28.9	
6H	27.5	28.2	27.9	28.6	29.0	27.4	28.1	27.8	28.5	28.9	
8H	27.5	28.1	27.9	28.5	28.9	27.4	28.0	27.9	28.4	28.9	
12H	27.4	28.0	27.9	28.4	28.9	27.4	27.9	27.8	28.3	28.8	
12H 4H	27.3	28.1	27.7	28.4	28.9	27.2	28.0	27.7	28.4	28.8	
6H	27.4	28.1	27.9	28.5	28.9	27.4	28.0	27.8	28.4	28.9	
8H	27.4	28.0	27.9	28.4	28.9	27.4	27.9	27.9	28.3	28.8	
Variations with the observer position at spacings:											
S = 1.0H	+ 0.3 / - 0.3					+ 0.2 / - 0.3					
1.5H	+ 0.2 / - 0.4					+ 0.2 / - 0.4					
2.0H	+ 0.4 / - 0.4					+ 0.4 / - 0.4					

CIE Pub.117, 6500 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 6.5)

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

UTILIZATION FACTORS TABLE

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-52W-SW-40	WEIGHT:
SPEC.:52W 4000K	DIM.: L:1567mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	59	47	40	58	47	40	57	46	40	34
0.80	69	58	50	68	57	50	66	56	50	43
1.00	78	67	60	76	66	60	74	68	59	52
1.25	85	75	68	83	74	68	81	73	67	60
1.50	90	80	74	88	80	73	85	78	72	65
2.00	97	89	83	95	87	82	91	85	80	73
2.50	100	93	87	98	92	87	95	89	85	77
3.00	104	97	92	101	96	91	98	93	89	81
4.00	107	102	98	105	100	97	101	97	94	85
5.00	110	105	102	107	103	100	103	100	97	88
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16


γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

ISOCANDELA DIAGRAM

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-52W-SW-40	WEIGHT:
SPEC.:52W 4000K	DIM.: L:1567mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

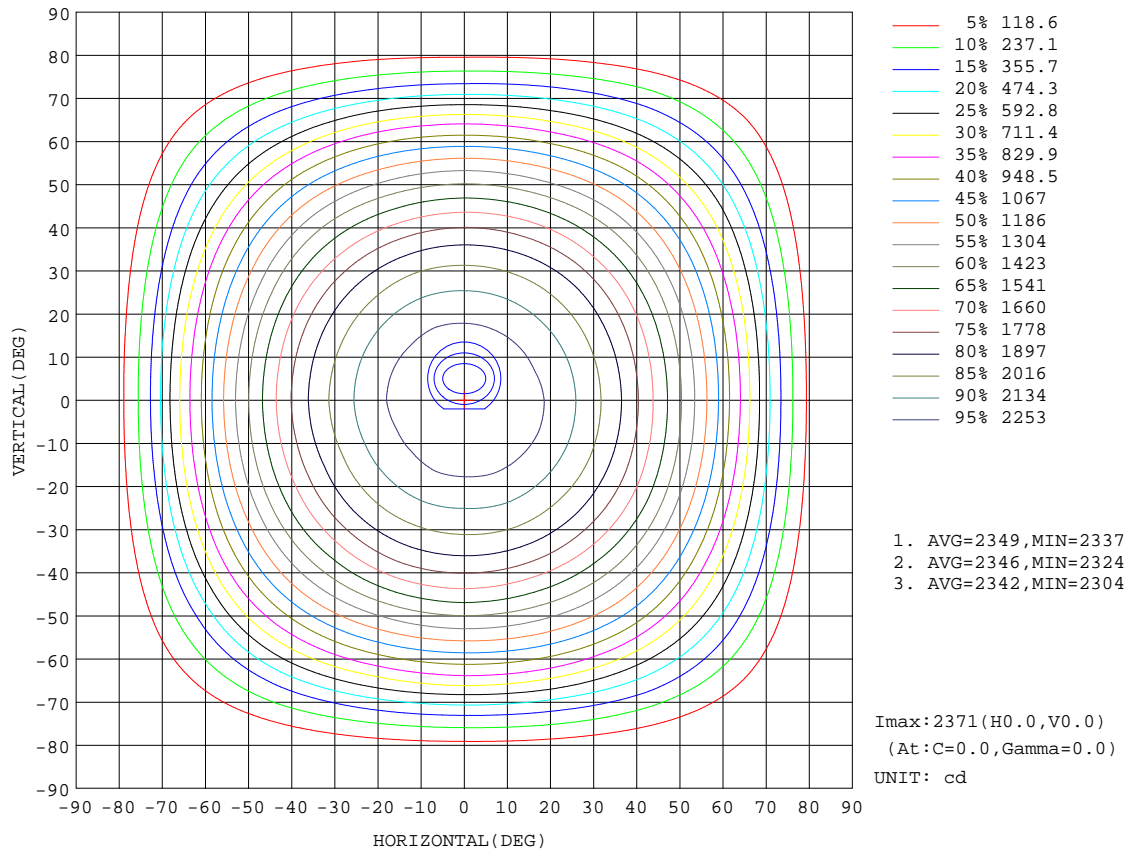

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 24.5DEG
 Operators: William
 Test Date: 2017-12-16


γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity: 65.7%
 Test Distance: 26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

AAI Figure

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-52W-SW-40	WEIGHT:
SPEC.:52W 4000K	DIM.: L:1567mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

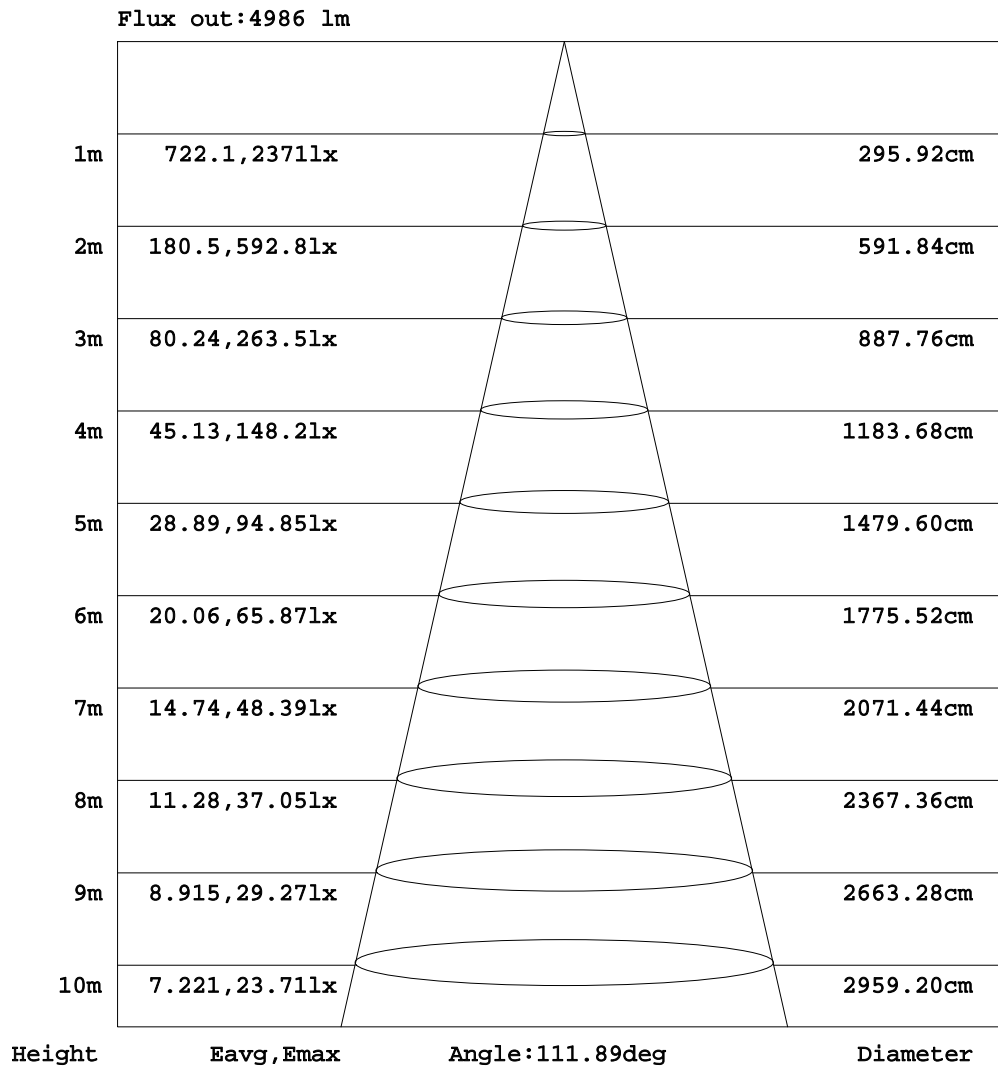

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16


γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

ISOLUX DIAGRAM

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-52W-SW-40	WEIGHT:
SPEC.:52W 4000K	DIM.: L:1567mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

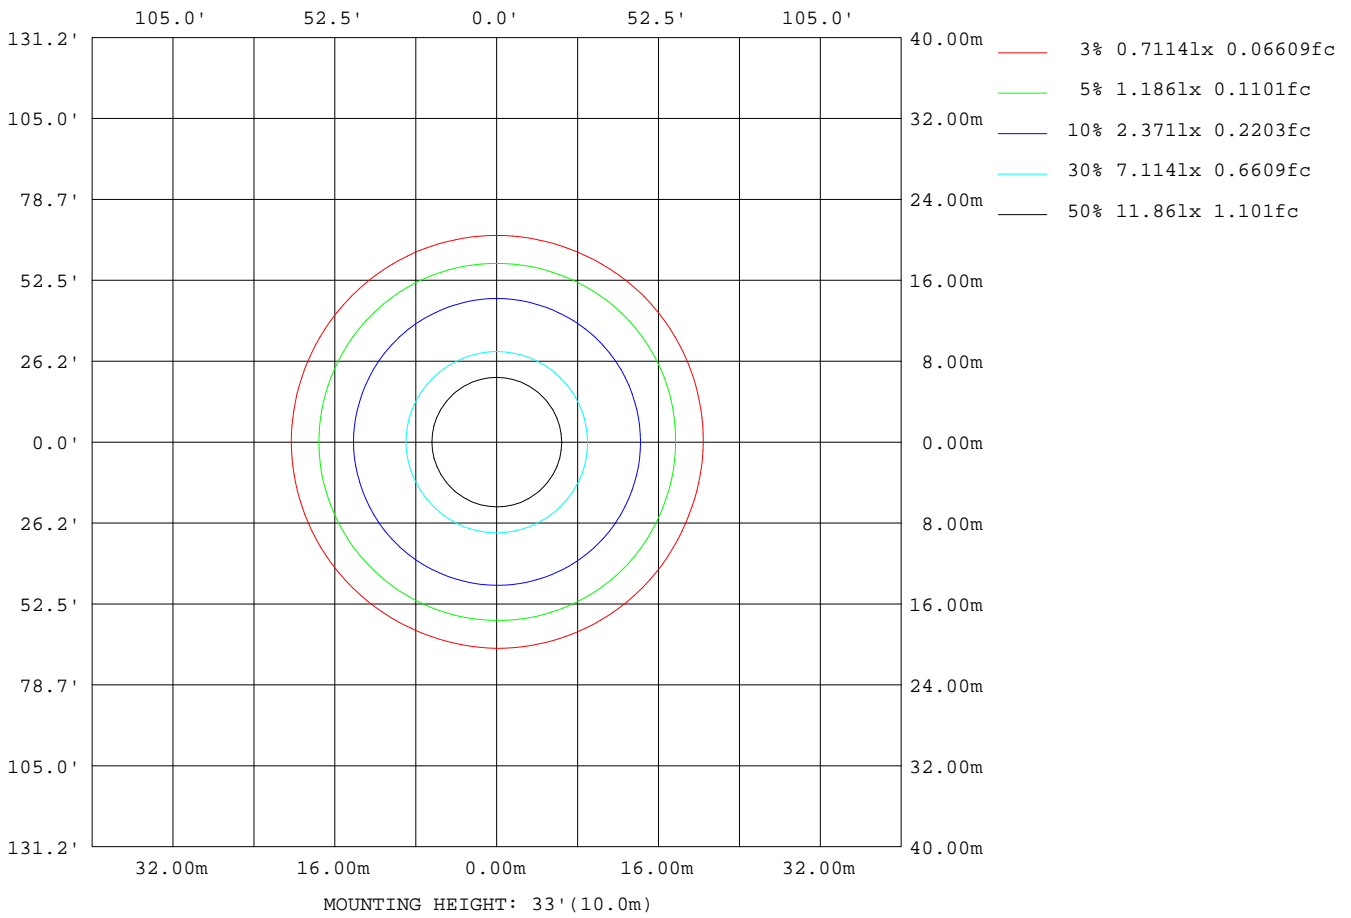


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

Planar Illuminance Curve

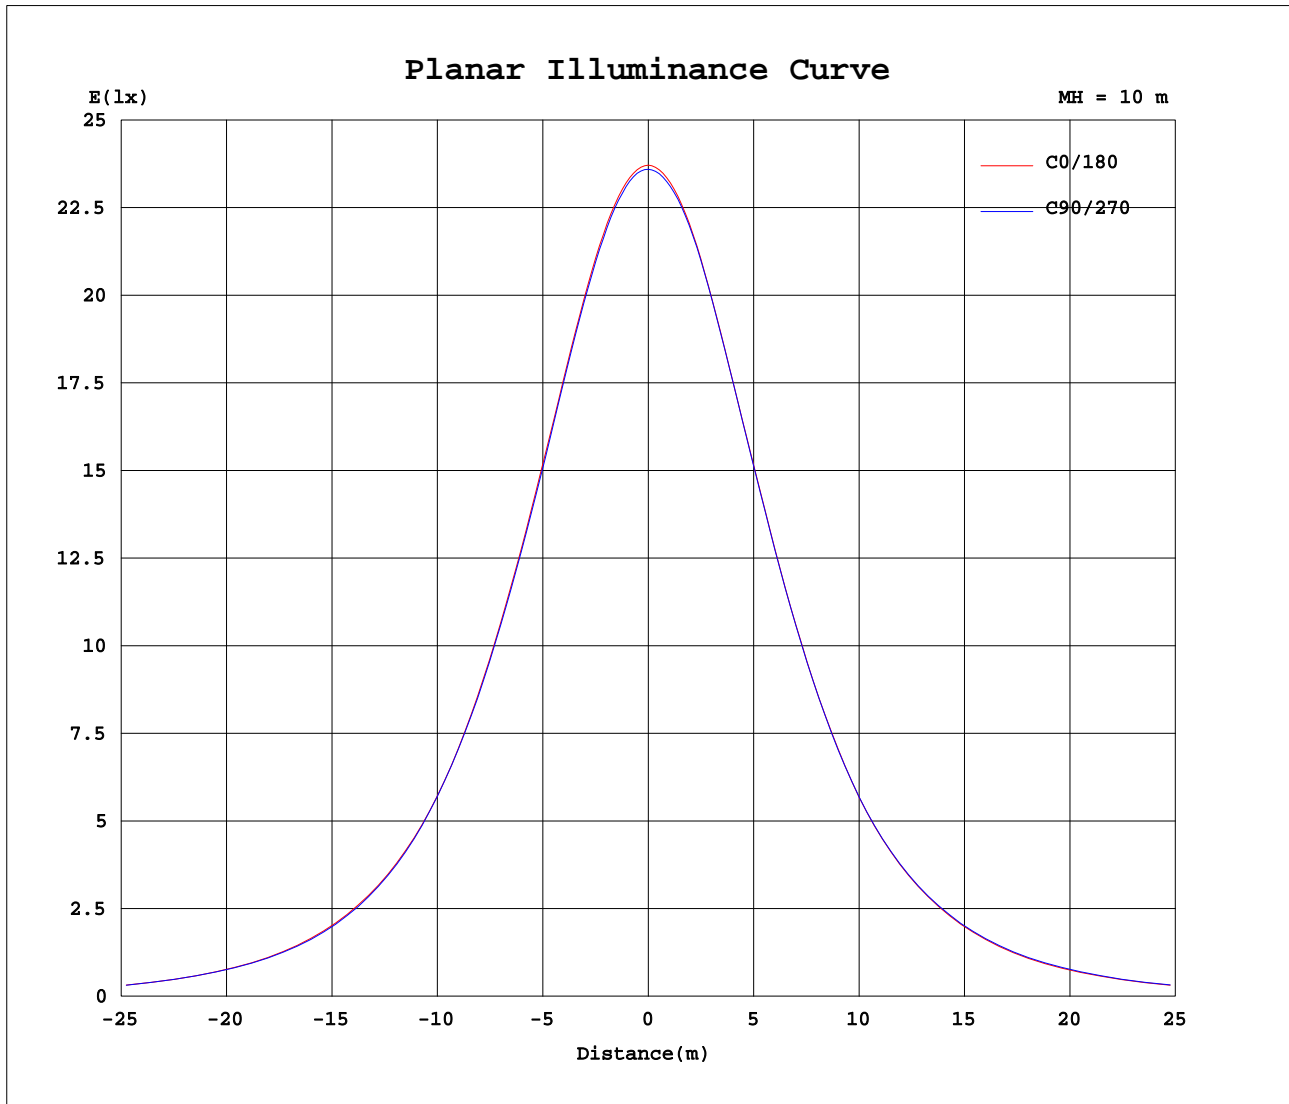

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 24.5DEG
 Operators: William
 Test Date: 2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity: 65.7%
 Test Distance: 26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-52W-SW-40	WEIGHT:
SPEC.:52W 4000K	DIM.: L:1567mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	2371	2368	2365	2363	2359	2357	2356	2354	2371	2368	2365	2363	2359	2357	2356	2354			
5	2363	2359	2359	2357	2352	2351	2347	2347	2362	2358	2356	2354	2351	2349	2348	2347			
10	2339	2338	2338	2335	2328	2327	2322	2324	2338	2334	2330	2331	2331	2328	2326	2325			
15	2296	2296	2293	2290	2283	2284	2278	2280	2291	2289	2286	2291	2288	2285	2284	2283			
20	2233	2234	2231	2228	2221	2223	2213	2211	2224	2223	2222	2227	2222	2220	2220	2222			
25	2149	2151	2148	2146	2136	2139	2135	2135	2144	2144	2143	2145	2141	2140	2139	2144			
30	2053	2054	2049	2050	2040	2039	2035	2033	2049	2042	2041	2048	2046	2045	2044	2048			
35	1937	1935	1931	1930	1925	1921	1915	1911	1927	1925	1922	1921	1925	1924	1928	1931			
40	1790	1792	1782	1781	1782	1780	1767	1767	1783	1780	1773	1774	1781	1779	1783	1786			
45	1617	1625	1611	1606	1614	1606	1592	1595	1607	1605	1600	1599	1609	1611	1610	1616			
50	1437	1439	1430	1422	1422	1413	1410	1413	1422	1415	1424	1421	1430	1426	1434	1436			
55	1238	1234	1238	1229	1220	1212	1213	1207	1220	1214	1225	1226	1234	1230	1242	1240			
60	1019	1011	1023	1015	1006	997	993	991	994	996	1009	1015	1015	1017	1033	1031			
65	779	766	771	774	776	752	754	758	763	760	765	776	783	779	791	789			
70	520	521	520	516	505	503	500	481	497	506	509	518	521	526	540	541			
75	290	292	289	285	273	272	269	257	261	281	290	288	293	298	313	306			
80	96.7	103	101	97.8	98.3	92.2	96.0	84.5	91.2	98.6	105	110	102	114	117	116			
85	17.5	15.8	15.0	13.5	12.0	11.8	11.1	11.6	12.5	15.5	16.2	19.9	17.3	17.9	19.0	21.4			
90	0.42	0.37	0.22	0.26	0.21	0.27	0.26	0.21	0.15	1.89	0.15	0.15	0.72	0.05	2.04	0.76			
95	0.15	0.15	0.20	0.21	0.18	0.18	0.16	0.17	0.21	0.61	0.19	0.21	0.16	0.18	0.16	0.21			
100	0.13	0.15	0.19	0.23	0.20	0.21	0.17	0.18	0.47	0.46	0.46	0.47	0.46	0.41	0.41	0.41			
105	0.12	0.17	0.17	0.24	0.22	0.24	0.19	0.19	0.82	0.77	0.77	0.83	0.77	0.83	0.82	0.77			
110	0.11	0.20	0.16	0.25	0.25	0.28	0.20	0.20	1.29	1.13	1.18	1.24	1.24	1.24	1.19	1.19			
115	0.27	0.32	0.31	0.34	0.36	0.26	0.26	0.36	1.70	1.60	1.65	1.65	1.65	1.65	1.65	1.65			
120	0.82	0.67	0.82	0.77	0.72	0.56	0.66	0.62	2.03	2.01	1.92	1.83	2.06	2.01	2.11	1.96			
125	1.23	1.13	1.08	1.34	1.29	1.18	1.02	1.08	2.16	2.16	1.99	1.87	2.15	2.09	2.18	2.17			
130	1.75	1.65	1.65	1.85	1.80	1.65	1.39	1.67	2.47	2.21	2.13	2.01	2.24	2.16	2.27	2.27			
135	2.46	2.11	2.16	2.47	2.42	2.21	1.75	2.06	2.57	2.26	2.21	2.36	2.58	2.32	2.45	2.48			
140	3.23	2.93	2.83	3.35	3.25	3.24	2.52	3.03	2.83	2.57	2.37	2.63	2.68	2.73	2.68	2.68			
145	3.64	3.50	3.39	3.91	3.76	3.66	3.30	3.35	3.09	2.83	2.68	3.09	3.25	3.25	2.99	3.05			
150	4.01	4.06	4.06	4.17	4.12	4.17	3.81	3.66	3.50	3.29	3.19	3.66	3.71	3.71	3.71	3.51			
155	4.27	4.37	4.31	4.38	4.15	4.22	4.23	4.08	4.01	3.86	3.81	4.12	3.97	4.07	3.93	4.08			
160	4.45	4.43	4.48	4.47	4.38	4.38	4.32	4.29	4.26	4.17	4.10	4.33	4.48	4.23	4.27	4.18			
165	4.94	4.78	4.78	4.90	4.95	4.64	4.68	4.69	4.42	4.48	4.37	4.48	4.64	4.54	4.63	4.41			
170	5.04	5.00	5.14	5.31	5.36	5.10	4.99	5.06	4.73	4.79	4.74	4.95	4.94	5.05	5.15	4.78			
175	5.40	5.20	5.50	5.63	5.60	5.31	5.35	5.21	5.25	5.15	5.15	5.36	5.31	5.31	5.30	5.16			
180	5.50	5.25	5.50	5.67	5.51	5.31	5.35	5.21	5.35	5.51	5.25	5.51	5.56	5.57	5.30	5.37			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE