
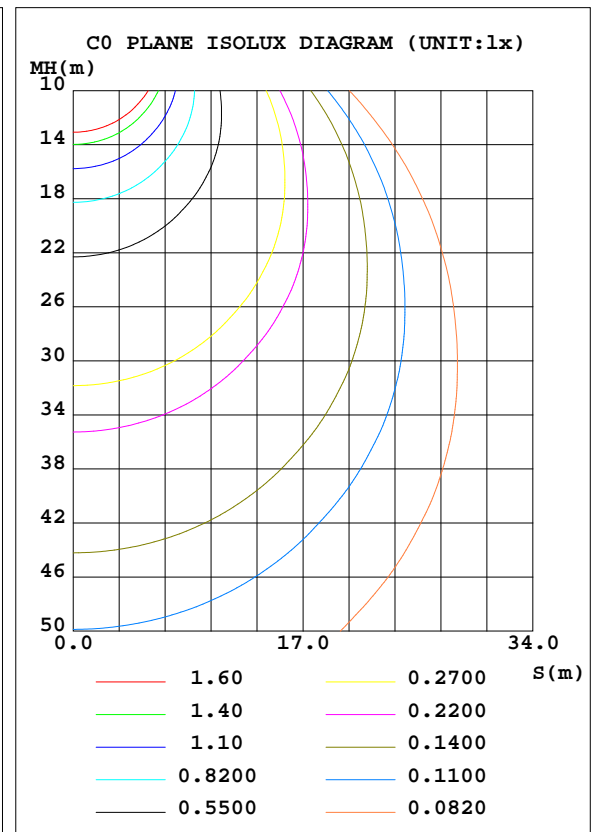


LUMINAIRE PHOTOMETRIC TEST REPORT

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-6W-SW-40	WEIGHT:
SPEC.:6W 4000K	DIM.: L:1267mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 125.00 lm/W			
MODEL	BAWATY-6W-SW-40	Imax(cd)	273.6	S/MH(C0/180)	1.28
NOMINAL POWER(W)	6	LOR(%)	100.0	S/MH(C90/270)	1.29
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	750.02	η UP, DN(C0-180)	0.1,49.8
NOMINAL FLUX(lm)	750	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.1,50.0
LAMPS INSIDE	1	η up(%)	0.2	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	220	η down(%)	99.8	CIBSE SHR MAX	1.35

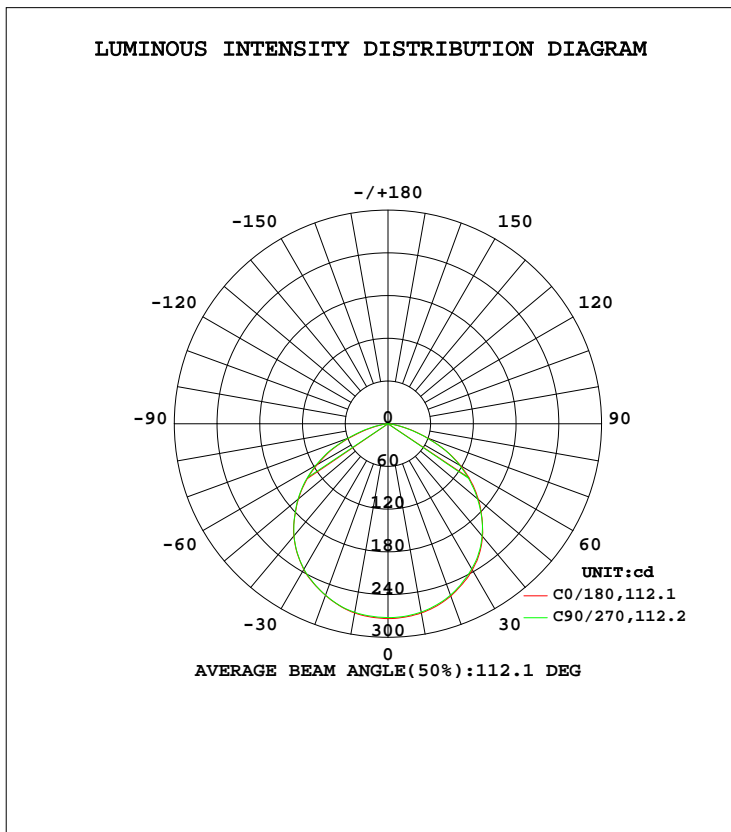

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	269.9	269.8	268.6	267.9	269.8	268.8	269.0	268.3	0- 10	25.84	25.84	3.45,3.45
20	257.6	257.4	256.3	255.3	256.6	256.4	256.3	256.2	10- 20	74.51	100.3	13.4,13.4
30	236.9	236.4	235.4	234.8	236.4	235.5	236.1	235.9	20- 30	114.0	214.3	28.6,28.6
40	206.6	205.6	205.6	203.9	205.8	204.6	205.5	205.7	30- 40	138.8	353.2	47.1,47.1
50	165.8	165.0	164.1	162.7	164.1	164.3	165.0	165.5	40- 50	143.1	496.2	66.2,66.2
60	117.6	118.0	116.1	114.6	114.7	116.4	117.1	119.2	50- 60	126.2	622.5	83,83
70	59.98	60.02	58.32	57.65	57.32	58.69	60.12	62.28	60- 70	87.44	709.9	94.7,94.7
80	11.15	11.64	11.34	11.07	10.52	12.09	11.72	13.51	70- 80	35.36	745.3	99.4,99.4
90	0.0488	0.0259	0.0244	0.0297	0.0177	0.0176	0.0828	0.2353	80- 90	3.496	748.8	99.8,99.8
100	0.0155	0.0214	0.0230	0.0199	0.0538	0.0536	0.0535	0.0475	90-100	0.0336	748.8	99.8,99.8
110	0.0123	0.0181	0.0286	0.0229	0.1485	0.1366	0.1427	0.1370	100-110	0.0608	748.9	99.8,99.8
120	0.0947	0.0947	0.0831	0.0767	0.2338	0.2216	0.2378	0.2438	110-120	0.1126	749.0	99.9,99.9
130	0.2017	0.1899	0.2078	0.1602	0.2848	0.2454	0.2580	0.2615	120-130	0.1696	749.1	99.9,99.9
140	0.3725	0.3263	0.3745	0.2910	0.3265	0.2731	0.3095	0.3089	130-140	0.2076	749.4	99.9,99.9
150	0.4629	0.4688	0.4753	0.4394	0.4037	0.3681	0.4280	0.4276	140-150	0.2386	749.6	99.9,99.9
160	0.5138	0.5164	0.5052	0.4988	0.4918	0.4736	0.5172	0.4929	150-160	0.2174	749.8	100,100
170	0.5815	0.5934	0.6180	0.5759	0.5459	0.5464	0.5698	0.5939	160-170	0.1510	750.0	100,100
180	0.6350	0.6351	0.6362	0.6176	0.6172	0.6054	0.6420	0.6117	170-180	0.0575	750.0	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 425.58 lm

%lum = 56.7%
%lamp = 56.7%

Conical surface Flux(120deg): 622.48 lm

%lum = 83.0%
%lamp = 83.0%

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:24.5DEG
Operators:William
Test Date:2017-12-16


γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
Humidity:65.7%
Test Distance:26.000m [K=1.4470]
Remarks:

Checker: DENNY

Assessor: JOE

LUMINANCE LIMITATION CURVES

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-6W-SW-40	WEIGHT:
SPEC.:6W 4000K	DIM.: L:1267mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

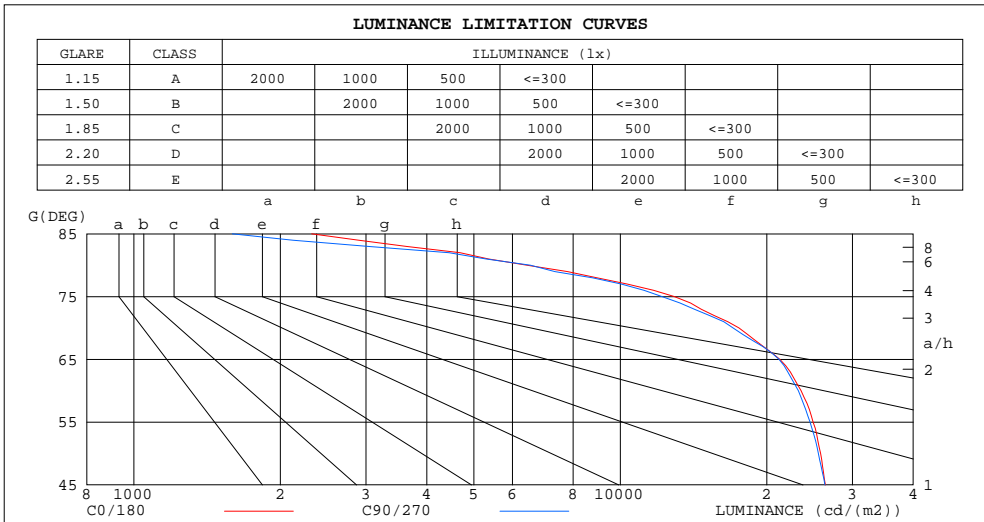

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	2321	1594
80	6423	6533
75	12911	12179
70	17537	17052
65	21273	21198
60	23526	23223
55	24906	24546
50	25800	25524
45	26389	26335

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:


Checker: DENNY

Assessor: JOE

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-6W-SW-40	WEIGHT:
SPEC.:6W 4000K	DIM.: L:1267mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.05	1.01	.98	1.03	.99	.96	.99	.96	.93	.95	.92	.90	.91	.89	.88	.86
2.0	.92	.86	.80	.90	.84	.79	.87	.82	.78	.84	.79	.76	.81	.77	.74	.72
3.0	.81	.73	.67	.80	.72	.67	.77	.71	.65	.74	.69	.64	.71	.67	.63	.61
4.0	.72	.64	.57	.71	.63	.57	.68	.61	.56	.66	.60	.55	.64	.59	.54	.52
5.0	.64	.56	.49	.63	.55	.49	.61	.54	.48	.59	.53	.48	.57	.52	.47	.45
6.0	.58	.49	.43	.57	.49	.43	.55	.48	.42	.54	.47	.42	.52	.46	.42	.40
7.0	.53	.44	.38	.52	.44	.38	.50	.43	.37	.49	.42	.37	.47	.41	.37	.35
8.0	.48	.40	.34	.47	.39	.34	.46	.39	.33	.45	.38	.33	.44	.38	.33	.31
9.0	.44	.36	.30	.43	.36	.30	.42	.35	.30	.41	.35	.30	.40	.34	.30	.28
10.0	.41	.33	.28	.40	.33	.27	.39	.32	.27	.38	.32	.27	.37	.31	.27	.25

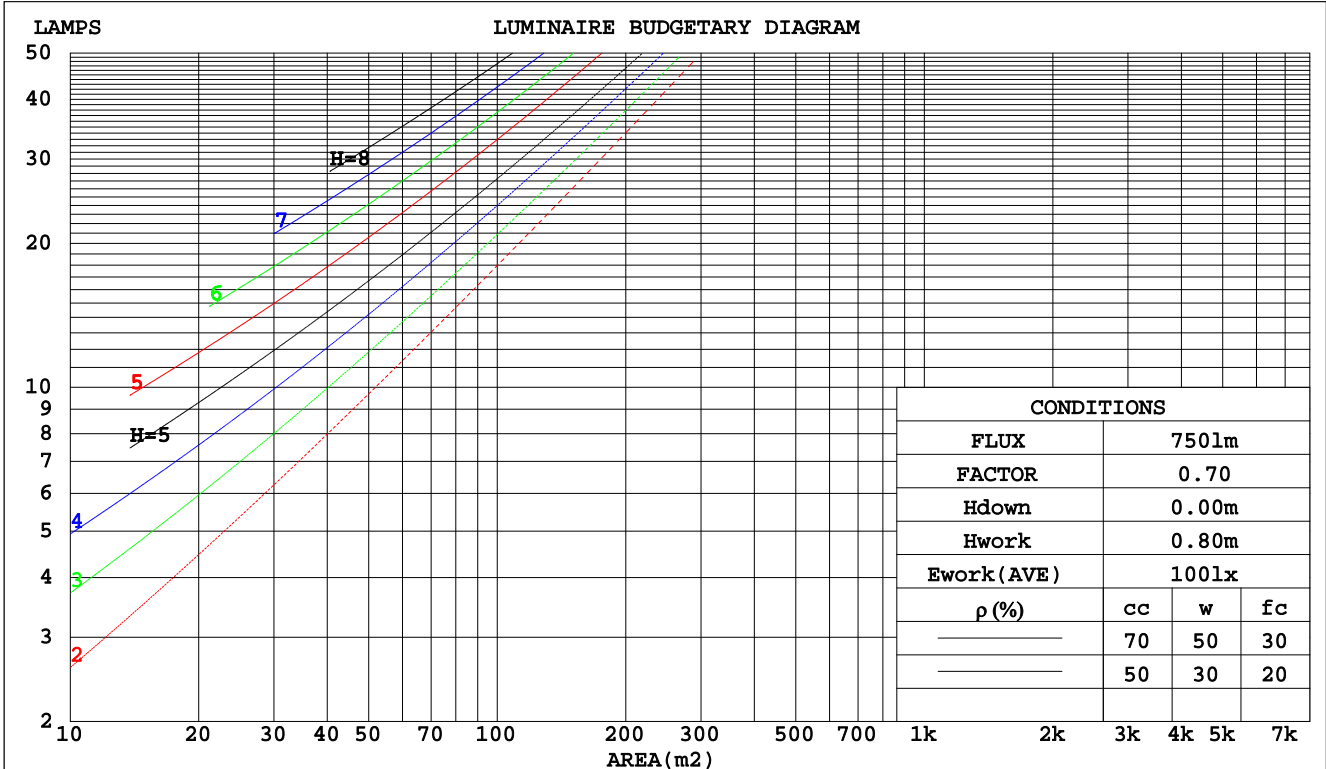

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:24.5DEG
Operators:William
Test Date:2017-12-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
Humidity:65.7%
Test Distance:26.000m [K=1.4470]
Remarks:

Checker: DENNY

Assessor: JOE

WEC AND CCEC

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-6W-SW-40	WEIGHT:
SPEC.:6W 4000K	DIM.: L:1267mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.282	.161	.051	.275	.157	.050	.262	.150	.048	.250	.144	.046	.239	.138	.045	
2.0	.274	.150	.046	.267	.147	.045	.256	.142	.044	.245	.138	.043	.235	.133	.042	
3.0	.257	.137	.041	.252	.135	.041	.242	.131	.040	.232	.127	.039	.223	.124	.038	
4.0	.240	.125	.037	.235	.123	.036	.226	.120	.036	.218	.117	.035	.210	.114	.035	
5.0	.224	.114	.033	.219	.113	.033	.211	.110	.032	.204	.107	.032	.197	.105	.032	
6.0	.208	.105	.030	.205	.103	.030	.197	.101	.029	.191	.099	.029	.184	.097	.029	
7.0	.195	.096	.027	.191	.095	.027	.185	.093	.027	.179	.092	.027	.173	.090	.026	
8.0	.182	.089	.025	.179	.088	.025	.174	.087	.025	.168	.085	.025	.163	.084	.024	
9.0	.171	.083	.023	.169	.082	.023	.163	.081	.023	.159	.079	.023	.154	.078	.023	
10.0	.161	.077	.021	.159	.077	.021	.154	.076	.021	.150	.074	.021	.146	.073	.021	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.180	.158	.138	.154	.135	.119	.105	.093	.082	.061	.054	.048	.019	.017	.015	
2.0	.171	.133	.101	.147	.115	.088	.100	.079	.061	.058	.046	.036	.019	.015	.012	
3.0	.163	.116	.077	.140	.100	.067	.096	.069	.047	.056	.040	.028	.018	.013	.009	
4.0	.156	.102	.061	.134	.088	.053	.092	.061	.037	.053	.036	.022	.017	.012	.007	
5.0	.149	.092	.049	.128	.079	.043	.088	.055	.030	.051	.033	.018	.016	.011	.006	
6.0	.142	.083	.041	.122	.072	.036	.084	.050	.025	.049	.030	.015	.016	.010	.005	
7.0	.135	.076	.035	.116	.066	.031	.080	.046	.022	.047	.027	.013	.015	.009	.004	
8.0	.129	.071	.030	.111	.061	.027	.077	.043	.019	.045	.025	.011	.014	.008	.004	
9.0	.123	.066	.027	.106	.057	.023	.073	.040	.017	.043	.024	.010	.014	.008	.003	
10.0	.117	.061	.024	.101	.053	.021	.070	.037	.015	.041	.022	.009	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

UGR(Unified Glare Rating) Table

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-6W-SW-40	WEIGHT:
SPEC.:6W 4000K	DIM.: L:1267mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	25.1	26.6	25.4	26.8	27.0	25.1	26.6	25.4	26.8	27.0
3H	26.2	27.6	26.5	27.8	28.1	26.2	27.6	26.5	27.8	28.0
4H	26.5	27.8	26.8	28.1	28.3	26.4	27.7	26.8	28.0	28.2
6H	26.6	27.8	26.9	28.0	28.3	26.5	27.7	26.8	28.0	28.3
8H	26.5	27.7	26.9	28.0	28.3	26.5	27.6	26.8	27.9	28.2
12H	26.5	27.6	26.8	27.9	28.2	26.4	27.5	26.8	27.8	28.1
4H 2H	25.6	26.9	25.9	27.2	27.4	25.6	26.9	25.9	27.2	27.4
3H	26.9	28.0	27.2	28.3	28.6	26.8	28.0	27.2	28.3	28.6
4H	27.2	28.3	27.6	28.6	28.9	27.2	28.2	27.5	28.5	28.8
6H	27.3	28.2	27.7	28.6	29.0	27.3	28.2	27.7	28.5	28.9
8H	27.3	28.2	27.7	28.5	28.9	27.2	28.1	27.7	28.4	28.8
12H	27.3	28.0	27.7	28.4	28.8	27.2	28.0	27.6	28.4	28.8
8H 4H	27.3	28.2	27.7	28.5	28.9	27.3	28.1	27.7	28.5	28.9
6H	27.5	28.2	27.9	28.6	29.0	27.4	28.1	27.8	28.5	28.9
8H	27.5	28.1	27.9	28.5	28.9	27.4	28.0	27.9	28.4	28.9
12H	27.4	28.0	27.9	28.4	28.9	27.4	27.9	27.8	28.3	28.8
12H 4H	27.3	28.1	27.7	28.4	28.9	27.2	28.0	27.7	28.4	28.8
6H	27.4	28.1	27.9	28.5	28.9	27.4	28.0	27.8	28.4	28.9
8H	27.4	28.0	27.9	28.4	28.9	27.4	27.9	27.9	28.3	28.8
Variations with the observer position at spacings:										
S = 1.0H	+ 0.3 / - 0.3					+ 0.2 / - 0.3				
1.5H	+ 0.2 / - 0.4					+ 0.2 / - 0.4				
2.0H	+ 0.4 / - 0.4					+ 0.4 / - 0.4				

CIE Pub.117, 750.0 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -1.0)

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

UTILIZATION FACTORS TABLE

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-6W-SW-40	WEIGHT:
SPEC.:6W 4000K	DIM.: L:1267mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	59	47	40	58	47	40	57	46	40	34
0.80	69	58	50	68	57	50	66	56	50	43
1.00	78	67	60	76	66	60	74	68	59	52
1.25	85	75	68	83	74	68	81	73	67	60
1.50	90	80	74	88	80	73	85	78	72	65
2.00	97	89	83	95	87	82	91	85	80	73
2.50	100	93	87	98	92	87	95	89	85	77
3.00	104	97	92	101	96	91	98	93	89	81
4.00	107	102	98	105	100	97	101	97	94	85
5.00	110	105	102	107	103	100	103	100	97	88
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16


γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

ISOCANDELA DIAGRAM

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-6W-SW-40	WEIGHT:
SPEC.:6W 4000K	DIM.: L:1267mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

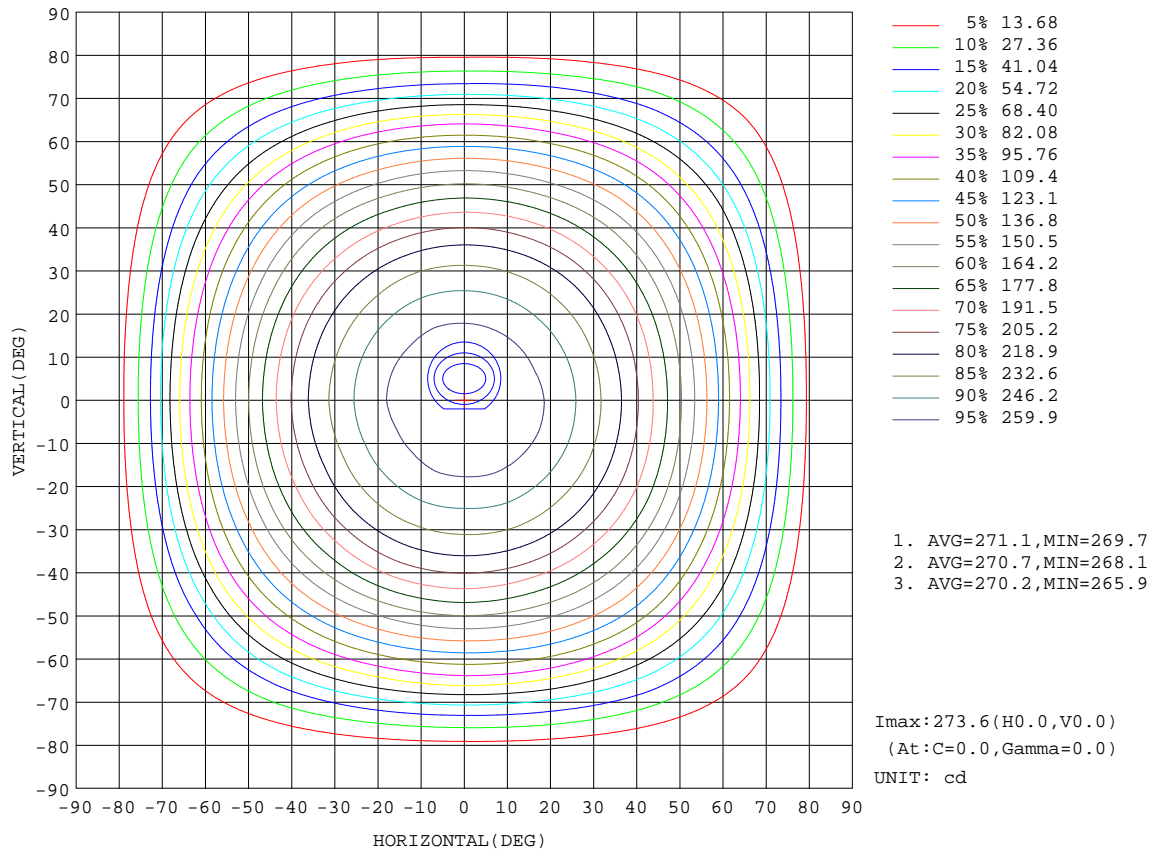

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 24.5DEG
 Operators: William
 Test Date: 2017-12-16


γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity: 65.7%
 Test Distance: 26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

AAI Figure

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-6W-SW-40	WEIGHT:
SPEC.:6W 4000K	DIM.: L:1267mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

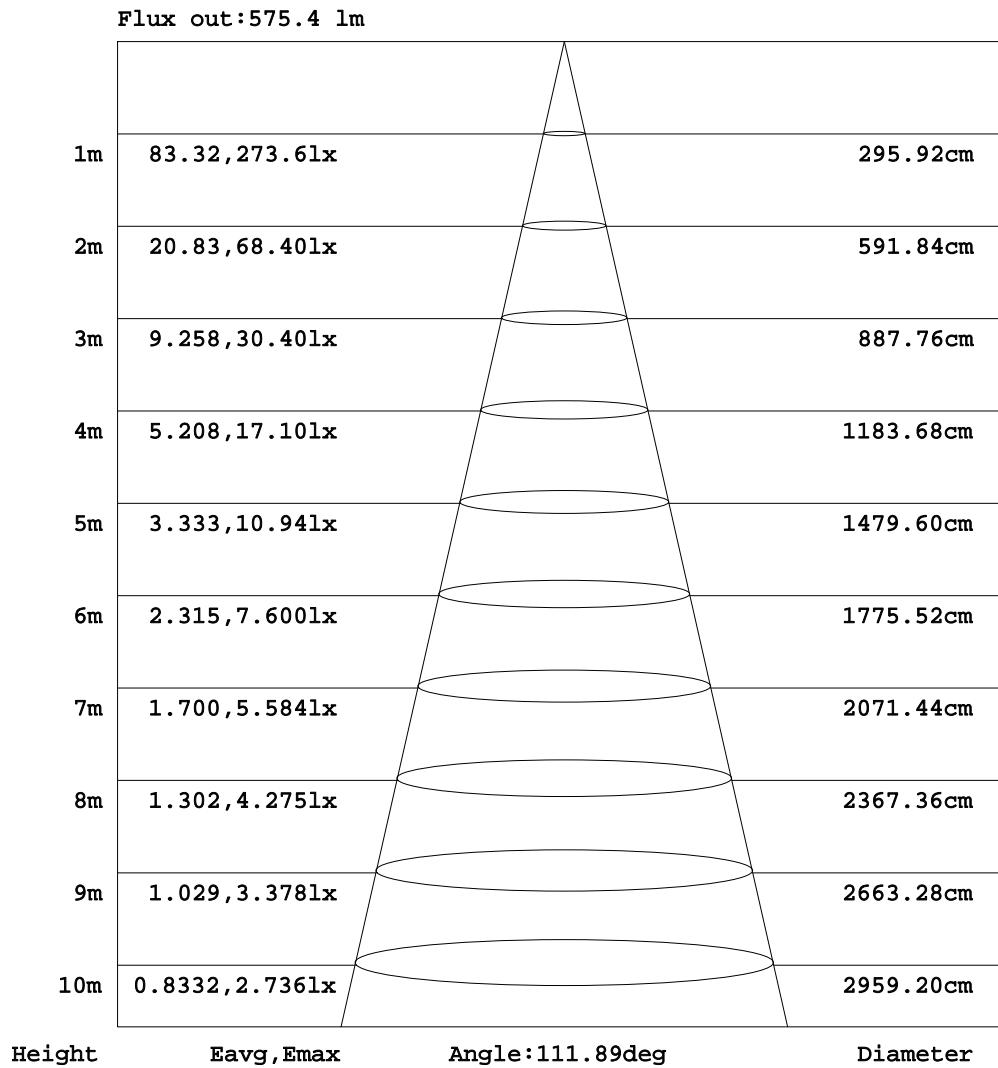

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16


γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

ISOLUX DIAGRAM

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-6W-SW-40	WEIGHT:
SPEC.:6W 4000K	DIM.: L:1267mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

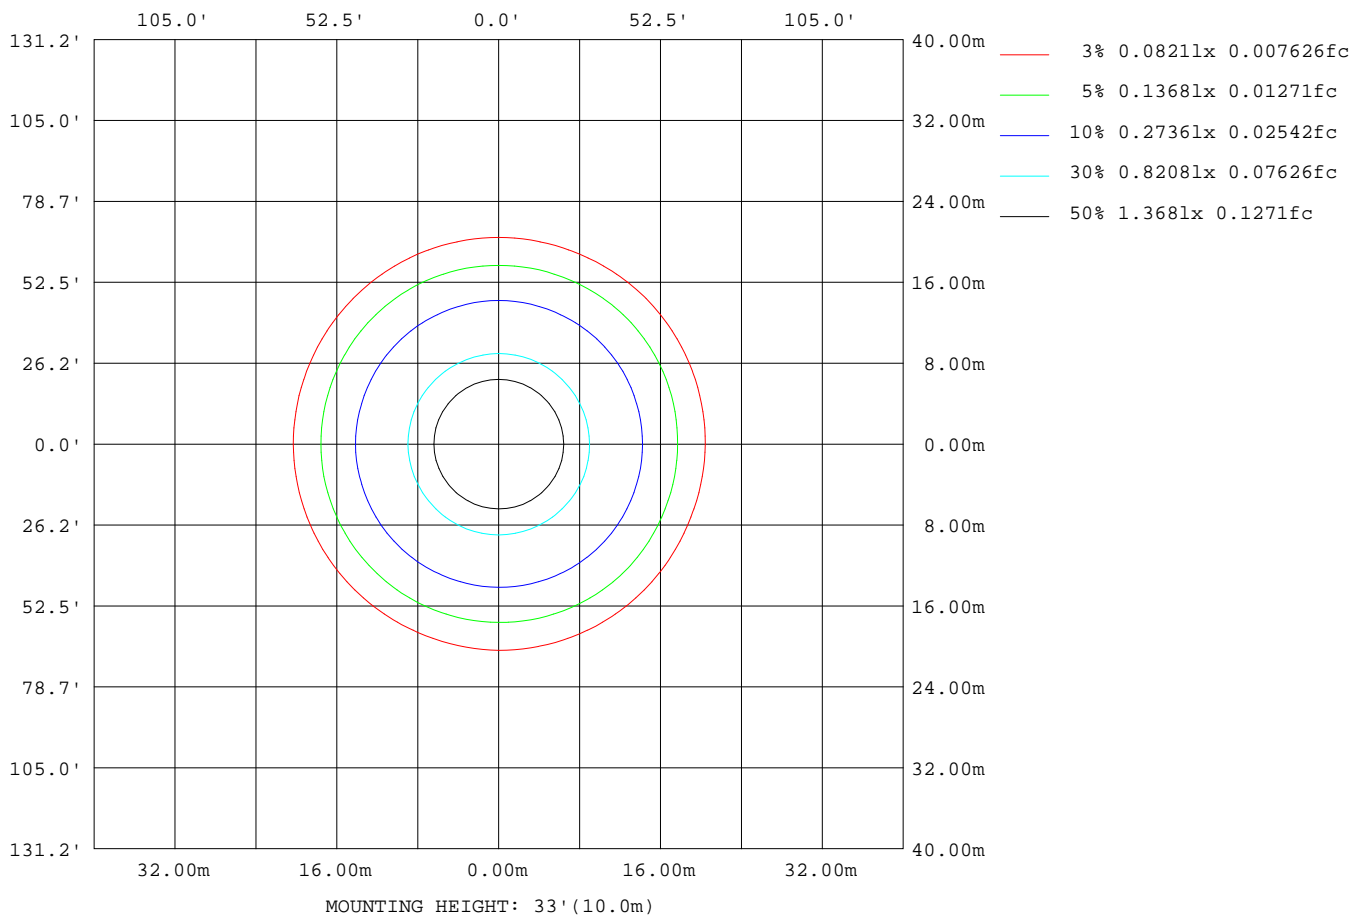


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

Planar Illuminance Curve

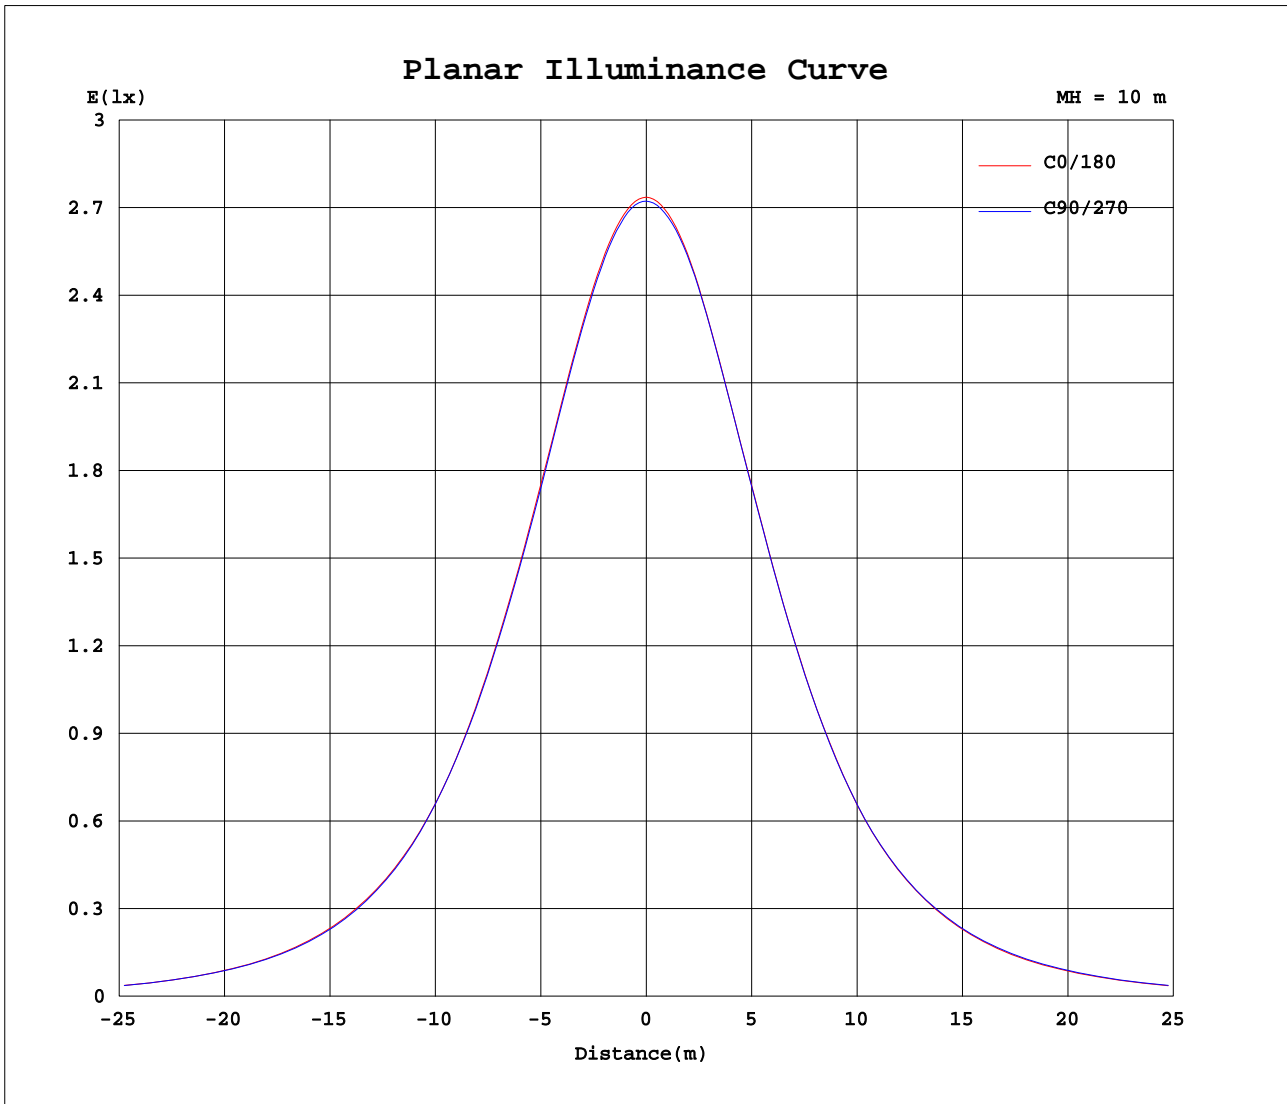

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 24.5DEG
 Operators: William
 Test Date: 2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity: 65.7%
 Test Distance: 26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-6W-SW-40	WEIGHT:
SPEC.:6W 4000K	DIM.: L:1267mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	274	273	273	273	272	272	272	272	274	273	273	273	272	272	272	272			
5	273	272	272	272	271	271	271	271	273	272	272	272	271	271	271	271			
10	270	270	270	269	269	268	268	268	270	269	269	269	269	269	268	268			
15	265	265	265	264	263	264	263	263	264	264	264	264	264	264	264	263			
20	258	258	257	257	256	256	255	255	257	257	256	257	256	256	256	256			
25	248	248	248	248	246	247	246	246	247	247	247	248	247	247	247	247			
30	237	237	236	237	235	235	235	235	236	236	236	236	236	236	236	236			
35	224	223	223	223	222	222	221	220	222	222	222	222	222	222	222	223			
40	207	207	206	205	206	205	204	204	206	205	205	205	205	205	206	206			
45	187	188	186	185	186	185	184	184	185	185	185	185	186	186	186	186			
50	166	166	165	164	164	163	163	163	164	163	164	164	165	165	165	166			
55	143	142	143	142	141	140	140	139	141	140	141	141	142	142	143	143			
60	118	117	118	117	116	115	115	114	115	115	116	117	117	117	119	119			
65	89.9	88.4	88.9	89.3	89.6	86.8	87.0	87.5	88.1	87.7	88.2	89.6	90.3	89.9	91.3	91.1			
70	60.0	60.1	60.0	59.5	58.3	58.0	57.7	55.6	57.3	58.4	58.7	59.7	60.1	60.7	62.3	62.5			
75	33.4	33.7	33.4	32.8	31.5	31.4	31.0	29.6	30.2	32.5	33.5	33.2	33.8	34.4	36.1	35.4			
80	11.2	11.9	11.6	11.3	11.3	10.6	11.1	9.75	10.5	11.4	12.1	12.6	11.7	13.1	13.5	13.4			
85	2.02	1.82	1.73	1.55	1.39	1.36	1.28	1.34	1.44	1.79	1.87	2.30	2.00	2.07	2.19	2.47			
90	0.05	0.04	0.03	0.03	0.02	0.03	0.03	0.02	0.02	0.22	0.02	0.02	0.08	0.01	0.24	0.09			
95	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.07	0.02	0.02	0.02	0.02	0.02	0.02			
100	0.02	0.02	0.02	0.03	0.02	0.02	0.02	0.02	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05			
105	0.01	0.02	0.02	0.03	0.03	0.03	0.02	0.02	0.10	0.09	0.09	0.10	0.09	0.10	0.10	0.09			
110	0.01	0.02	0.02	0.03	0.03	0.03	0.02	0.02	0.15	0.13	0.14	0.14	0.14	0.14	0.14	0.14			
115	0.03	0.04	0.04	0.04	0.04	0.03	0.03	0.04	0.20	0.18	0.19	0.19	0.19	0.19	0.19	0.19			
120	0.09	0.08	0.09	0.09	0.08	0.07	0.08	0.07	0.23	0.23	0.22	0.21	0.24	0.23	0.24	0.23			
125	0.14	0.13	0.12	0.15	0.15	0.14	0.12	0.12	0.25	0.25	0.23	0.22	0.25	0.24	0.25	0.25			
130	0.20	0.19	0.19	0.21	0.21	0.19	0.16	0.19	0.28	0.26	0.25	0.23	0.26	0.25	0.26	0.26			
135	0.28	0.24	0.25	0.29	0.28	0.26	0.20	0.24	0.30	0.26	0.26	0.27	0.30	0.27	0.28	0.29			
140	0.37	0.34	0.33	0.39	0.37	0.37	0.29	0.35	0.33	0.30	0.27	0.30	0.31	0.32	0.31	0.31			
145	0.42	0.40	0.39	0.45	0.43	0.42	0.38	0.39	0.36	0.33	0.31	0.36	0.37	0.37	0.34	0.35			
150	0.46	0.47	0.47	0.48	0.48	0.48	0.44	0.42	0.40	0.38	0.37	0.42	0.43	0.43	0.43	0.40			
155	0.49	0.50	0.50	0.51	0.48	0.49	0.49	0.47	0.46	0.45	0.44	0.48	0.46	0.47	0.45	0.47			
160	0.51	0.51	0.52	0.52	0.51	0.51	0.50	0.49	0.49	0.48	0.47	0.50	0.52	0.49	0.49	0.48			
165	0.57	0.55	0.55	0.56	0.57	0.54	0.54	0.54	0.51	0.52	0.50	0.52	0.54	0.52	0.53	0.51			
170	0.58	0.58	0.59	0.61	0.62	0.59	0.58	0.58	0.55	0.55	0.55	0.57	0.57	0.58	0.59	0.55			
175	0.62	0.60	0.64	0.65	0.65	0.61	0.62	0.60	0.61	0.59	0.59	0.62	0.61	0.61	0.61	0.60			
180	0.63	0.61	0.64	0.65	0.64	0.61	0.62	0.60	0.62	0.64	0.61	0.64	0.64	0.64	0.61	0.62			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE