
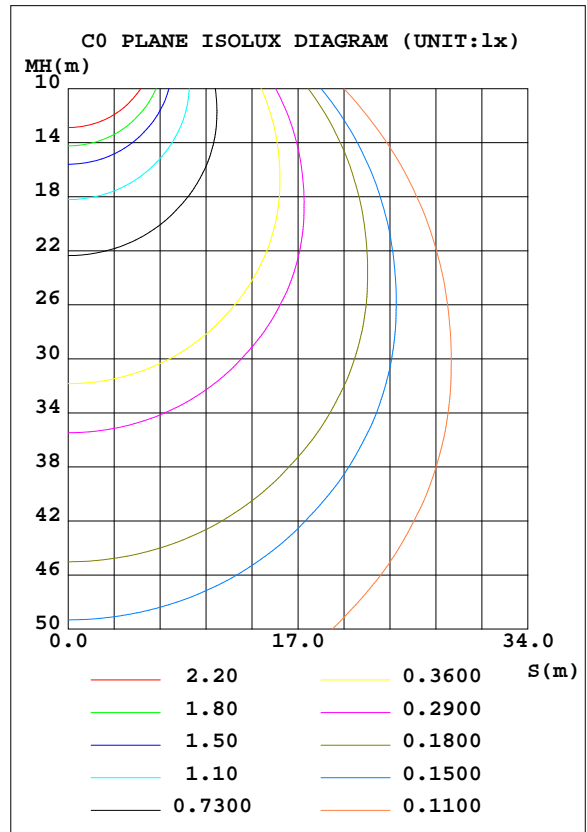


LUMINAIRE PHOTOMETRIC TEST REPORT

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-8W-SW-40	WEIGHT:
SPEC.:8W 4000K	DIM.: L:657mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 125.00 lm/W			
MODEL	BAWATY-8W-SW-40	Imax(cd)	364.8	S/MH(C0/180)	1.28
NOMINAL POWER(W)	8	LOR(%)	100.0	S/MH(C90/270)	1.29
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	1000.0	η UP, DN(C0-180)	0.1,49.8
NOMINAL FLUX(lm)	1000	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.1,50.0
LAMPS INSIDE	1	η up(%)	0.2	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	220	η down(%)	99.8	CIBSE SHR MAX	1.35

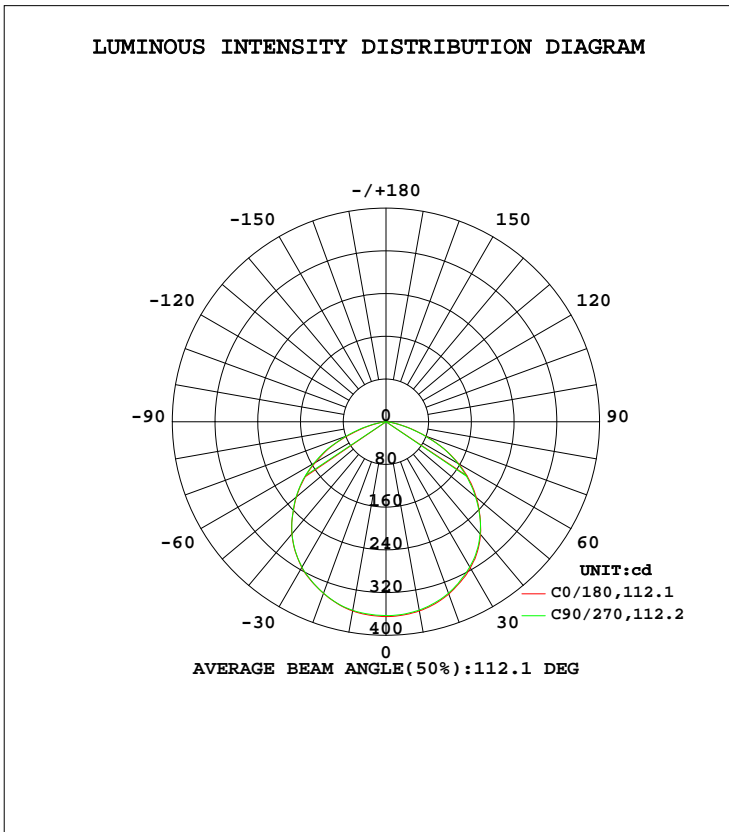

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	359.8	359.7	358.1	357.2	359.7	358.4	358.6	357.8	0- 10	34.46	34.46	3.45,3.45
20	343.5	343.2	341.7	340.4	342.1	341.9	341.8	341.5	10- 20	99.34	133.8	13.4,13.4
30	315.9	315.2	313.9	313.0	315.2	314.0	314.7	314.5	20- 30	152.0	285.8	28.6,28.6
40	275.4	274.1	274.2	271.9	274.3	272.7	274.0	274.3	30- 40	185.1	470.9	47.1,47.1
50	221.1	220.0	218.8	216.9	218.8	219.1	220.0	220.6	40- 50	190.7	661.6	66.2,66.2
60	156.8	157.3	154.8	152.7	153.0	155.2	156.1	158.9	50- 60	168.3	830.0	83,83
70	79.97	80.03	77.76	76.87	76.42	78.25	80.17	83.04	60- 70	116.6	946.6	94.7,94.7
80	14.87	15.53	15.12	14.76	14.03	16.13	15.63	18.02	70- 80	47.14	993.7	99.4,99.4
90	0.0650	0.0345	0.0325	0.0396	0.0236	0.0235	0.1104	0.3137	80- 90	4.661	998.4	99.8,99.8
100	0.0207	0.0285	0.0307	0.0265	0.0717	0.0715	0.0713	0.0634	90-100	0.0448	998.4	99.8,99.8
110	0.0164	0.0242	0.0381	0.0305	0.1980	0.1821	0.1903	0.1827	100-110	0.0811	998.5	99.8,99.8
120	0.1262	0.1262	0.1107	0.1023	0.3117	0.2955	0.3170	0.3250	110-120	0.1502	998.6	99.9,99.9
130	0.2689	0.2532	0.2770	0.2135	0.3798	0.3271	0.3440	0.3486	120-130	0.2262	998.9	99.9,99.9
140	0.4967	0.4351	0.4993	0.3880	0.4354	0.3642	0.4126	0.4118	130-140	0.2769	999.1	99.9,99.9
150	0.6172	0.6251	0.6337	0.5859	0.5383	0.4908	0.5707	0.5701	140-150	0.3181	999.5	99.9,99.9
160	0.6851	0.6885	0.6736	0.6650	0.6558	0.6315	0.6895	0.6573	150-160	0.2899	999.7	100,100
170	0.7753	0.7912	0.8240	0.7679	0.7279	0.7286	0.7597	0.7918	160-170	0.2014	999.9	100,100
180	0.8466	0.8467	0.8483	0.8235	0.8229	0.8072	0.8560	0.8156	170-180	0.0766	1000	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 567.44 lm

%lum = 56.7%
%lamp = 56.7%

Conical surface Flux(120deg): 829.97 lm

%lum = 83.0%
%lamp = 83.0%

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:24.5DEG
Operators:William
Test Date:2017-12-16


γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
Humidity:65.7%
Test Distance:26.000m [K=1.4470]
Remarks:

Checker: DENNY

Assessor: JOE

LUMINANCE LIMITATION CURVES

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-8W-SW-40	WEIGHT:
SPEC.:8W 4000K	DIM.: L:657mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

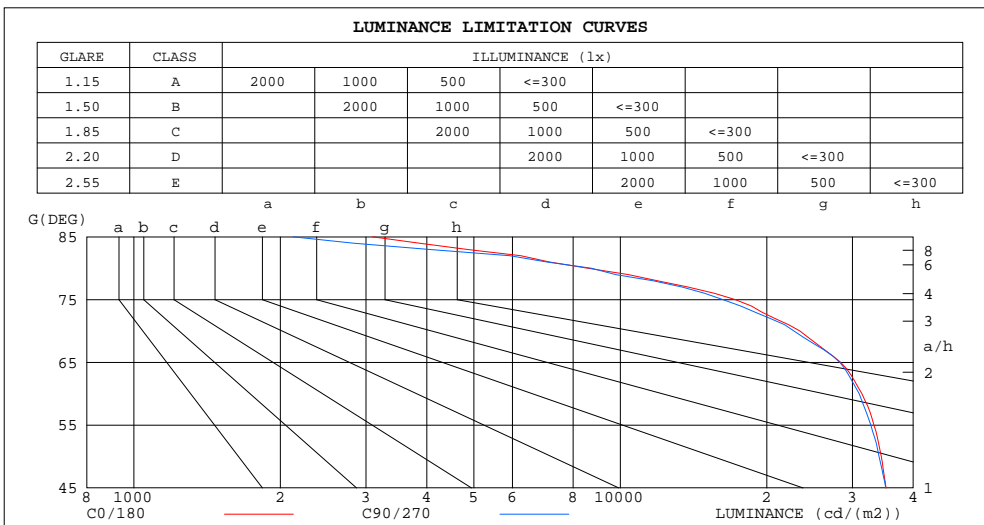

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	3095	2125
80	8564	8710
75	17215	16239
70	23383	22736
65	28364	28264
60	31368	30964
55	33209	32728
50	34400	34032
45	35185	35113

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:


Checker: DENNY

Assessor: JOE

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-8W-SW-40	WEIGHT:
SPEC.:8W 4000K	DIM.: L:657mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pw																
pfc																
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.05	1.01	.98	1.03	.99	.96	.99	.96	.93	.95	.92	.90	.91	.89	.88	.86
2.0	.92	.86	.80	.90	.84	.79	.87	.82	.78	.84	.79	.76	.81	.77	.74	.72
3.0	.81	.73	.67	.80	.72	.67	.77	.71	.65	.74	.69	.64	.71	.67	.63	.61
4.0	.72	.64	.57	.71	.63	.57	.68	.61	.56	.66	.60	.55	.64	.59	.54	.52
5.0	.64	.56	.49	.63	.55	.49	.61	.54	.48	.59	.53	.48	.57	.52	.47	.45
6.0	.58	.49	.43	.57	.49	.43	.55	.48	.42	.54	.47	.42	.52	.46	.42	.40
7.0	.53	.44	.38	.52	.44	.38	.50	.43	.37	.49	.42	.37	.47	.41	.37	.35
8.0	.48	.40	.34	.47	.39	.34	.46	.39	.33	.45	.38	.33	.44	.38	.33	.31
9.0	.44	.36	.30	.43	.36	.30	.42	.35	.30	.41	.35	.30	.40	.34	.30	.28
10.0	.41	.33	.28	.40	.33	.27	.39	.32	.27	.38	.32	.27	.37	.31	.27	.25

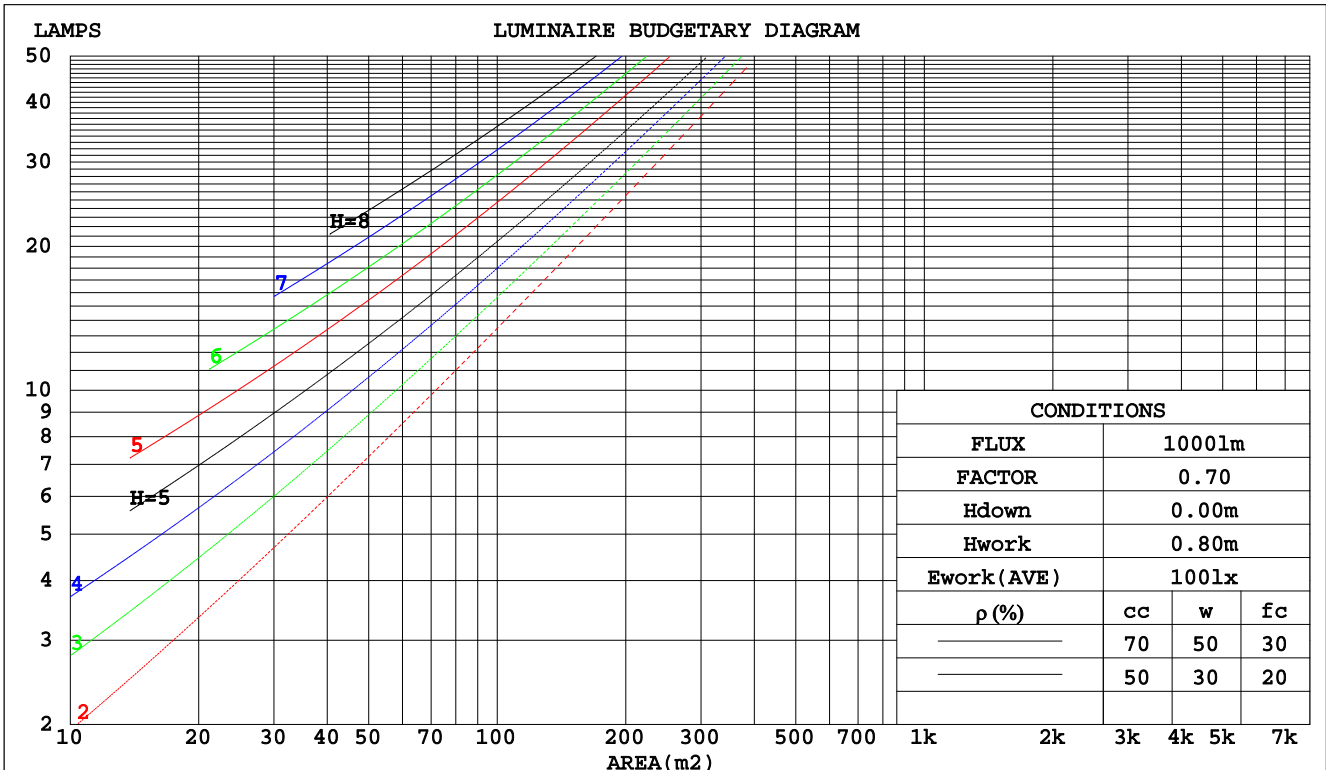

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

WEC AND CCEC

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-8W-SW-40	WEIGHT:
SPEC.:8W 4000K	DIM.: L:657mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.282	.161	.051	.275	.157	.050	.262	.150	.048	.250	.144	.046	.239	.138	.045	
2.0	.274	.150	.046	.267	.147	.045	.256	.142	.044	.245	.138	.043	.235	.133	.042	
3.0	.257	.137	.041	.252	.135	.041	.242	.131	.040	.232	.127	.039	.223	.124	.038	
4.0	.240	.125	.037	.235	.123	.036	.226	.120	.036	.218	.117	.035	.210	.114	.035	
5.0	.224	.114	.033	.219	.113	.033	.211	.110	.032	.204	.107	.032	.197	.105	.032	
6.0	.208	.105	.030	.205	.103	.030	.197	.101	.029	.191	.099	.029	.184	.097	.029	
7.0	.195	.096	.027	.191	.095	.027	.185	.093	.027	.179	.092	.027	.173	.090	.026	
8.0	.182	.089	.025	.179	.088	.025	.174	.087	.025	.168	.085	.025	.163	.084	.024	
9.0	.171	.083	.023	.169	.082	.023	.163	.081	.023	.159	.079	.023	.154	.078	.023	
10.0	.161	.077	.021	.159	.077	.021	.154	.076	.021	.150	.074	.021	.146	.073	.021	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.180	.158	.138	.154	.135	.119	.105	.093	.082	.061	.054	.048	.019	.017	.015	
2.0	.171	.133	.101	.147	.115	.088	.100	.079	.061	.058	.046	.036	.019	.015	.012	
3.0	.163	.116	.077	.140	.100	.067	.096	.069	.047	.056	.040	.028	.018	.013	.009	
4.0	.156	.102	.061	.134	.088	.053	.092	.061	.037	.053	.036	.022	.017	.012	.007	
5.0	.149	.092	.049	.128	.079	.043	.088	.055	.030	.051	.033	.018	.016	.011	.006	
6.0	.142	.083	.041	.122	.072	.036	.084	.050	.025	.049	.030	.015	.016	.010	.005	
7.0	.135	.076	.035	.116	.066	.031	.080	.046	.022	.047	.027	.013	.015	.009	.004	
8.0	.129	.071	.030	.111	.061	.027	.077	.043	.019	.045	.025	.011	.014	.008	.004	
9.0	.123	.066	.027	.106	.057	.023	.073	.040	.017	.043	.024	.010	.014	.008	.003	
10.0	.117	.061	.024	.101	.053	.021	.070	.037	.015	.041	.022	.009	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

UGR(Unified Glare Rating) Table

NAME: LED TRI-PROOF LIGHT		TYPE:BAWATY-8W-SW-40					WEIGHT:				
SPEC.:8W 4000K		DIM.: L:657mm					SERIAL No.:				
MFR.: DIMON TECHNOLOGY LTD		SUR.:					Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	Viewed crosswise					Viewed endwise					
x = 2H y = 2H	25.1	26.6	25.4	26.8	27.0	25.1	26.6	25.4	26.8	27.0	
3H	26.2	27.6	26.5	27.8	28.1	26.2	27.6	26.5	27.8	28.0	
4H	26.5	27.8	26.8	28.1	28.3	26.4	27.7	26.8	28.0	28.2	
6H	26.6	27.8	26.9	28.0	28.3	26.5	27.7	26.8	28.0	28.3	
8H	26.5	27.7	26.9	28.0	28.3	26.5	27.6	26.8	27.9	28.2	
12H	26.5	27.6	26.8	27.9	28.2	26.4	27.5	26.8	27.8	28.1	
4H 2H	25.6	26.9	25.9	27.2	27.4	25.6	26.9	25.9	27.2	27.4	
3H	26.9	28.0	27.2	28.3	28.6	26.8	28.0	27.2	28.3	28.6	
4H	27.2	28.3	27.6	28.6	28.9	27.2	28.2	27.5	28.5	28.8	
6H	27.3	28.2	27.7	28.6	29.0	27.3	28.2	27.7	28.5	28.9	
8H	27.3	28.2	27.7	28.5	28.9	27.2	28.1	27.7	28.4	28.8	
12H	27.3	28.0	27.7	28.4	28.8	27.2	28.0	27.6	28.4	28.8	
8H 4H	27.3	28.2	27.7	28.5	28.9	27.3	28.1	27.7	28.5	28.9	
6H	27.5	28.2	27.9	28.6	29.0	27.4	28.1	27.8	28.5	28.9	
8H	27.5	28.1	27.9	28.5	28.9	27.4	28.0	27.9	28.4	28.9	
12H	27.4	28.0	27.9	28.4	28.9	27.4	27.9	27.8	28.3	28.8	
12H 4H	27.3	28.1	27.7	28.4	28.9	27.2	28.0	27.7	28.4	28.8	
6H	27.4	28.1	27.9	28.5	28.9	27.4	28.0	27.8	28.4	28.9	
8H	27.4	28.0	27.9	28.4	28.9	27.4	27.9	27.9	28.3	28.8	
Variations with the observer position at spacings:											
S = 1.0H	+ 0.3 / - 0.3					+ 0.2 / - 0.3					
1.5H	+ 0.2 / - 0.4					+ 0.2 / - 0.4					
2.0H	+ 0.4 / - 0.4					+ 0.4 / - 0.4					

CIE Pub.117, 1000 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 0.0)

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

UTILIZATION FACTORS TABLE

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-8W-SW-40	WEIGHT:
SPEC.:8W 4000K	DIM.: L:657mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	59	47	40	58	47	40	57	46	40	34
0.80	69	58	50	68	57	50	66	56	50	43
1.00	78	67	60	76	66	60	74	68	59	52
1.25	85	75	68	83	74	68	81	73	67	60
1.50	90	80	74	88	80	73	85	78	72	65
2.00	97	89	83	95	87	82	91	85	80	73
2.50	100	93	87	98	92	87	95	89	85	77
3.00	104	97	92	101	96	91	98	93	89	81
4.00	107	102	98	105	100	97	101	97	94	85
5.00	110	105	102	107	103	100	103	100	97	88
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16


γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

ISOCANDELA DIAGRAM

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-8W-SW-40	WEIGHT:
SPEC.:8W 4000K	DIM.: L:657mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

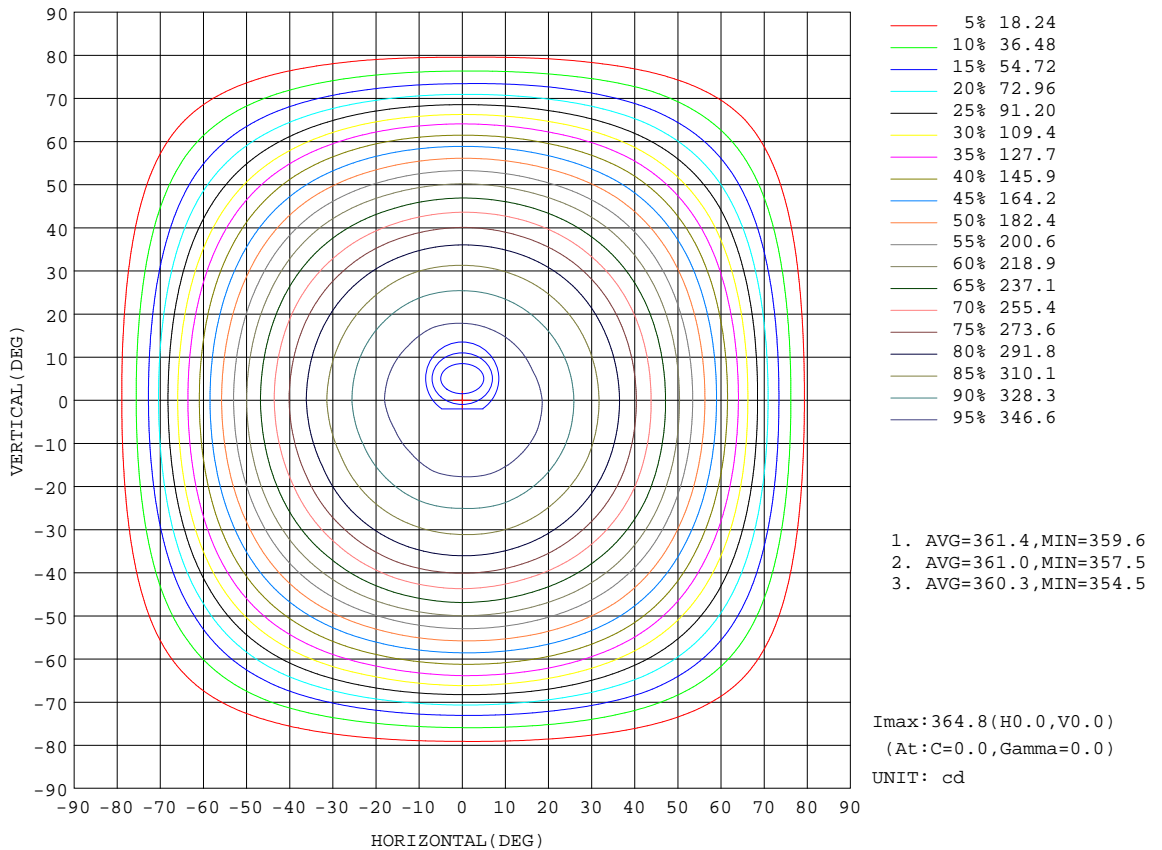

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16


γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

AAI Figure

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-8W-SW-40	WEIGHT:
SPEC.:8W 4000K	DIM.: L:657mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

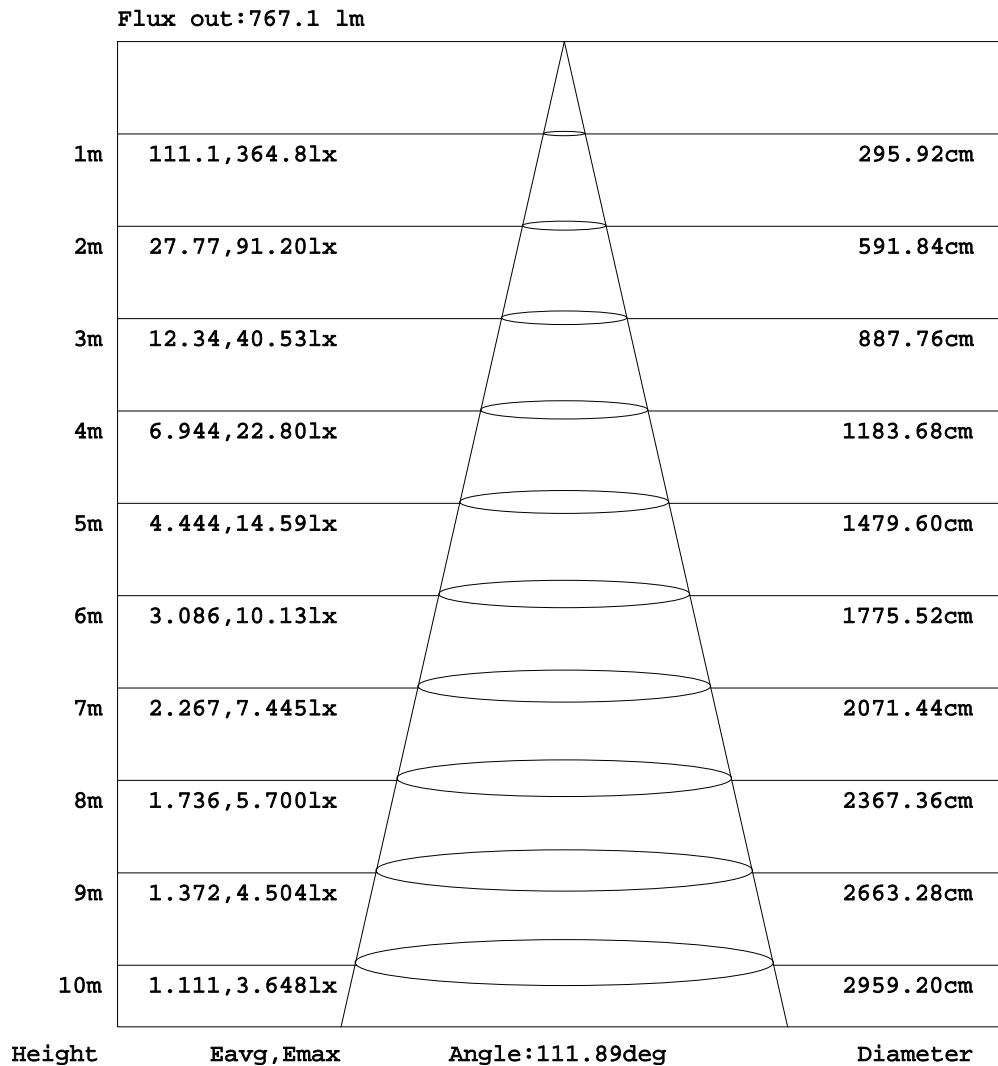

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16


γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

ISOLUX DIAGRAM

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-8W-SW-40	WEIGHT:
SPEC.:8W 4000K	DIM.: L:657mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

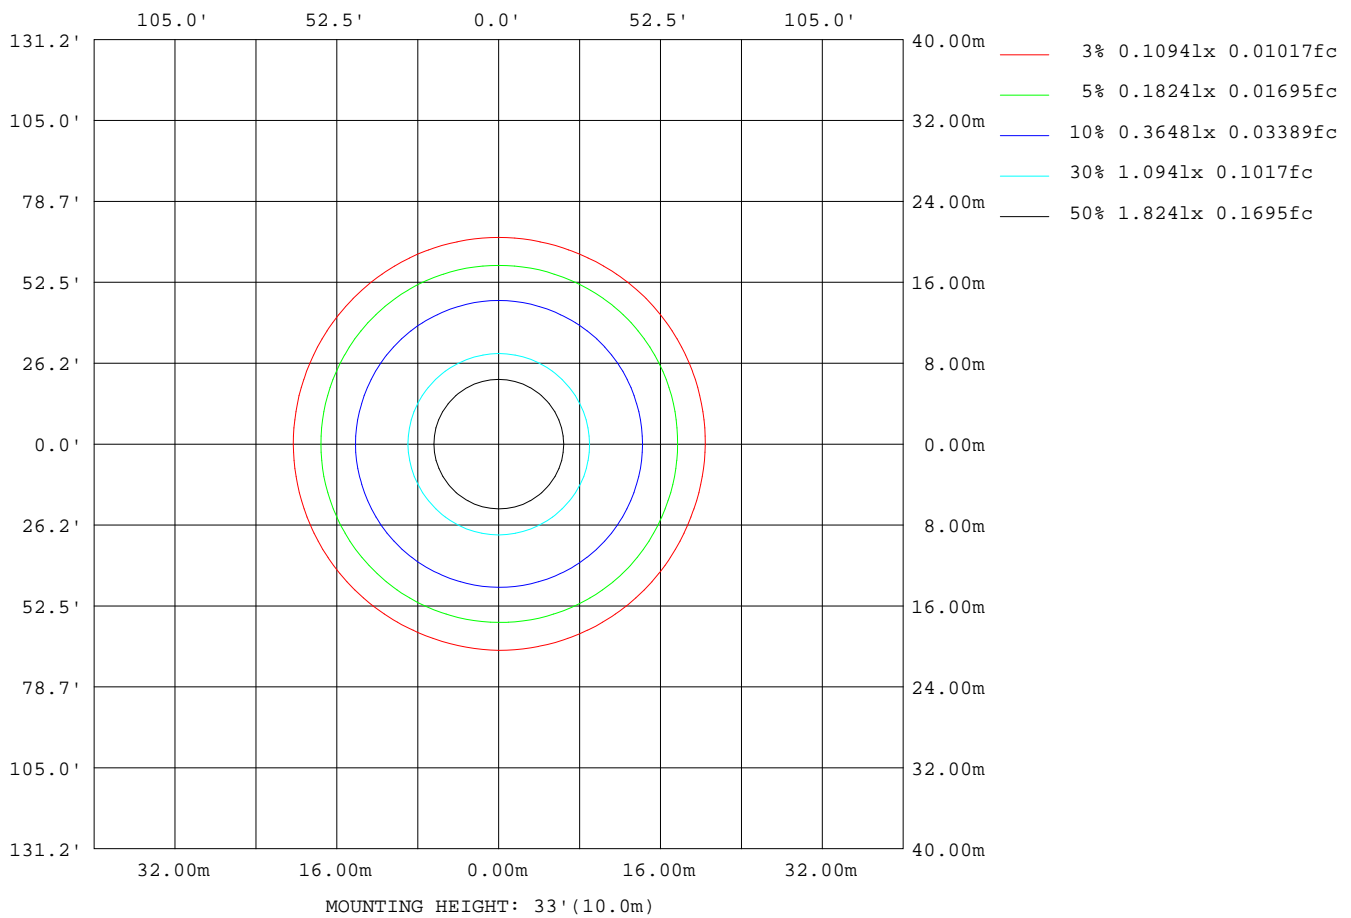


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

Planar Illuminance Curve

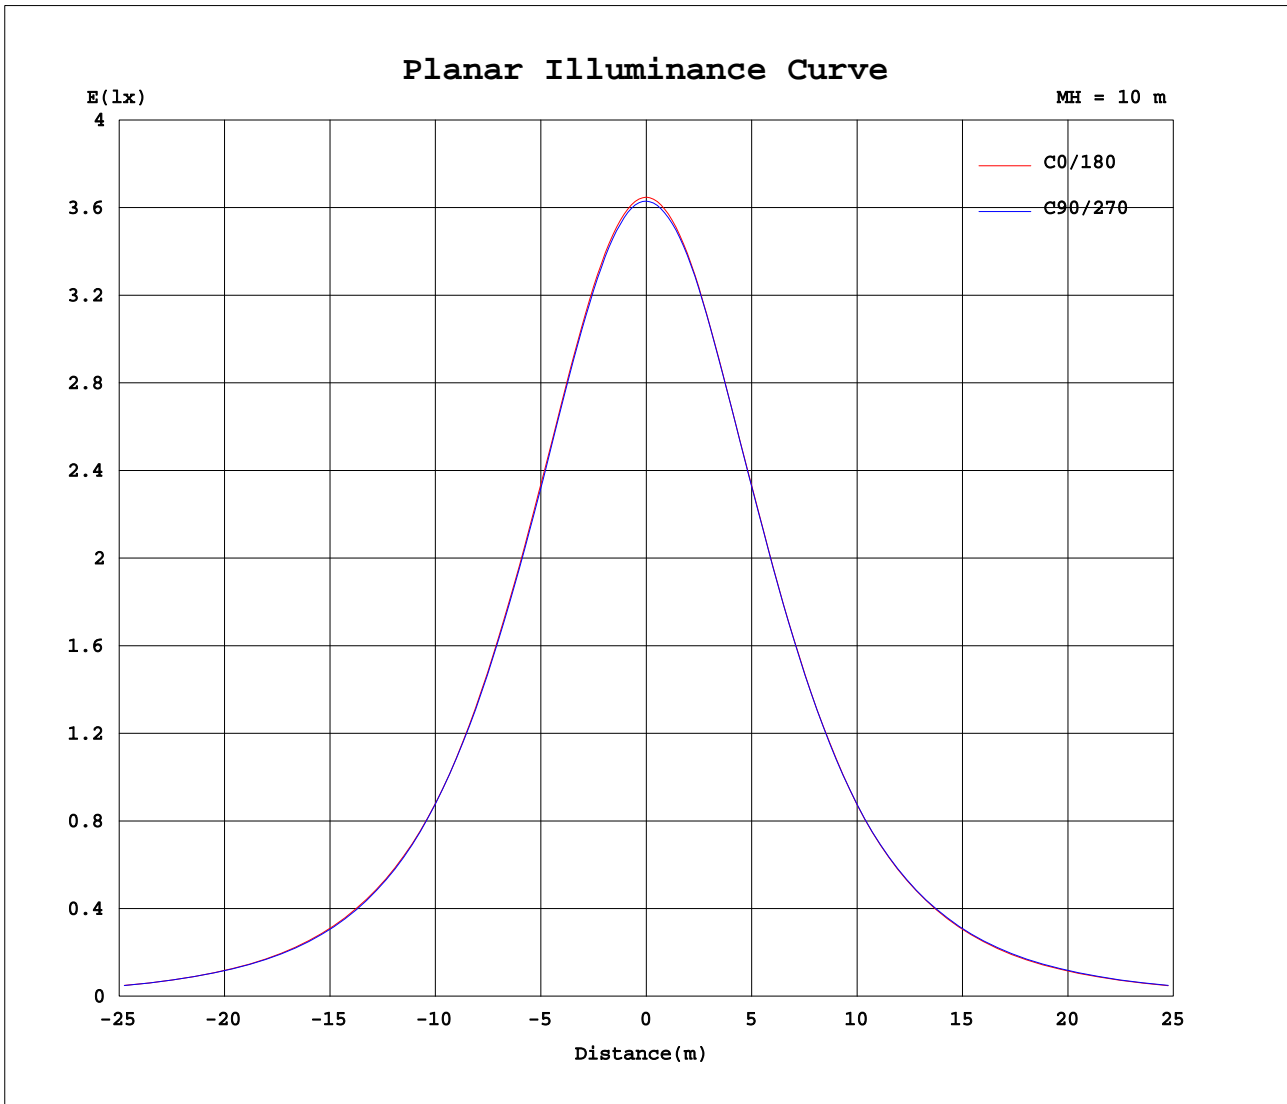

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 24.5DEG
 Operators: William
 Test Date: 2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity: 65.7%
 Test Distance: 26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: LED TRI-PROOF LIGHT	TYPE:BAWATY-8W-SW-40	WEIGHT:
SPEC.:8W 4000K	DIM.: L:657mm	SERIAL No.:
MFR.: DIMON TECHNOLOGY LTD	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	365	364	364	364	363	363	362	362	365	364	364	364	363	363	362	362			
5	363	363	363	363	362	362	361	361	363	363	362	362	362	361	361	361			
10	360	360	360	359	358	358	357	358	360	359	358	359	359	358	358	358			
15	353	353	353	352	351	351	351	351	352	352	352	352	352	352	351	351			
20	343	344	343	343	342	342	340	340	342	342	342	343	342	342	342	342			
25	331	331	330	330	329	329	328	328	330	330	330	330	329	329	329	330			
30	316	316	315	315	314	314	313	313	315	314	314	315	315	315	315	315			
35	298	298	297	297	296	296	295	294	296	296	296	296	296	296	297	297			
40	275	276	274	274	274	274	272	272	274	274	273	273	274	274	274	275			
45	249	250	248	247	248	247	245	245	247	247	246	246	248	248	248	249			
50	221	221	220	219	219	217	217	217	219	218	219	219	220	219	221	221			
55	190	190	190	189	188	186	187	186	188	187	188	189	190	189	191	191			
60	157	156	157	156	155	153	153	152	153	153	155	156	156	156	159	159			
65	120	118	119	119	119	116	116	117	117	117	118	119	120	120	122	121			
70	80.0	80.1	80.0	79.3	77.8	77.4	76.9	74.1	76.4	77.9	78.2	79.6	80.2	81.0	83.0	83.3			
75	44.6	44.9	44.5	43.8	42.0	41.8	41.4	39.5	40.2	43.3	44.6	44.3	45.0	45.8	48.1	47.1			
80	14.9	15.9	15.5	15.0	15.1	14.2	14.8	13.0	14.0	15.2	16.1	16.9	15.6	17.5	18.0	17.9			
85	2.70	2.43	2.30	2.07	1.85	1.81	1.71	1.78	1.92	2.38	2.50	3.06	2.66	2.76	2.92	3.29			
90	0.07	0.06	0.03	0.04	0.03	0.04	0.04	0.03	0.02	0.29	0.02	0.02	0.11	0.01	0.31	0.12			
95	0.02	0.02	0.03	0.03	0.03	0.03	0.02	0.03	0.03	0.09	0.03	0.03	0.02	0.03	0.02	0.03			
100	0.02	0.02	0.03	0.03	0.03	0.03	0.03	0.03	0.07	0.07	0.07	0.07	0.07	0.06	0.06	0.06			
105	0.02	0.03	0.03	0.04	0.03	0.04	0.03	0.03	0.13	0.12	0.12	0.13	0.12	0.13	0.13	0.12			
110	0.02	0.03	0.02	0.04	0.04	0.04	0.03	0.03	0.20	0.17	0.18	0.19	0.19	0.19	0.18	0.18			
115	0.04	0.05	0.05	0.05	0.06	0.04	0.04	0.06	0.26	0.25	0.25	0.25	0.25	0.25	0.25	0.25			
120	0.13	0.10	0.13	0.12	0.11	0.09	0.10	0.10	0.31	0.31	0.30	0.28	0.32	0.31	0.33	0.30			
125	0.19	0.17	0.17	0.21	0.20	0.18	0.16	0.17	0.33	0.33	0.31	0.29	0.33	0.32	0.33	0.33			
130	0.27	0.25	0.25	0.29	0.28	0.25	0.21	0.26	0.38	0.34	0.33	0.31	0.34	0.33	0.35	0.35			
135	0.38	0.32	0.33	0.38	0.37	0.34	0.27	0.32	0.40	0.35	0.34	0.36	0.40	0.36	0.38	0.38			
140	0.50	0.45	0.44	0.51	0.50	0.50	0.39	0.47	0.44	0.40	0.36	0.40	0.41	0.42	0.41	0.41			
145	0.56	0.54	0.52	0.60	0.58	0.56	0.51	0.52	0.47	0.44	0.41	0.48	0.50	0.50	0.46	0.47			
150	0.62	0.63	0.63	0.64	0.63	0.64	0.59	0.56	0.54	0.51	0.49	0.56	0.57	0.57	0.57	0.54			
155	0.66	0.67	0.66	0.67	0.64	0.65	0.65	0.63	0.62	0.59	0.59	0.63	0.61	0.63	0.60	0.63			
160	0.69	0.68	0.69	0.69	0.67	0.67	0.67	0.66	0.66	0.64	0.63	0.67	0.69	0.65	0.66	0.64			
165	0.76	0.74	0.74	0.75	0.76	0.71	0.72	0.72	0.68	0.69	0.67	0.69	0.71	0.70	0.71	0.68			
170	0.78	0.77	0.79	0.82	0.82	0.78	0.77	0.78	0.73	0.74	0.73	0.76	0.76	0.78	0.79	0.74			
175	0.83	0.80	0.85	0.87	0.86	0.82	0.82	0.80	0.81	0.79	0.79	0.83	0.82	0.82	0.82	0.79			
180	0.85	0.81	0.85	0.87	0.85	0.82	0.82	0.80	0.82	0.85	0.81	0.85	0.86	0.86	0.82	0.83			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-12-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Checker: DENNY

Assessor: JOE