


MU040I180AQI22

Features

- 1 LED channel,100% dimming Output Current can be set to from 200mA to 1800mA
- Soft light Dimming Range 0.1%~100%
For linear dimming curve, the minimum dimming level is 0.1%
For logarithmic dimming curve, the minimum dimming level is 0.1%
- Support DALI Dimming
- Dim-to-off with Standby Power<0.3 W
- Constant Power Maximum is 40W
- Protection: OTP, SCP, NLP,OPP
- Mode of wiring: At the bottom of wiring
- UL Class 2,IP20
- 5-year warranty

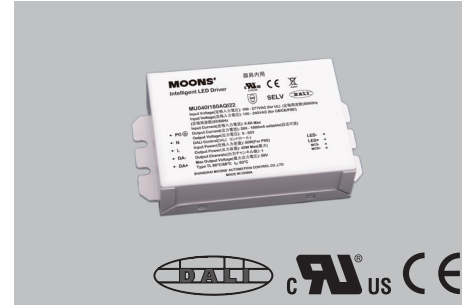

126 × 76 × 30mm

Electrical Specifications

| | |
|--|--|
| Rated input voltage range | 90-305 VAC |
| Maximum input voltage range | 90 - 305 V |
| Input voltage frequency | 50 / 60 Hz |
| Leakage current | <750uA |
| Output voltage range | 8 - 50 V |
| Output current | 200-1800mA |
| Maxium input power | <50W |
| Efficiency typical value (230V,50Hz,full loaded ①) | 86 - 88 % |
| Power factor (230V,50Hz,full loaded ①) | >0.95 |
| Stand-by power consumption ② | <0.3W |
| THD(230V,50Hz,full loaded ①) | <13% |
| Start-up time (230V,50Hz,full loaded) | <0.5S |
| Start-up time (120V,50Hz,full loaded) | <1S |
| The maximum setup current precision | ± 5% |
| Input inrush current | <15A |
| Dimming range | 0.1 -100% |
| Withstand Voltage I/P-O/P | 3750 V |
| Withstand Voltage I/P-FG | 1875 V |
| Withstand Voltage O/P-FG | 500V |
| Surge L/N-earth, L-N | 2KV,1KV |
| Operating Temp., Humidity | -25℃~+63℃,20%~95%RH |
| Storage Temp.,Humidity | -40℃~+85℃,10%~95%RH |
| Lifetime | ≥50000hours@Tc=75℃ at 120VAC input,100% load |
| Weight | 360g |
| Reference dimension | 126 × 76 × 30 mm |

Model Specifications

| Type | Output Current | Output Voltage | Output Power | Input Power (230V,50Hz) | Efficiency | Case Temperature | Ambient Temperature |
|----------------|----------------|----------------|--------------|-------------------------|------------|------------------|---------------------|
| MU040I180AQI22 | 800 mA | 50 V | 40.0 | 45.5 | 87.9% | 86℃ | -25 - 63℃ |
| | 900 mA | 44 V | 39.6 | 45.1 | 87.8% | 86℃ | -25 - 63℃ |
| | 1000 mA | 40 V | 40.0 | 45.5 | 87.7% | 86℃ | -25 - 63℃ |
| | 1100 mA | 36 V | 39.6 | 45.2 | 87.6% | 86℃ | -25 - 63℃ |
| | 1200 mA | 33 V | 39.6 | 45.2 | 87.6% | 86℃ | -25 - 63℃ |
| | 1300 mA | 31 V | 40.3 | 45.9 | 87.8% | 86℃ | -25 - 63℃ |
| | 1400 mA | 29 V | 40.6 | 46.4 | 87.5% | 86℃ | -25 - 63℃ |
| | 1500 mA | 27 V | 40.5 | 46.4 | 87.3% | 86℃ | -25 - 63℃ |
| | 1600 mA | 25 V | 40.0 | 46.1 | 86.8% | 86℃ | -25 - 63℃ |
| | 1700 mA | 24 V | 40.8 | 47.2 | 86.4% | 86℃ | -25 - 63℃ |
| 1800 mA | 22 V | 39.6 | 45.9 | 86.3% | 86℃ | -25 - 63℃ | |

*1: Load:50V*800mA

*2: Stand-by power consumption 110V<50mW, 230V<200mW

■ Safety & EMC Compliance

| | |
|-------------------------------------|--|
| CUL | UL8750,UL1310,CAN/CSA-C22.2 NO.223-M91 |
| CE | EN61347-1,EN61347-2-13 |
| Conducted Emissions | FCC Part15 Class B /EN55015 |
| Radiated Emissions | FCC Part15 Class B /EN55015 |
| Harmonic Current Emissions | EN 61000-3-2 |
| Voltage Fluctuations and Flicker | EN 61000-3-3 |
| Electrostatic Discharge | EN 61000-4-2 |
| RFE Field Susceptibility | EN 61000-4-3 |
| Electrical Fast Transient | EN 61000-4-4 |
| Conducted Radio Frequency | EN 61000-4-6 |
| Power Frequency Magnetic Field Test | EN 61000-4-8 |
| Voltage Dips | EN 61000-4-11 |
| Electromagnetic Immunity | EN61547 |

■ Function Description

- DALI Standards

Comply with IEC62386-102(2.0), IEC62386-207.

- SwitchDIM (with memory function)---push dimming

SwitchDIM means that you can use two lines to connect L and N to DA+ and DA- respectively, and add a switch in series to either of the two lines to complete the function of ON/OFF and dimming. Short press(<0.6s) can turn on/off the driver, and long press can adjust the dimming level. When several drivers are connected together and controlled by one switch, press the switch for 10s, all the drivers are dimmed to 50% at the same time.

- MCS technology

Connect Smartkey to the driver through MCS(Multifunctional Configuration Settings) ports. With MOONS' Configurator software, you can set the MAX current of the driver(each step is 1 mA),dimming curve type, etc.Please refer to specification of Smartkey to get specific information.

- Temperature Detection

In order to protect the LED, the temperature of LED is detected by a NTC. When the temperature exceeds the point which can be set by Smartkey, the output current can be decreased automatically, but not less than 25%.

- Constant Output Power

The driver can satisfy the curve of constant output power within a large range of output current and voltage.

- Protection

Thermal Protection

When the temperature of the inside PCB exceeds 110℃ , output current will be decreased to 50%. And it can not recover until the temperature drops to 70℃ .

Short-circuit Protection

Once the output short-circuits, the output will be cut off automatically. Then the driver will try to restart every 4s.

No-load Protection

The driver operating with no load will not be damaged, and it will try to restart every 4s. So the driver supports hot plug in.

Over-Power Protection

If the total power exceeds 50W, the output current of each channel will decrease to 50% , and then the maximum output power is increased to 40W gradually.

- DALI Signal Abnormality

If the signal of DALI is abnormal, including open-circuit and short-circuit, the output will recover to the preset maximum value.

- Online Update


Connect Smartkey to PC through a USB port, then connect Smartkey to the driver correctly to update.

Please refer to the specification of Smartkey.


*1: Recommended manufacture and type of the NTC

Manufacture: Thinking TSM2A473J409ARZA(SMD) \ VISHAY NTC0805e4473JXT \ MURATA NCP21WB473J03RA



Mechanical Outline (unit: mm)

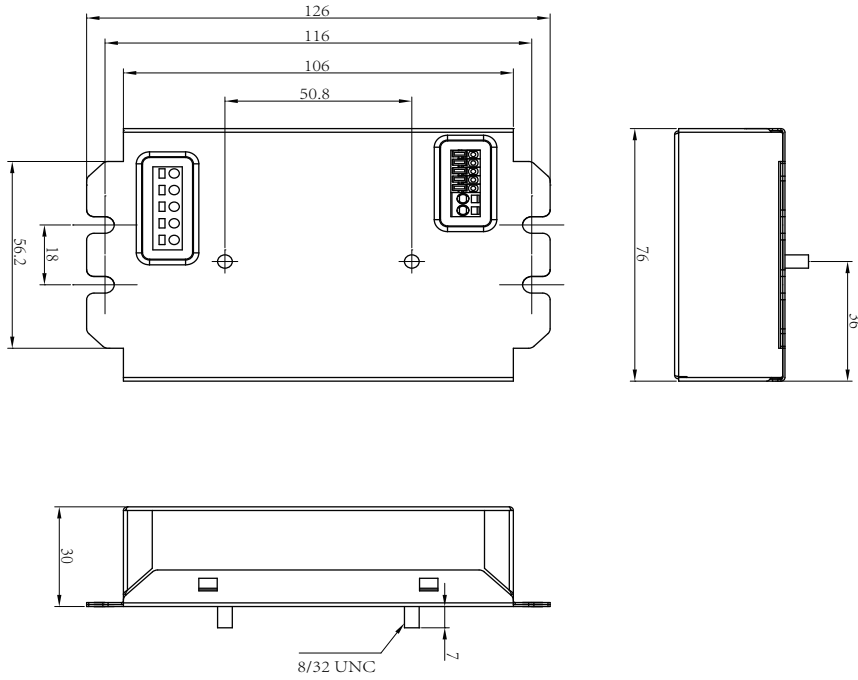


Ports

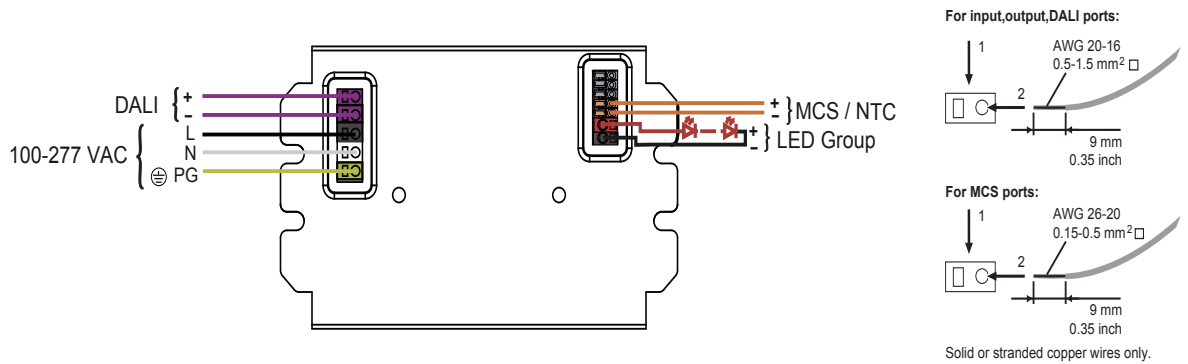


Test curve

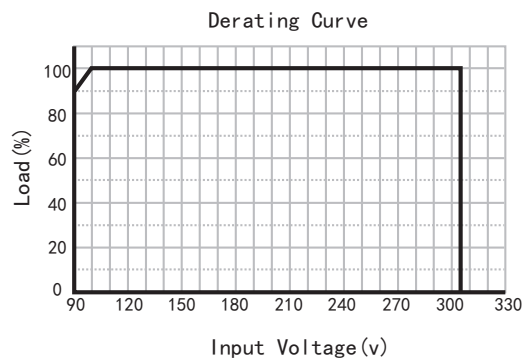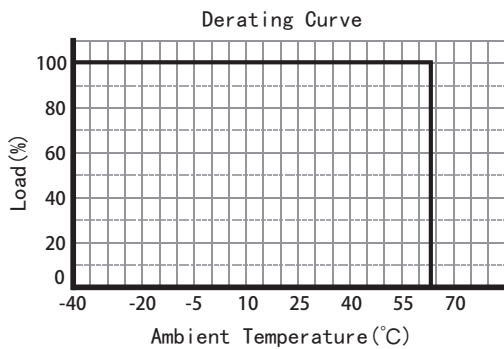


Lifetime VS.Tcase

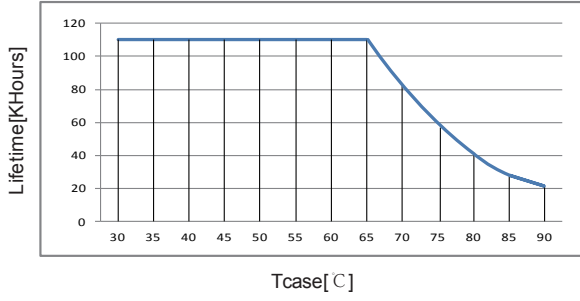


V/I OPERATING RANGE

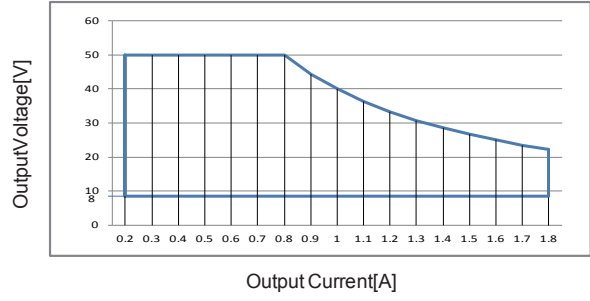


Power Factor Curve

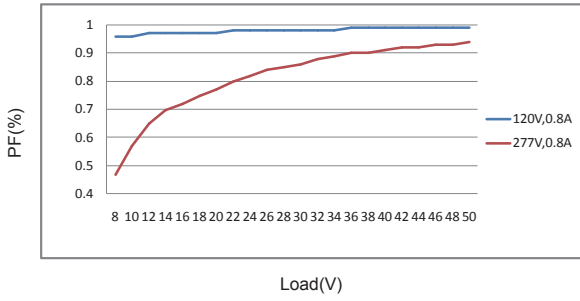

Current Total Harmonic Curve

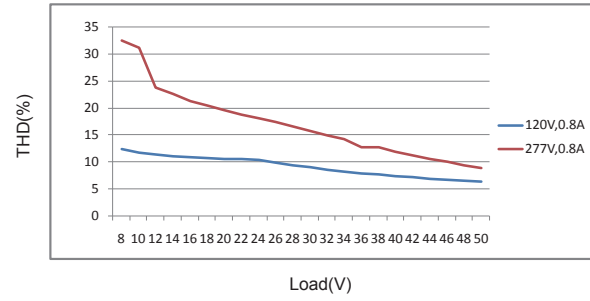

Efficiency Curve

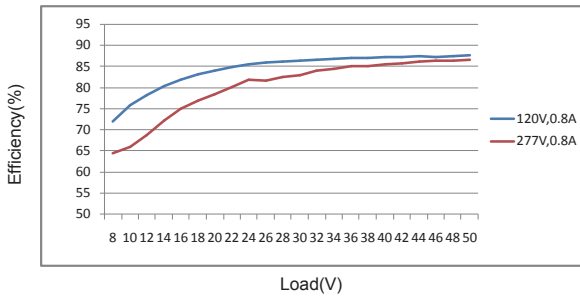

DALI Curve

