





Fixture type: LED Ceiling Light Series

### 1. Accessories


1.1 Check accessories(For one lighting fixture):

Accessories	A	B	C	D
Photos				
QTY(PCS)	3	3	3	3

A: Plastic expansion anchor;  
 B: Silicone gasket;  
 C: Metal gasket;  
 D: Mounting Screw.

### 2. Installation

- 2.1 Refer to the lighting distribution design drawing and the lighting fixture;
- 2.2 The fixture must be properly grounded to avoid accidental power leakage and electric shock. The fixture must be installed by a qualified electrician. Before installing be sure to turn the power off;
- 2.3 Loosen the screw of the lighting shade by the screwdriver as below;

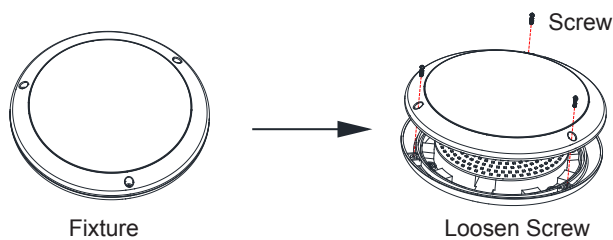

2.4 Finish below mounting step;

Turn Power OFF!

Lighting base

Accessories: A\B\C\D

- ①: Hold lighting base against the wall and mark drill holes, paying attention to any existing wiring in the wall. Drill the holes( $\phi 6\text{mm}$ ), insert plastic expansion anchor(accessories A);
- ②: Put the load wire through the lighting base holes;
- ③: Screw the lighting base into place;
- ④: Connect the the load wire to the connection terminal according to connection-wire mark.
- ⑤: Fit plastic shade and turn it clockwise, test it for proper operation.

Voltage: 200-240V/AC

⑥: Turn the power on to test the installation and wiring.