

IP66L3.5


IP54L3.5

Water protected


Suspended

Wall

Surface

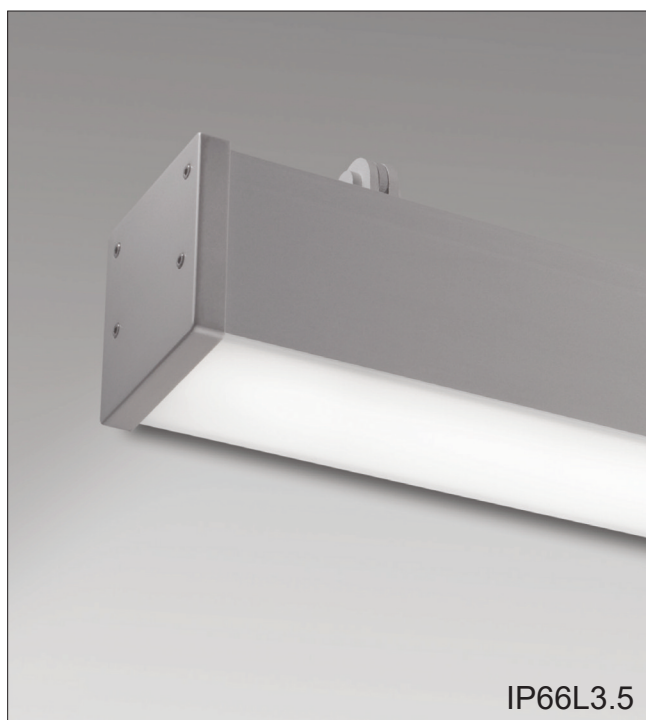

Dimensions

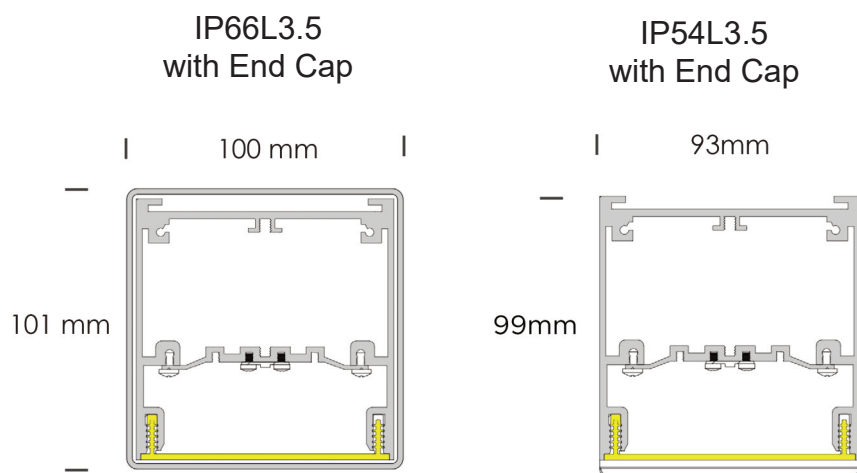


IP66L3.5 & IP54L3.5

Suspended, Wall, Surface


1. Base Model

IP66L3.5-S	Suspended - IP66
IP66L3.5-WM	Articulating Wall Mount - IP66
IP66L3.5-SM	Surface Mounted (Indirect) - IP66
IP54L3.5-S	Suspended - IP54
IP54L3.5-WM	Articulating Wall Mount - IP54
IP54L3.5-SM	Surface Mounted (Indirect) - IP54


IP66L3.5-S & IP54L3.5-S
Suspended



IP66L3.5-SM & IP54L3.5-SM
Surface Mount



IP66L3.5-WM & IP54L3.5-WM
Articulating Wall Mount



2. Run Length

xxxM **1.5M maximum** Separate fixtures can be joined end to end.

3. LED Lamping

1 set x LED T5 32W 5feet 5760 lm 180 lm /w CRI >80
2 set x LED T5 32W 5feet 5760 lm 180 lm /w CRI >80

STD - **xxxK** (example: STD-4000K)

HI - **xxxK** (example: HI-4000K)

CCT: 3000K 3500K 4000K Option: 2700K 5000K 5700K 6500K

CV - **xxxK**

Constant Current DC LED T5 for DALI or 0-10V Dimming Control
Contact factory for detail

TW

Tunable White (2700K - 5700K)

Contact factory for detail

RGBW

RGB+WHITE - 24/12VDC

Contact factory for detail

4. Driver

0/1-10V	0/1-10V dimming
DALI	DALI dimming
NONDIM	Non-dimmable
OTHER	(Consult factory for options)

5. Finish

AL	Standard, natural aluminum
BK	Black powdercoat
WH	White powdercoat
Custom / ____	Custom powdercoat

6. Additional options

EM	1.5 hour Emergency Kit
MS	Motion sensor
Others	Contact factory

IP66L3.5 & IP54L3.5

Suspended, Wall, Surface

Housing

100% recyclable, extruded architectural grade T6063 aluminum

Emergency

Luminaires can be wired for emergency circuit and/or emergency battery backup. Consult factory for options.

Finish


Standard finish is "Ultimate" aluminum - a smooth, clean and durable finish achieved from a deep-etch and two step clear anodizing process. White, Black, or custom powdercoat options are also available.



Suspension & Power



WH - WHITE



AL - ALUMINUM




Custom/____

Default canopy finish is to match fitting color, unless otherwise specified



BK - BLACK

2 x LED T5 Layout photo

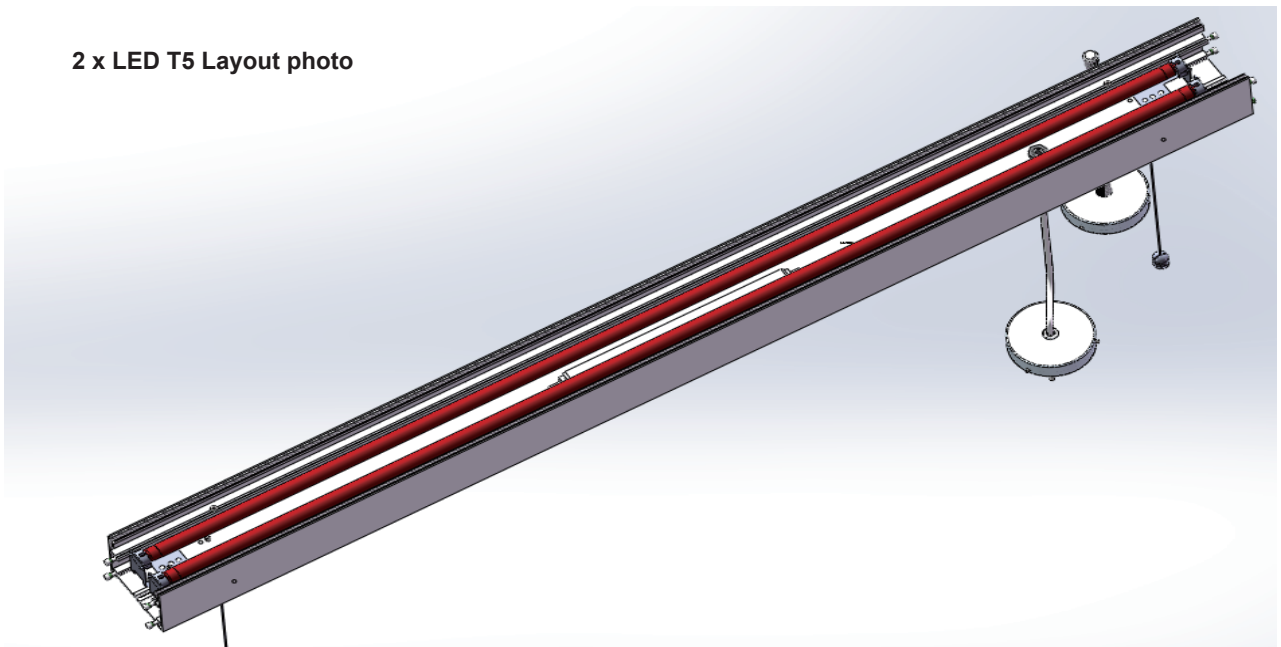

IP66L2.5 Surface mount


Installation Instructions

CAUTION:

ALL THE INSTALLATION MUST BE COMPLETED BY A QUALIFIED ELECTRICIAN !


NOTICE:

When installing or using this surface mount fixture basic safety precautions should be followed .Before installation of any luminary onto an electrical junction box, be sure to disconnect power.Check that luminary voltage and building voltage are the same.

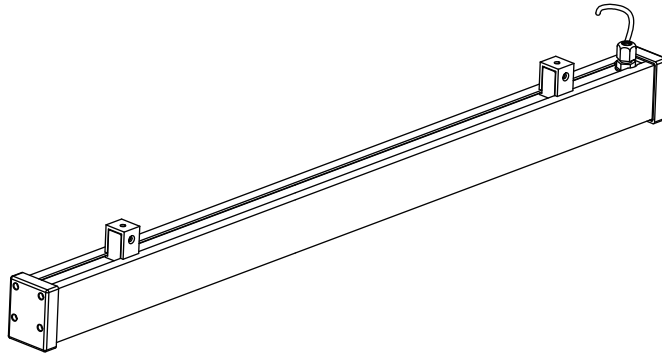


1 Turn off power at fuse box before proceeding

3 Install fixture to the mounting bracket with screws.



2 Install mounting bracket to the ceiling.

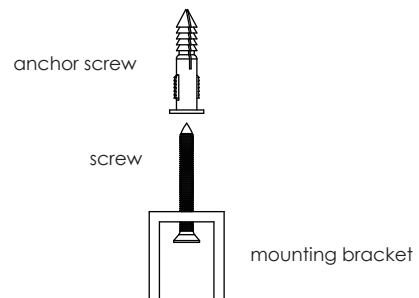


5 Find the right wiring based on below:

a. 1 circuits with dim -- 6 core RED - LIVE BLUE - NEUTRAL GREEN - EARTH WHITE - DIM LIVE BLACK - DIM NEUTRAL CLEAR - SPARE	b. 3 core grey, black or white BROWN - LIVE BLUE - NEUTRAL GREEN - EARTH
---	---

c. 3 core clear WHITE - LIVE BLACK - NEUTRAL GREEN - EARTH

4 Wiring diagram



6 Turn on power