

DRAMOMY

LED DOWNLIGHT SYSTEM

ONE LIGHT ENGINE FOR ALL
EASY TO SPECIFY
EASY TO INSTALL AND ADJUST
EASY TO MANAGE STOCK
EASY TO HAVE OPTIC CONTROL



Meticulous to every detail
To guarantee maximum eye comfort >

	Adjustable				Fixed				Wall Washer			
Picture&Name												
Cutout Diameter(mm)	Φ68 Φ100 Φ125 Φ150	68X68 96X96 122X122 147X147	Φ100 Φ125 Φ150	96X96 122X122 147X147	Φ100 Φ125 Φ150	96X96 122X122 147X147	Φ100 Φ125 Φ150	96X96 122X122 147X147				
Trim Diameter(mm)	Ø78 Ø110 Ø137 Ø162	78X78 107X107 134X134 159X159	Ø110 Ø137 Ø162	107X107 134X134 159X159	Ø110 Ø137 Ø162	107X107 134X134 159X159	Ø110 Ø137 Ø162	107X107 134X134 159X159				
Height (mm)	H: 98 H: 126 H: 157 H: 188	H: 98 H: 126 H: 157 H: 188	H: 126 H: 157 H: 188	H: 126 H: 157 H: 188	H: 126 H: 157 H: 188	H: 126 H: 157 H: 188	H: 126 H: 157 H: 188	H: 126 H: 157 H: 188				
Wattage	7.5W 13W 18W 25W 11W 18W 25W 38W	7.5W 13W 18W 25W 11W 18W 25W 38W	13W 18W 25W 18W 25W 38W	13W 18W 25W 18W 25W 38W	13W 18W 25W 18W 25W 38W	13W 18W 25W 18W 25W 38W	13W 18W 25W 18W 25W 38W	13W 18W 25W 18W 25W 38W				
Beam Angle	10 deg 24 deg 35 deg 40 deg 52 deg	10 deg 24 deg 35 deg 40 deg 52 deg	10 deg 24 deg 35 deg 40 deg 52 deg	10 deg 24 deg 35 deg 40 deg 52 deg	10 deg 24 deg 35 deg 40 deg 52 deg	Asymmetric optical distribution		Asymmetric optical distribution				
Colour Temperature	3000K 4000K 2700K 5000K	Standard 3000K 4000K Option 2700K 5000K	Standard 3000K 4000K Option 2700K 5000K	Standard 3000K 4000K Option 2700K 5000K	Standard 3000K 4000K Option 2700K 5000K	Standard 3000K 4000K Option 2700K 5000K	Standard 3000K 4000K Option 2700K 5000K	Standard 3000K 4000K Option 2700K 5000K				
Colour Rendering Index	CRI>90 CRI>83	CRI>90 CRI>83	CRI>90 CRI>83	CRI>90 CRI>83	CRI>90 CRI>83	CRI>90 CRI>83	Standard CRI>90 Option CRI>83	Standard CRI>90 Option CRI>83				
LED Driver	Standard ON-OFF Option PHASE DIM 1-10V DIM DALI DIM	Standard ON-OFF Option PHASE DIM 1-10V DIM DALI DIM	Standard ON-OFF Option PHASE DIM 1-10V DIM DALI DIM	Standard ON-OFF Option PHASE DIM 1-10V DIM DALI DIM	Standard ON-OFF Option PHASE DIM 1-10V DIM DALI DIM	Standard ON-OFF Option PHASE DIM 1-10V DIM DALI DIM	Standard ON-OFF Option PHASE DIM 1-10V DIM DALI DIM	Standard ON-OFF Option PHASE DIM 1-10V DIM DALI DIM				
Trimless Version												
Secondary Reflector	Specular Dark Specular Chrome Black Matt White Black Gold	Specular Dark Specular Chrome Black	Matt White Black Gold	Matt White Black Gold	Matt							
Anti-glare Accessory												
Decoration Accessory Color film												



30°
355°

30°
355°



DRAMOMY ROUND Downlight

ADJUSTABLE


Four sizes with LED wattages 7.5W-38W.
20°, 40°, and 50° beam angles are available
10° beam angle is optional for SRA68.
30° tilt and 355° rotation.

FIXED

A combination of deep recessed
secondary reflector and soft
lens creates visual comfort


WALL WASHER

Asymmetric wall washer reflector
evenly illuminates walls




TRIMLESS

Make your downlight
invisible in the ceiling.
Tidy design for architectural
project installation.

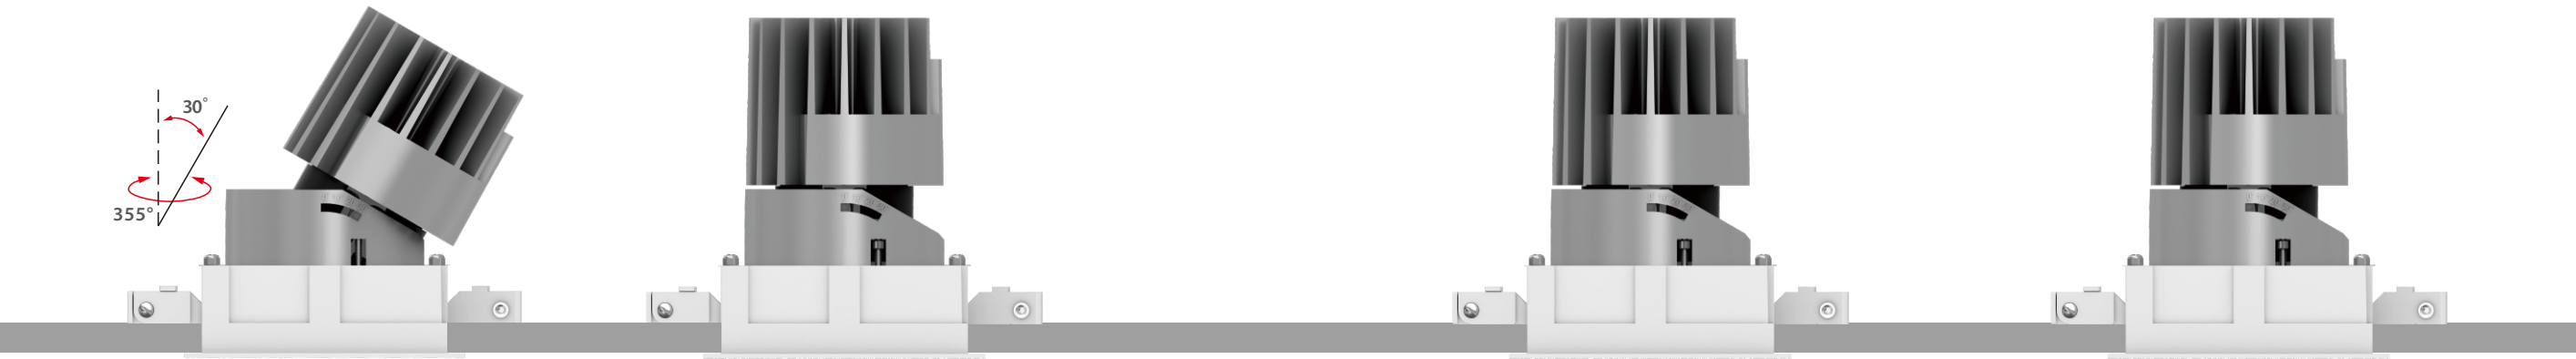

30°
355°



30°
355°

DRAMOMY SQUARE Downlight

ADJUSTABLE
Four sizes with LED wattages 7.5W-38W.
20°, 40°, and 50° beam angles are available
10° beam angle is optional for SRA68.
30° tilt and 355° rotation.

FIXED
A combination of deep recessed
secondary reflector and soft
lens creates visual comfort

WALL WASHER
Asymmetric wall washer reflector
evenly illuminates walls

TRIMLESS
Make your downlight
invisible in the ceiling.
Tidy design for architectural
project installation.

DRAMOMY

One light engine with various accessories
 Easy to specify
 Easy to manage stock
 Easy to install and adjust
 Easy to change reflector



Adjustable/Fixed/Wall Washer




Standard-Round


Trimless-Round

Standard-Square


Trimless-Square



Round-Adjustable



Round-Fixed



Round-Wall Washer



Square-Adjustable



Square-Fixed



Square-Wall Washer

Secondary Reflector



Specular Dark Specular Chrome Black Matt White Black Gold



Specular



Dark Specular



Chrome Black



Matt



White



Black



Gold




Specular



Dark Specular




Chrome Black




Matt



White




Black




Gold

Intelligent mechanical design creates easy adjustment and precise alignment.

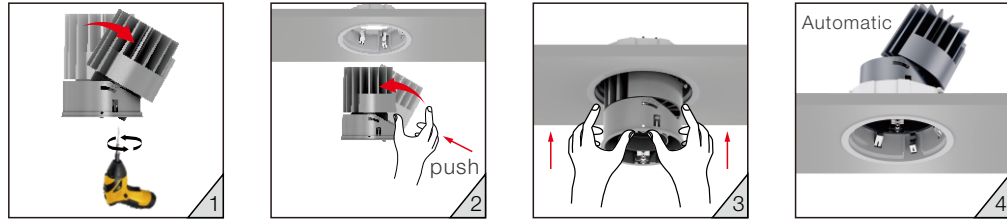


DRAMOMY

Smart mechanical design features precise angle alignment.
Artistical style meets architectural requirement.
Fixing screws can be rotated to match ceiling with different thickness.

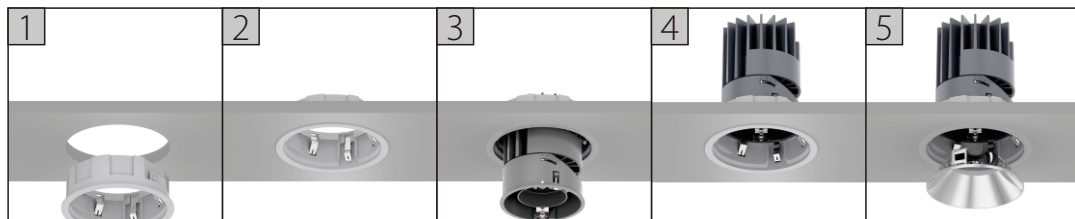


Technology Presents Arts

Ultra-narrow trim design leaves no flange between the secondary reflector and trim, meeting neat ceiling requirement.




Creative Ceiling Treatment

Installed easily and securely in the ceiling, using two screw fixing mechanisms.
Applying to 12-25mm thickness ceiling and to 1-12mm thickness ceiling with a fallen clip.

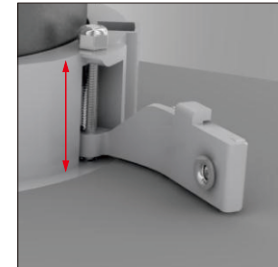


fit for ceiling thickness
12mm to 25mm

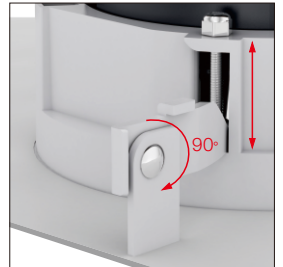

fit for ceiling thickness
1mm to 12mm

Easy to Adjust




Precision engineered adjustment mechanism achieves accurate angle alignment.

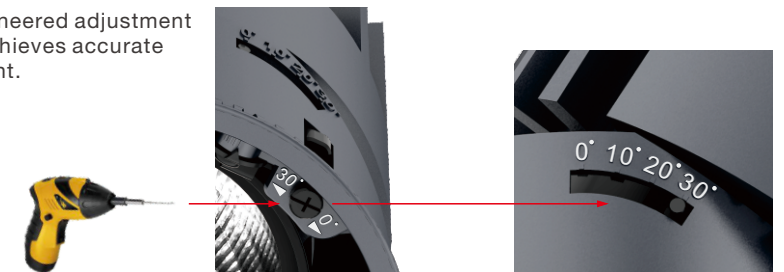

DRAMOMY

ADJUSTABLE




Meticulous to detail Interchangeable design
Best optics control
Guarantee maximal eye comfort

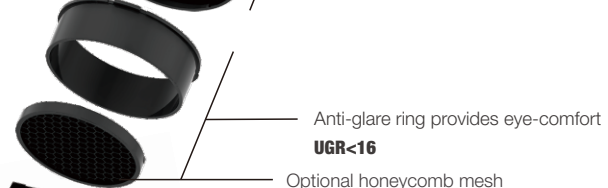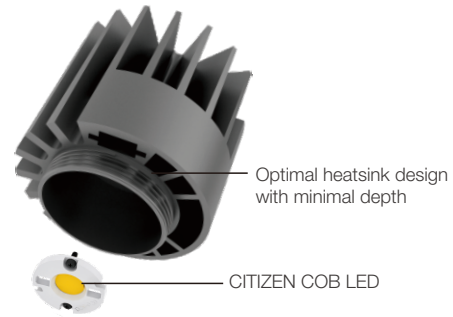

Trimless Version Available




Trimless Version Available

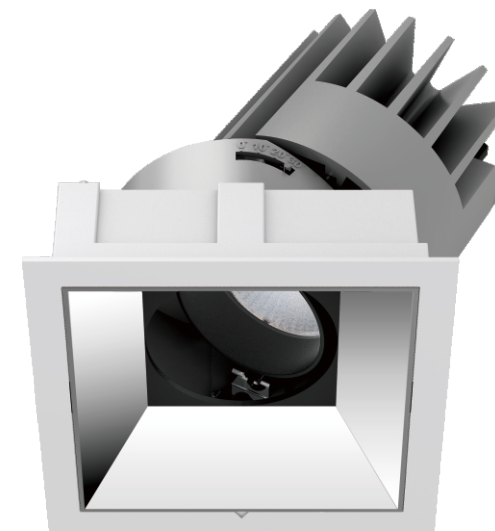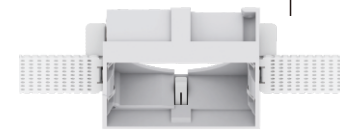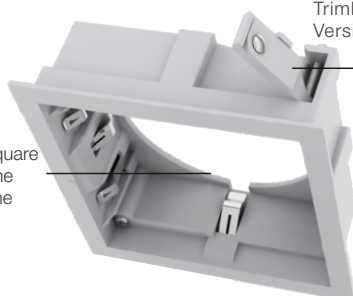



DRAMOMY

ADJUSTABLE

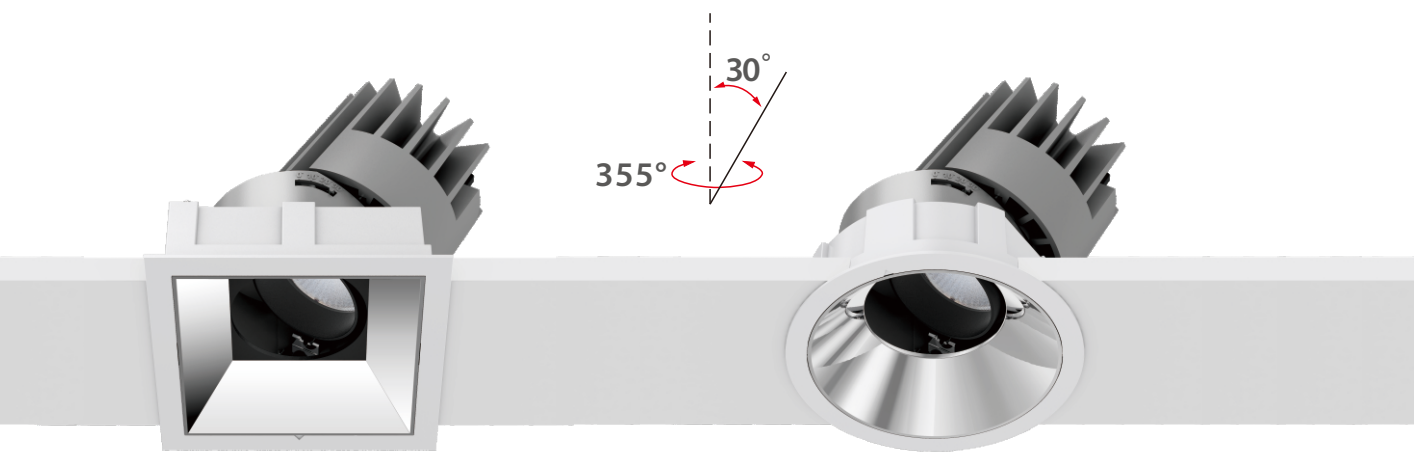

A versatile accent lighting solution.


Aesthetic design for architectural request.

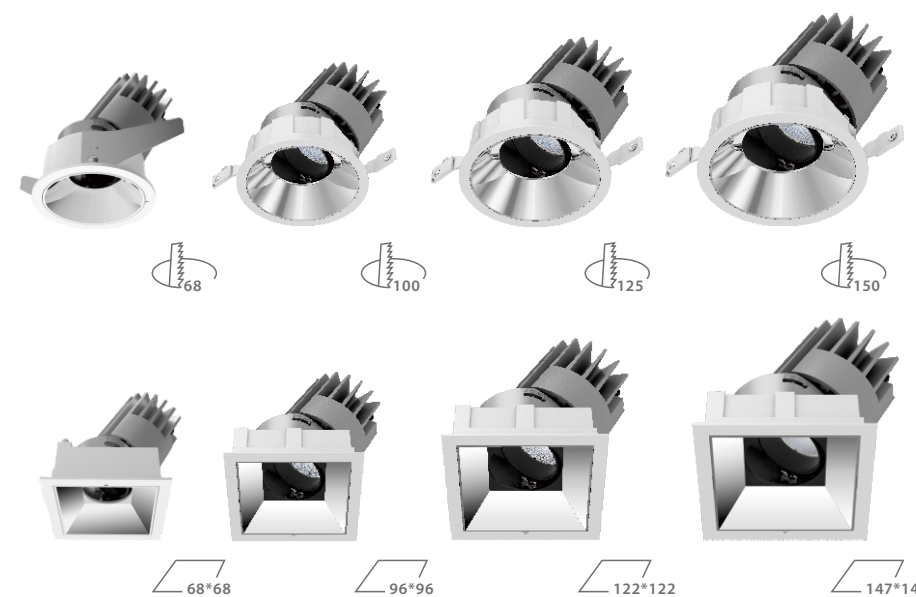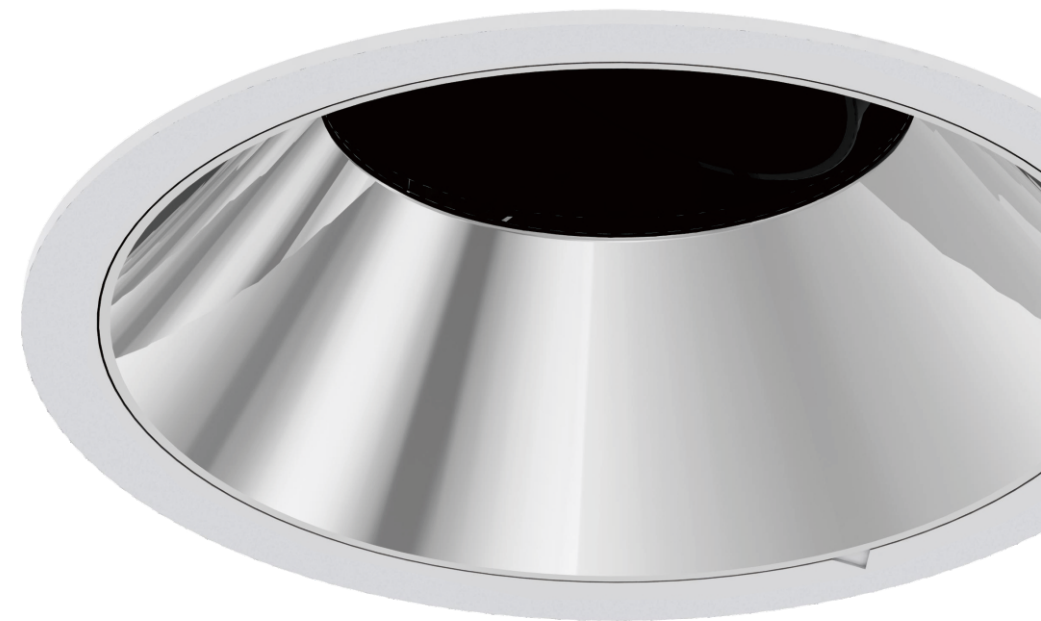

Aesthetic design trim available in round or square shape.
Four sizes with LED wattages 7.5W-38W.
30° tilt and 355° rotation.
Smart mechanical design ensures precise alignment.

DRAMOMY

LED Downlight-Adjustable

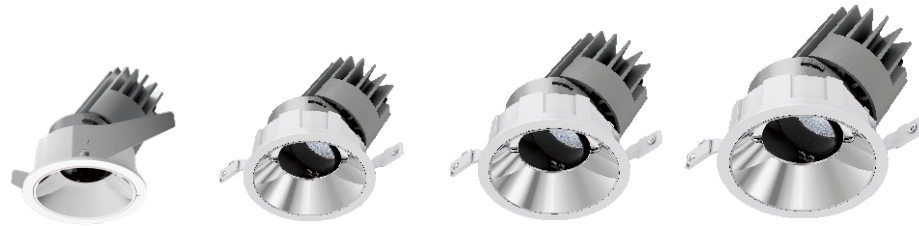

Function


- Full range of adjustable downlight, four sizes with LED wattages 7.5W-38W.
- Precision engineered adjustment mechanism, easy to adjust to specific angle.
- 30° tilt and 355° rotation.
- Thermally engineered heatsink creates highly efficient passive cooling system.
- Different colours of secondary reflector are available.
- Anti-glare accessory provides maximum eye comfort.
- Trimless installation downlight and accessory are available.
- 5 years guarantee



Trimless downlight version is optional.

Trim

Mounting Trim can be ordered seperately



(100/125/150)
Trim (Standard)

(100/125/150)
Trimless (Option)

Secondary Reflector



Specular (100/125/150) (Standard)
Dark Specular (100/125/150) (Option)
Chrome Black (100/125/150) (Option)
White (100/125/150) (Option)
Matt (100/125/150) (Option)
Black (100/125/150) (Option)
Gold (100/125/150) (Option)


Accessory



honeycomb


DRAMOMY

LED Downlight-Adjustable

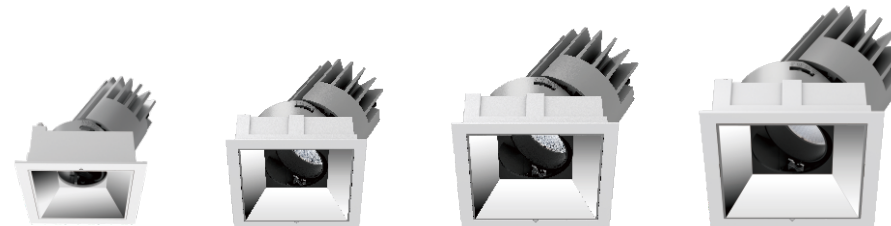

Function

- Full range of adjustable downlight, four sizes with LED wattages 7.5W-38W.
- Precision engineered adjustment mechanism, easy to adjust to specific angle.
- 30° tilt and 355° rotation.
- Thermally engineered heatsink creates highly efficient passive cooling system.
- Different colours of secondary reflector are available.
- Anti-glare accessory provides maximum eye comfort.
- Trimless installation downlight and accessory are available.
- 5 years guarantee

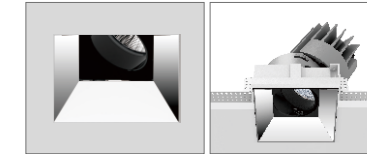

Trimless downlight version is optional.

Trim

Mounting Trim can be ordered seperately



(100/125/150)
Trim (Standard)

(100/125/150)
Trimless (Option)

Secondary Reflector



Specular (100/125/150) (Standard)
Dark Specular (100/125/150) (Option)
Chrome Black (100/125/150) (Option)
White (100/125/150) (Option)
Matt (100/125/150) (Option)
Black (100/125/150) (Option)
Gold (100/125/150) (Option)


Accessory



honeycomb



DRAMOMY-Trimless

LED Downlight-Adjustable

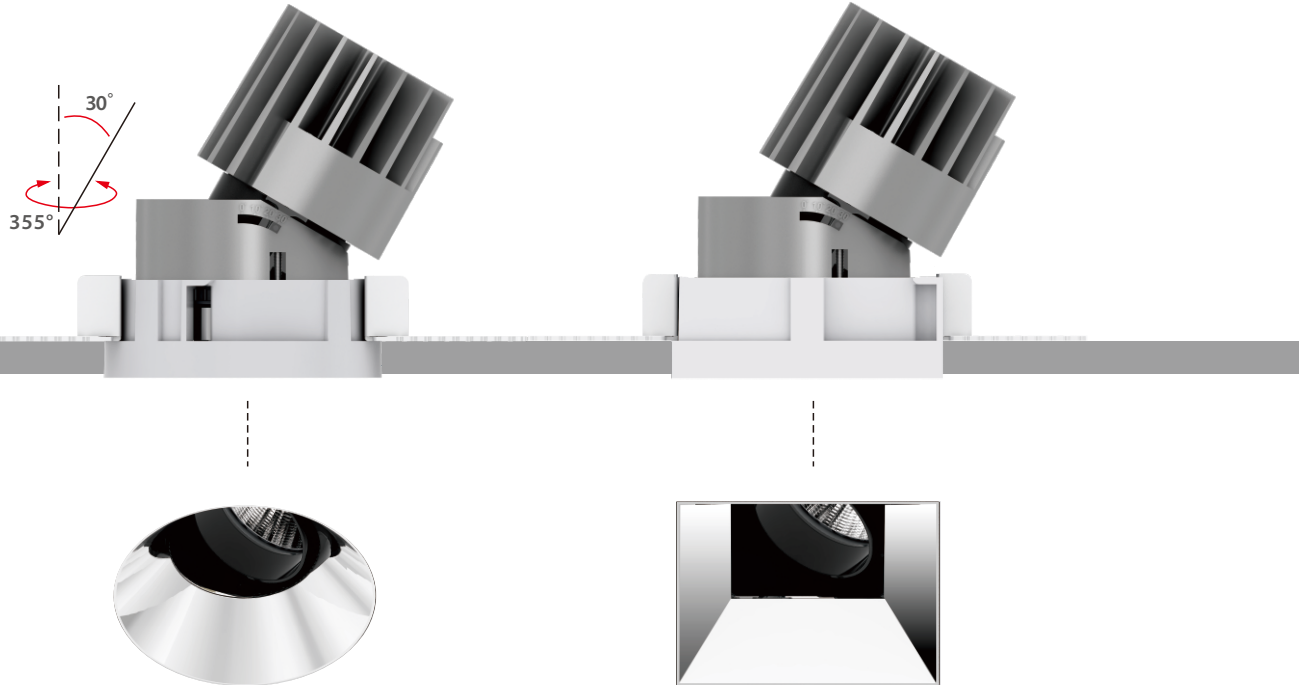


Trimless Version Available

Make your downlight invisible in the ceiling, fit for 12.5mm and 25mm thickness ceiling
Interchangeable downlight fixture and trimless accessory.
All technical datasheets are the same as adjustable series downlight (SRA and SSA, page 048-058).

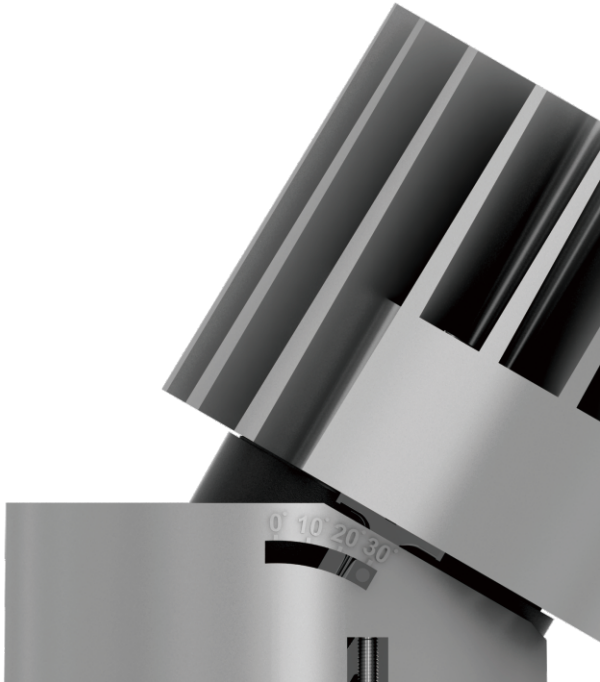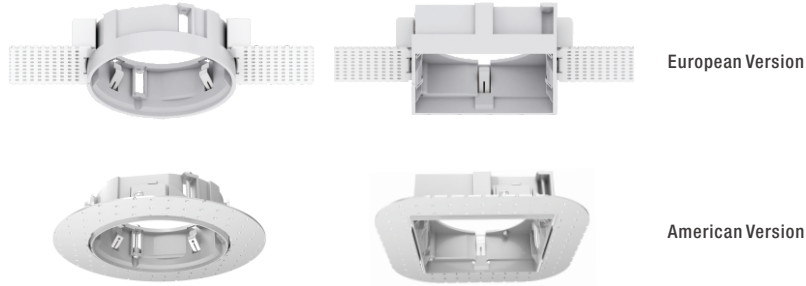



DRAMOMY-Fixed

Meticulous to detail Interchangeable design
Best optics control
Guarantee maximal eye comfort

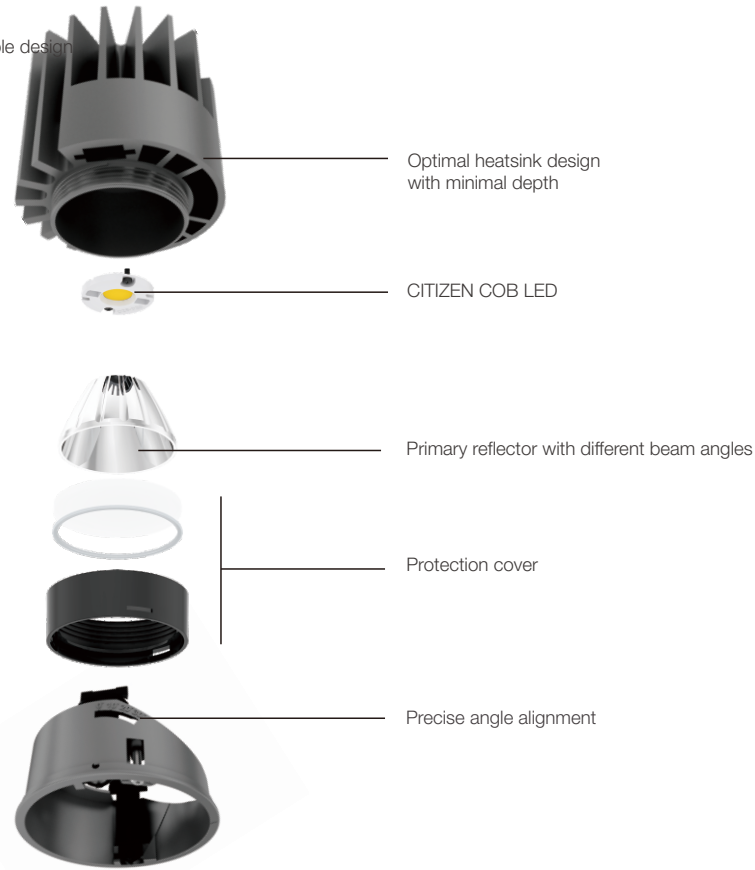


Trimless
Version Available

Trimless
Version Available

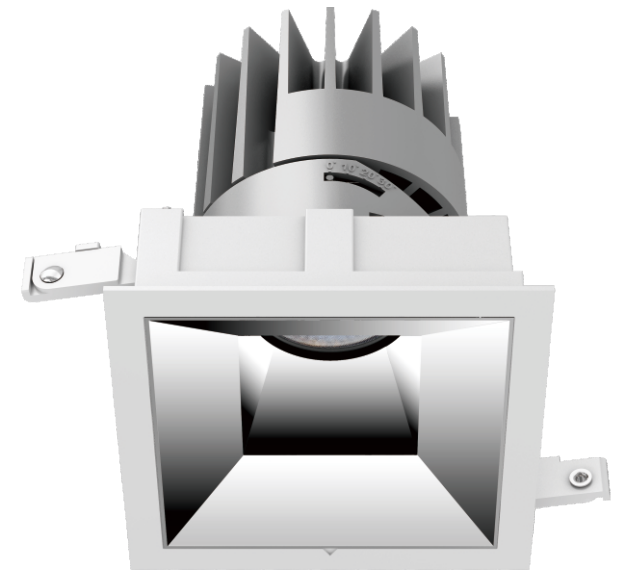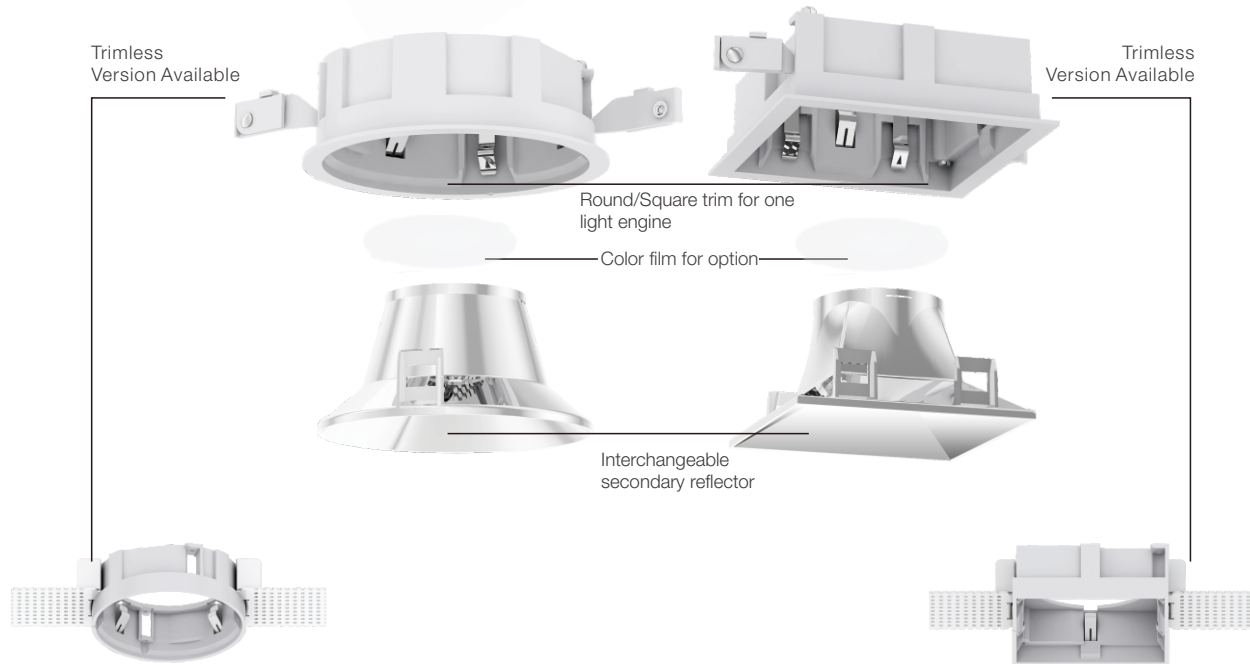



DRAMOMY-Fixed

DIMON
TECHNOLOGY

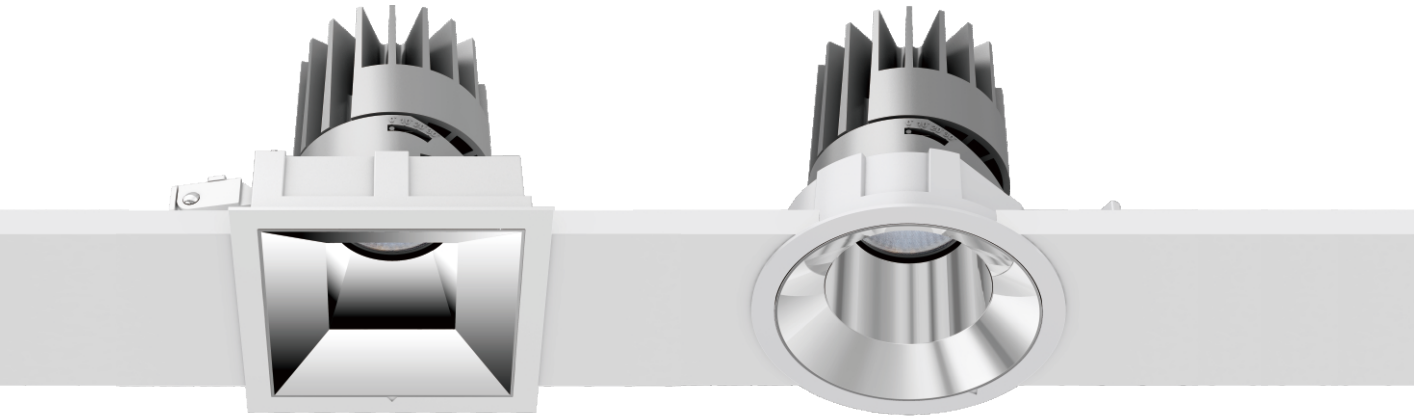


A versatile accent lighting solution.

Aesthetic design for architectural request.

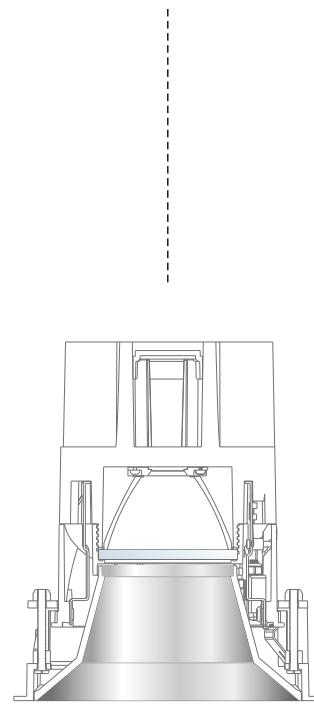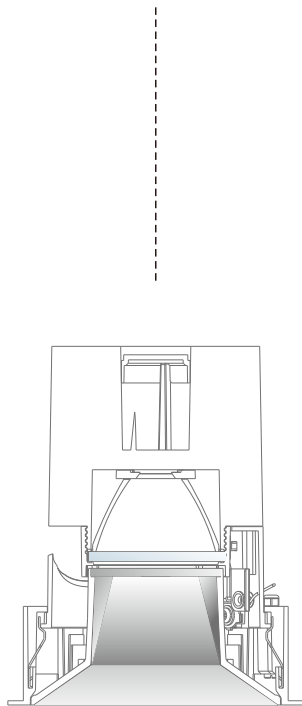

Aesthetic design trim available in round or square shape.
Three sizes with LED wattages 13W-38W.
Deep recessed secondary reflector generates visual comfort

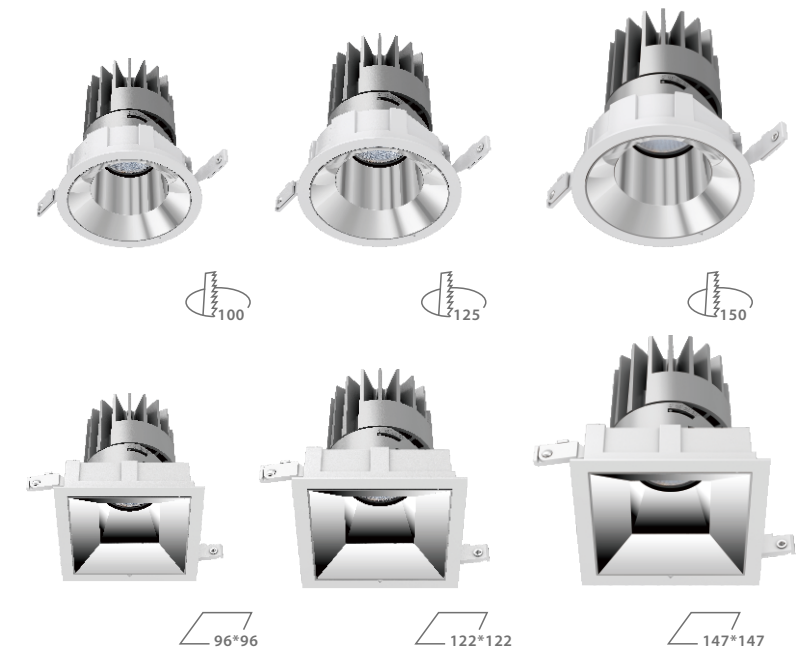


DRAMOMY-Fixed

LED Downlight-Fixed



Function


- Deep recessed secondary reflector enhances visual comfort.
- Thermally engineered heatsink creates highly efficient passive cooling system.
- Different colours of secondary reflector are available.
- Anti-glare accessory provides maximum eye comfort.
- Trimless installation downlight and accessory are available.
- 5 years guarantee.

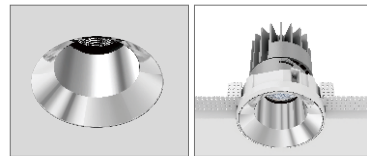

Trimless downlight version is optional.

Trim

Mounting Trim can be ordered separately



(125/150)
Trim (Standard)

(125/150)
Trimless (Option)

Secondary Reflector



Specular

Dark Specular

Chrome Black

White

Matt

Black

Gold

(125/150)
(Standard)

(125/150)
(Option)

(125/150)
(Option)

(125/150)
(Option)

(125/150)
(Option)

(125/150)
(Option)

(125/150)
(Option)

Accessory



color film- R(B/Y/G)


DRAMOMY-Fixed

LED Downlight-Fixed



Function

- Deep recessed secondary reflector enhances visual comfort.
- Thermally engineered heatsink creates highly efficient passive cooling system.
- Different colours of secondary reflector are available.
- Anti-glare accessory provides maximum eye comfort.
- Trimless installation downlight and accessory are available.
- 5 years guarantee.

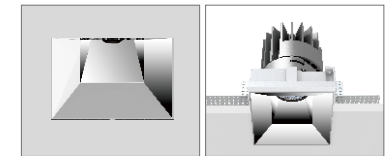

Trimless downlight version is optional.

Trim

Mounting Trim can be ordered separately



(125/150)
Trim (Standard)

(125/150)
Trimless (Option)

Secondary Reflector



Specular

Dark Specular

Chrome Black

White

Matt

Black

Gold

(125/150)
(Standard)

(125/150)
(Option)

(125/150)
(Option)

(125/150)
(Option)

(125/150)
(Option)

(125/150)
(Option)

(125/150)
(Option)

Accessory




color film- R(B/Y/G)

DRAMOMY-Trimless and Fixed


LED Downlight-Fixed

DIMON
TECHNOLOGY

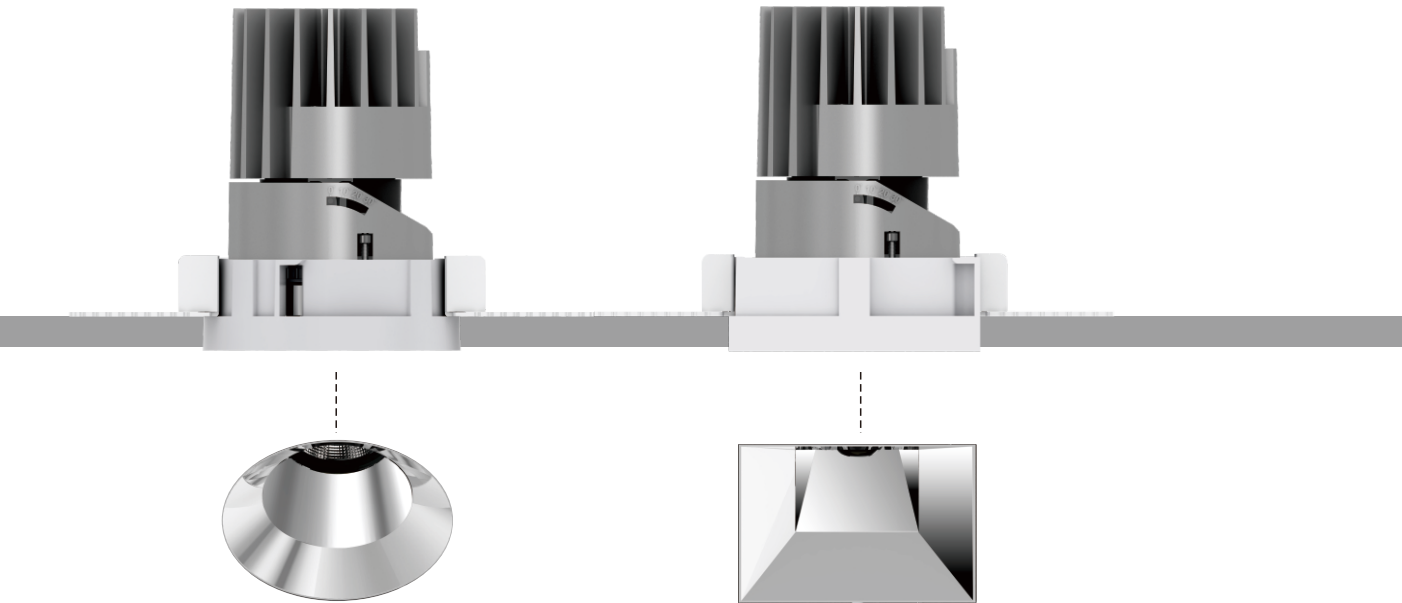

Trimless Version Available

Make your downlight invisible in the ceiling, fit for 12.5mm and 25mm thickness ceiling
Interchangeable downlight fixture and trimless accessory.
All technical datasheets are the same as adjustable series downlight (SRF and SSF, page 066-073).

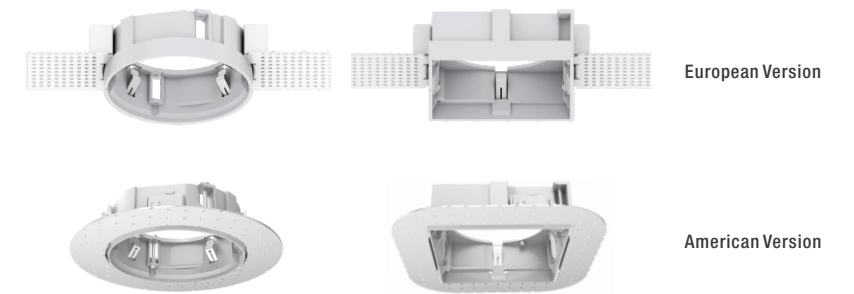




DRAMOMY-Wall Washer

WALL WASHER

Meticulous to detail
Interchangeable design
Best optics control
Guarantee maximal eye comfort



Trimless Version Available

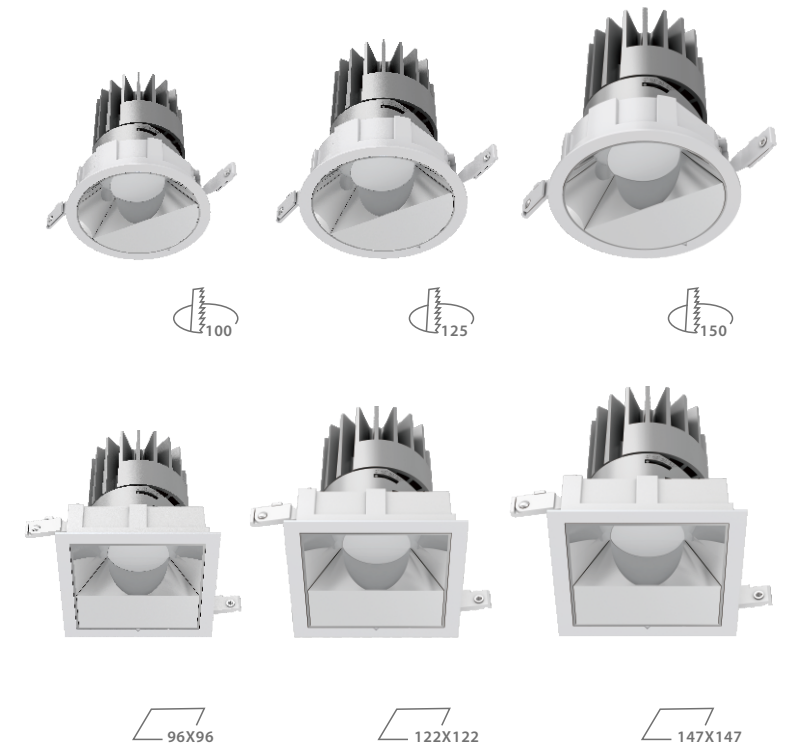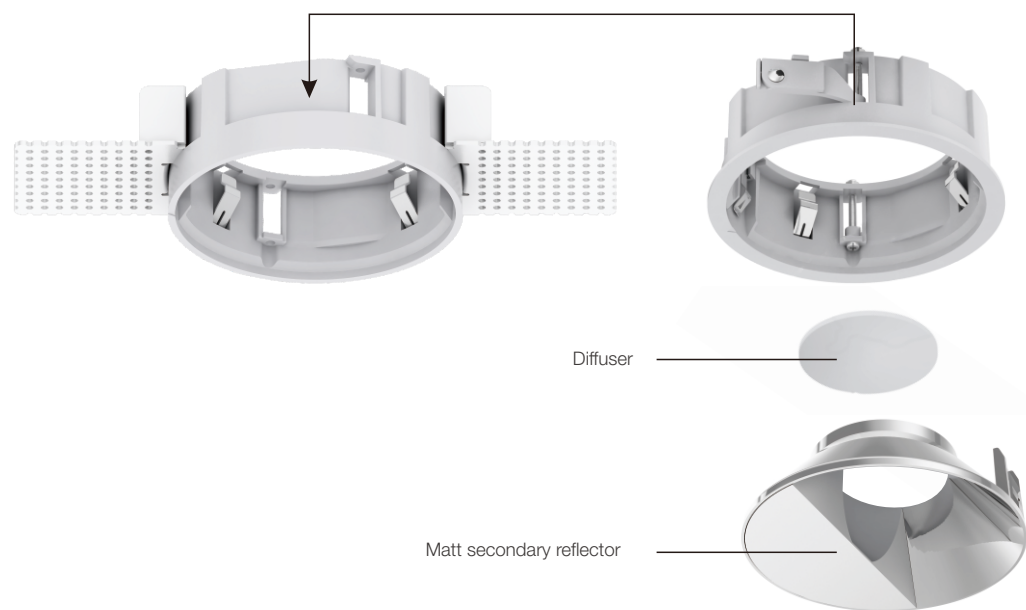

WALLWASHER-LED

Wall Washer design evenly illuminates walls.


DRAMOMY-Wall Washer

LED Downlight-Wall Washer




Function

- Asymmetric wall washer reflector evenly illuminates walls
- Thermally engineered heatsink creates highly efficient passive cooling system.
- Anti-glare accessory provides maximum eye comfort
- Trimless installation downlight and accessory are available.
- 5 years guarantee

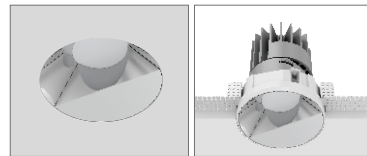


Trimless downlight version is optional.

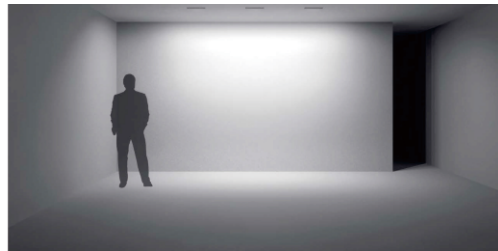

Trim

Mounting Trim can be ordered seperately



(125/150)
Trim (Standard)



(125/150)
Trimless (Option)

Secondary Reflector



Matt


(125/150)
(Option)

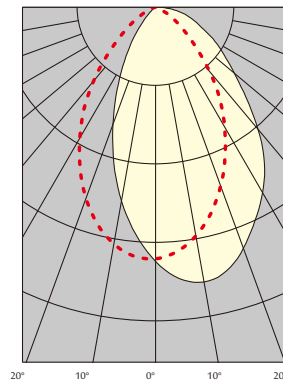

DRAMOMY-Wall Washer


LED Downlight-Wall Washer

DIMON
TECHNOLOGY

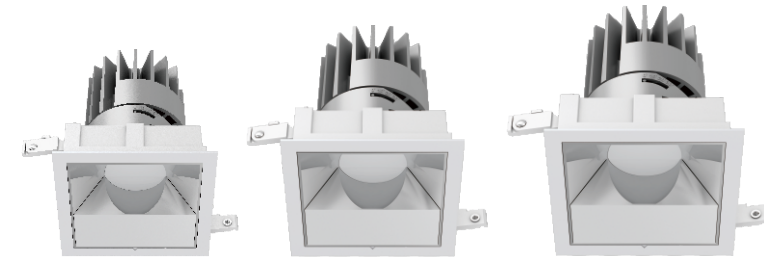


Function

- Asymmetric wall washer reflector evenly illuminates walls
- Thermally engineered heatsink creates highly efficient passive cooling system.
- Anti-glare accessory provides maximum eye comfort
- Trimless installation downlight and accessory.
- 5 years guarantee

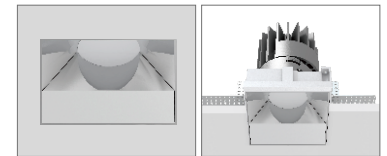


Trimless downlight version.

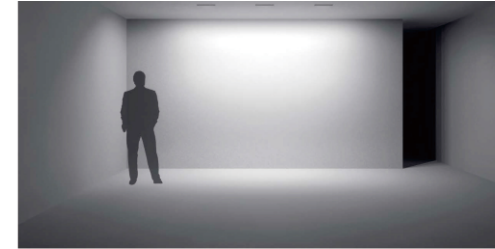



Mounting Trim

Trim

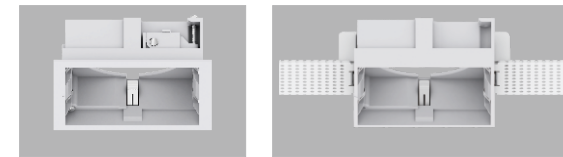

(125/150)
Trim

(125/150)
Trimless

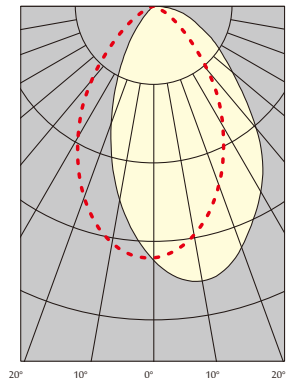

Secondary Reflector




Matt

(125/150)

DRAMOMY-Wall Washer

LED Downlight-Wall Washer

DIMON
TECHNOLOGY

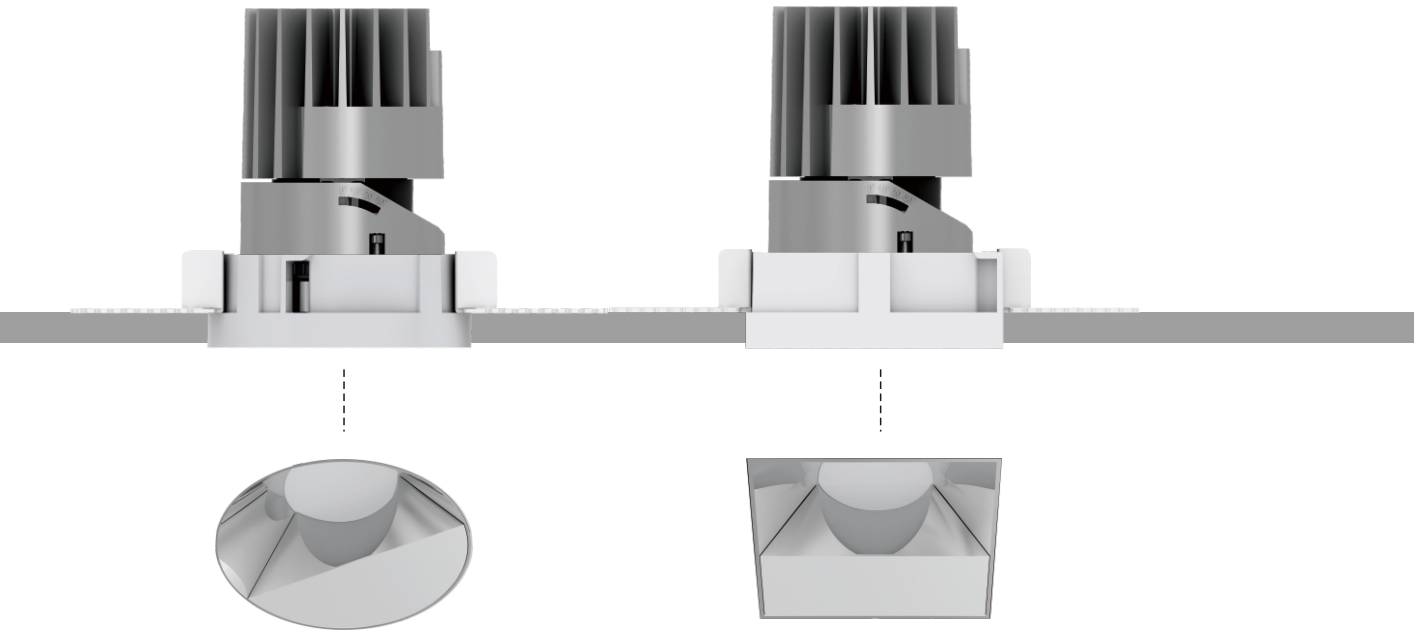

Trimless Version Available

Make your downlight invisible in the ceiling, fit for 12.5mm and 25mm thickness ceiling
Interchangeable downlight fixture and trimless accessory.
All technical datasheets are the same as adjustable series downlight (TRW and TSW, page 078-085).

