

DYNIS-G2

30W Max



IP20







- Housing: die-cast aluminium with polyester powder-coated
- Anti UV Polycarbonate (PC) diffuser
- Integrated-Type 0-10V, DALI, LED constant current control gear.

Technical Data

Luminaire Type- 安裝方式 Tipo de luminaria	Surface Mounted Type 明裝式燈具 Tipo montado
Dimension-尺寸-Dimensión	• Dia 120xH: 105mm • Dia 173 x H: 135 mm • Dia 200 x H: 145mm
Power Consumption Max-燈具功率 Consumo de energía Max	• 10W @ Dia 120 mm • 14W @ Dia 120 mm • 15W @ Dia 173 mm • 18W @ Dia 173mm • 20W @ Dia 173 mm • 22W @ Dia 173 mm • 25W @ Dia 200 mm • 30W @ Dia 200 mm
Input Voltage-輸入電壓-Voltaje de entrada	AC220-240V 50/60HZ
LED Driver Type LED驅動款式 Tipo de controlador LED	Integrated-type LED Driver--Refer to LED driver specification 請參閱LED驅動器規格 Consulte la especificación de controlador de LED 1. ON/OFF Switch AC220-240V 50/60HZ 2. 0-10V Dimming Driver AC220-240V 50/60HZ 3. Dali Dimming Driver AC220-240V 50/60HZ 4. Remote Emergency Backup >2 hours or >3 hours @ < 12 charger hours應急電池/ Copia de seguridad de emergencia
LED Driver Features驅動特性 Funciones del controlador de LED	• POWER FACTOR : PF>0.90 @ Full Load • TOTAL HARMONIC DISTORTION: THD< 20%
Control Protocol-控制協議 Protocolo de Control	1-10V / Dali
Beam Angle光束角ángulo de haz	90°
Light Source Brand-光源品牌-Fuente de luz de marca	SMD
"Lumen Maintenance LM-80 Reported by TM-21"	L70 > 54,000 hrs
LED Life-LED壽命-La vida del LED	>60,000 hours
Color Temperature -色溫 Temperatura del color	2700K / 3000K / 4000K / 5000K / 6500K
Color Rendering Index-顯色指數 Índice de reproducción cromática	>80
MacAdam Ellipses Binning 麥克亞當橢圓分級 Mac Adam binning ellipse	Standard Deviation Colour Matching < 3 SDCM標準偏差配色< 3 SDCM Coincidencia de color estándar Desviación < 3 SDCM
Luminaire Efficacy燈具效率 La eficacia de la luminaria	• 100Lm/w(2700K), 100 Lm/w((3000K), 110 Lm/w((4000K), • 120 Lm/w((5000K), 120 Lm/w((6500K),
LED Source Luminous EfficacyLED光源光效 Fuente luminosa LED Eficacia	• 130Lm/w(2700K), 130 Lm/w((3000K), 140 Lm/w((4000K), • 150 Lm/w((5000K), 150 Lm/w((6500K),
Housing materials-外殼材料 Materiales de la carcasa	Die-cast aluminum and Polycarbonate diffuser 壓鑄鋁和PC 擴散器 Aluminio fundido a presión y difusor de policarbonato
Housing Color外殼顏色 color de la carcasa	Polyester powder-coated : White RAL9003 or Matt Black RAL9005 聚酯粉末塗層：白色 RAL9003 或啞光黑色 RAL9005 Revestimiento de polvo de poliéster: blanco RAL9003 o negro mate RAL9005
Ingress Protection-防護等級 Protección de ingreso	IP20
Operating Humidity -工作濕度 Humedad de funcionamiento	0~90%, non-condensing-不結霜 sin condensación
Operating Temperature Range / 工作溫度範圍 Rango de temperatura de funcion amiento	-30 °C / +50 °C
Comply Testing Standard 符合測試標準 Cumplir el estándar de prueba	ED Luminaires: IEC/EN 60598-1 ; IEC/EN 60598-2-1 ; IEC/ EN62493 ; IEC/EN 62301 ; IEC TR 62778 & IEC 62471 LED Driver: EN 55015 / IEC 61000-3-2 / IEC 61347-1 / IEC 61347-2-13 / IEC 61547
Certification-認證-Certificación	     

BEAM ANGLE

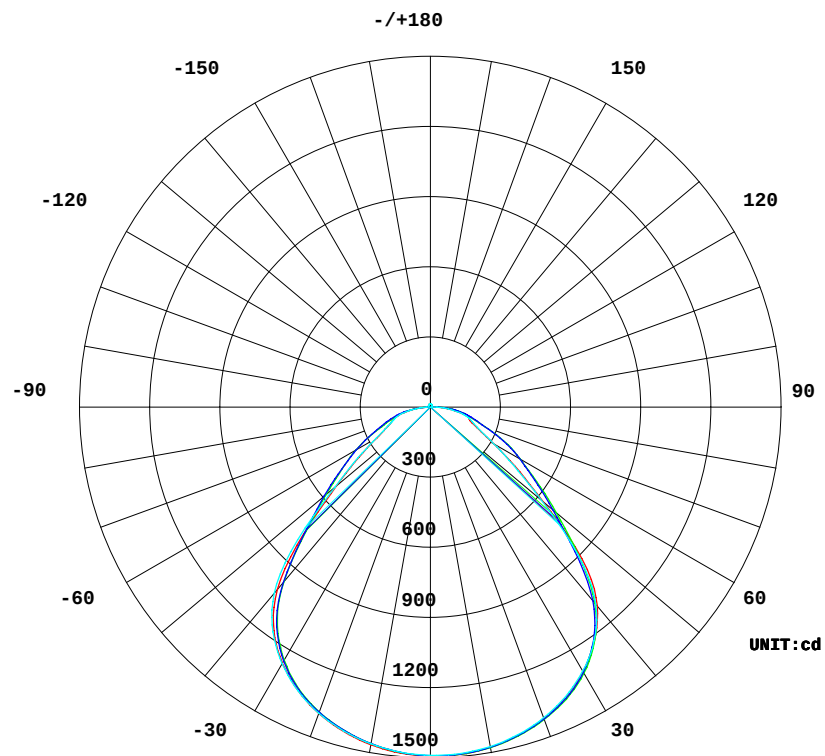

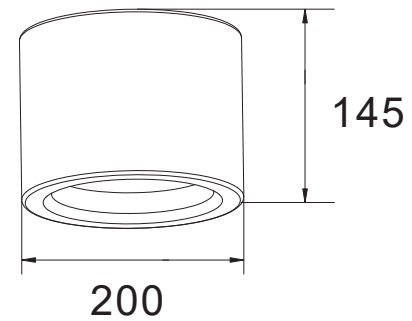

Unit: mm