



LUCI

D350 ~600mm 38W Max

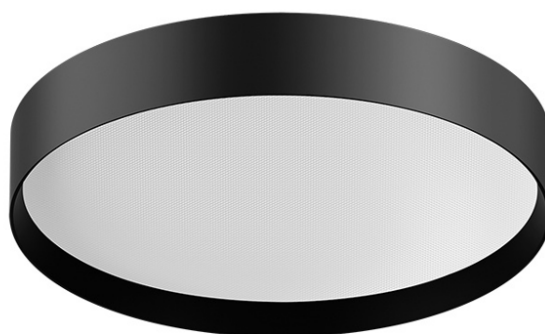

UK
DESIGN



Micro-prismatic Cover
Anti-glare UGR19



- Housing: die-cast aluminium with polyester powder-coated
- Anti UV Polycarbonate (PC) diffuser
- Integrated-Type 0-10V, DALI, LED constant current control gear.
- Microprismatic Cover Anti-glare UGR19 to distribute comfortable light

Technical Data

Luminaire Type- 安裝方式 Tipo de luminaria	Surface Mounted Type , Screw Pole Pendant type or Wire Pendant Mounted Type 明裝式燈具, 絲杆吊裝或 鋼絲吊裝式燈具			
Dimension-尺寸-Dimensión	Dia 350mm Dia 450mm Dia 600mm			
Power Consumption Max-燈具功率 Consumo de energía Max	Down Light : Dia 350mm : 15W Down Light : Dia 450mm: 22W Down Light : Dia 600mm : 30W	20W 26W 38W	Optional Up Light (9W) Optional Up Light (9W or 15W) Optional Up Light (9W or 15W)	
Input Voltage-輸入電壓-Voltaje de entrada	AC220-240V 50/60HZ			
LED Driver Type LED驅動款式 Tipo de controlador LED	Integrated-type LED Driver--Refer to LED driver specification 請參閱LED驅動器規格 Consulte la especificación de controlador de LED 1. ON/OFF Switch AC220-240V 50/60HZ 2. 0-10V Dimming Driver AC100-240V 50/60HZ 3. Dali Dimming Driver AC100-240V 50/60HZ 4. Remote Emergency Backup >2 hours or >3 hours @ < 12 charger hours應急電池/Copia de seguridad de emergencia			
LED Driver Features驅動特性 Funciones del controlador de LED	POWER FACTOR : PF>0.90 @ Full Load TOTAL HARMONIC DISTORTION: THD< 20%			
Control Protocol-控制協議 Protocolo de Control	1-10V / Dali			
Beam Angle光束角ángulo de haz	Down Light : 90°	Up Light : 120°		
Light Source Brand-光源品牌-Fuente de luz de marca	SMD			
"Lumen Maintenance LM-80 Reported by TM-21"	L70(10k) > 60,000 hrs			
LED Life-LED壽命-La vida del LED	>60,000 hours			
Color Temperature -色溫 Temperatura del color	2700K / 3000K / 4000K / 5000K / 6500K			
Color Rendering Index-顯色指數 Índice de reproducción cromática	>90			
MacAdam Ellipses Binning 麥克亞當橢圓分級 Mac Adam binning ellipse	Standard Deviation Colour Matching < 3 SDCM標準偏差配色< 3 SDCM Coincidencia de color estándar Desviación < 3 SDCM			
Luminaire Efficacy燈具效率 La eficacia de la luminaria	100Lm/w(2700K), 120 Lm/w((5000K),	100 Lm/w((3000K), 120 Lm/w((6500K),	110 Lm/w((4000K),	
LED Source Luminous EfficacyLED光源光效 Fuente luminosa LED Eficacia	130Lm/w(2700K), 150 Lm/w((5000K),	130 Lm/w((3000K), 150 Lm/w((6500K),	140 Lm/w((4000K),	
Housing materials-外殼材料 Materiales de la carcasa	Die-cast aluminum and Polycarbonate Microprismatic Cover diffuser 壓鑄鋁和壓鑄鋁和PC微棱鏡蓋擴散器 Aluminio fundido a presión y difusor de policarbonato			
Housing Color外殼顏色 color de la carcasa	Polyester powder-coated : White RAL9003 or Matt Black RAL9005 聚酯粉末塗層: 白色 RAL9003 或啞光黑色 RAL9005 Revestimiento de polvo de poliéster: blanco RAL9003 o negro mate RAL9005			
Ingress Protection-防護等級 Protección de ingreso	IP20			
Operating Humidity -工作濕度 Humedad de funcionamiento	0~90%, non-condensing-不結霜 sin condensación			
Operating Temperature Range / 工作溫度範圍 Rango de temperatura de funcion amiento	-30 °C / +50 °C			
Comply Testing Standard 符合測試標準 Cumplir el estándar de prueba	ED Luminaires: IEC/EN 60598-1 ; IEC/EN 60598-2-1 ; IEC/ EN62493 ; IEC/EN 62301 ; IEC TR 62778 & IEC 62471 LED Driver: EN 55015 / IEC 61000-3-2 / IEC 61347-1 / IEC 61347-2-13 / IEC 61547			
Certification-認證-Certificación				

Project	Fixture#	Date
		Firm

Ordering Information


Choose the option that suits your need and write its corresponding code on the appropriate line to form the product code.

Example product code: [LUCI -38W](#)

LUCI - -

[Power Consumption](#)



Power Consumption	
Code	Description
15W	Down Light Dia 350mm 15W
20W	Down Light Dia 350mm 20W
22W	Down Light Dia 450mm 22W
26W	Down Light Dia 450mm 26W
30W	Down Light Dia 600mm 30W
38W	Down Light Dia 600mm 38W

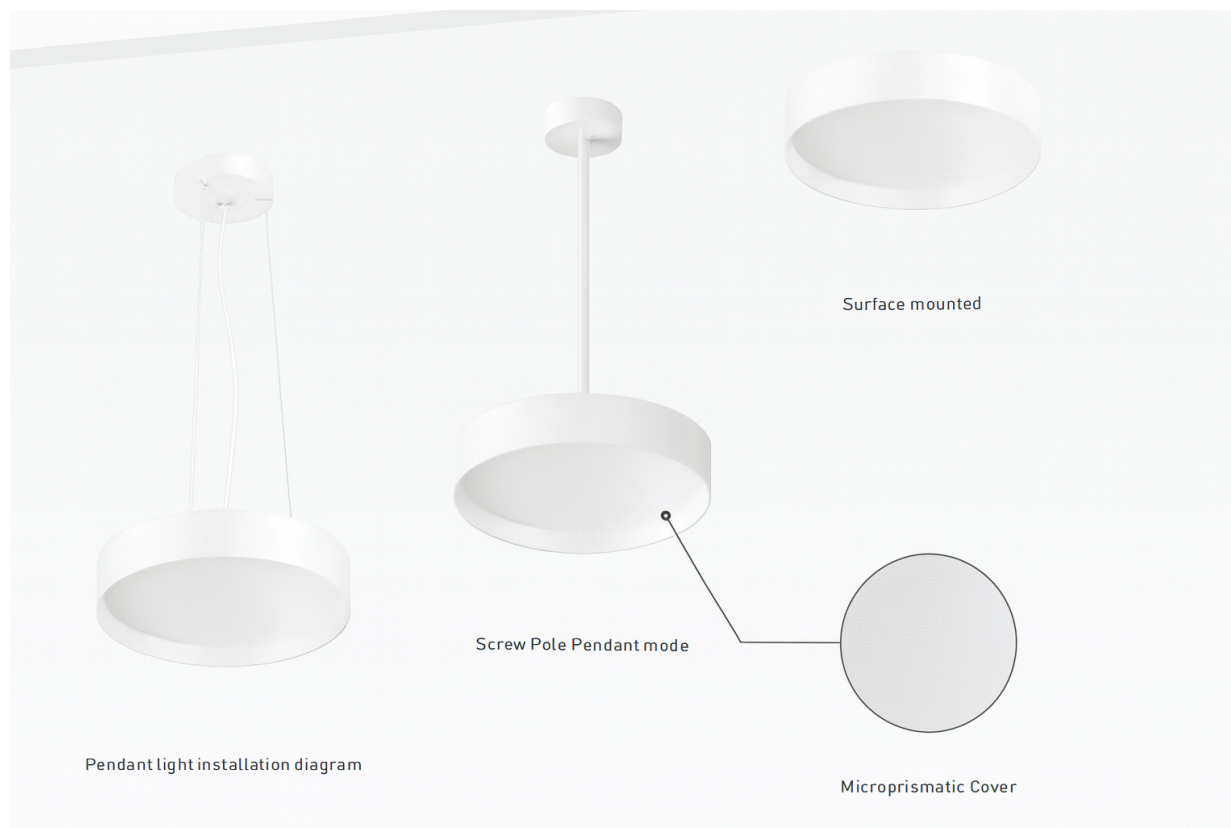

BEAM ANGLE




Optional Up Light Effect

Light diagram


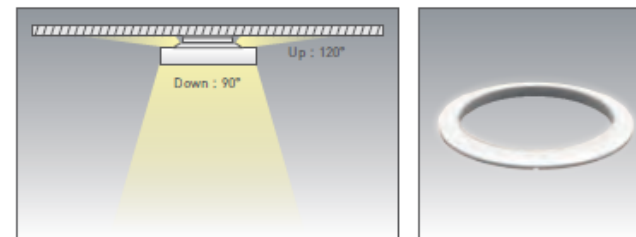
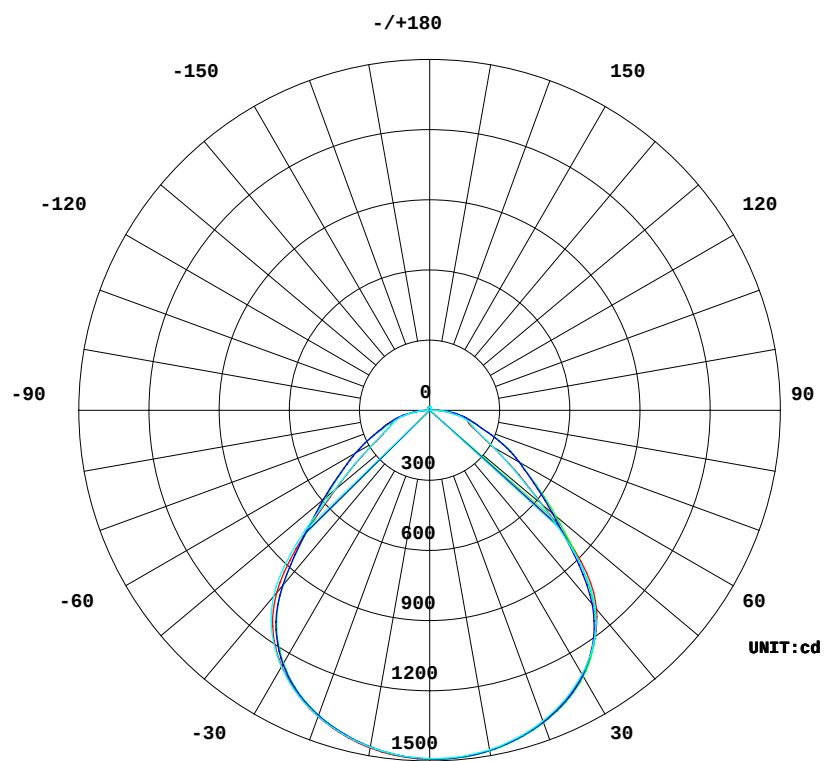


Technical Drawing



Surface Mounted Type

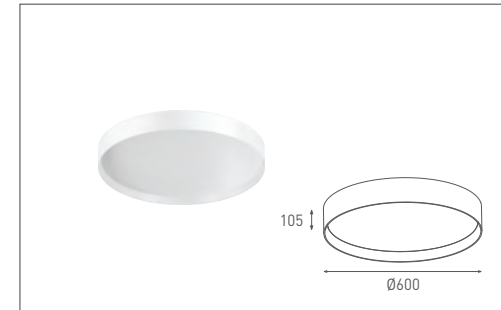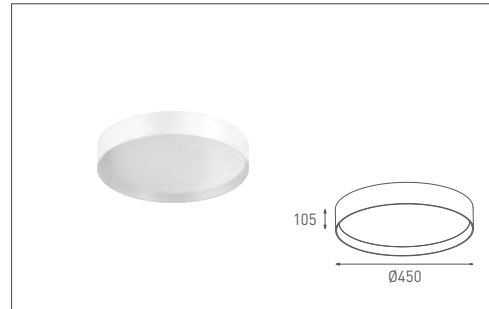

Wire Pendant Mounted Type

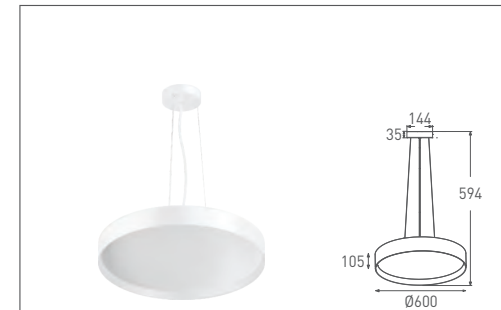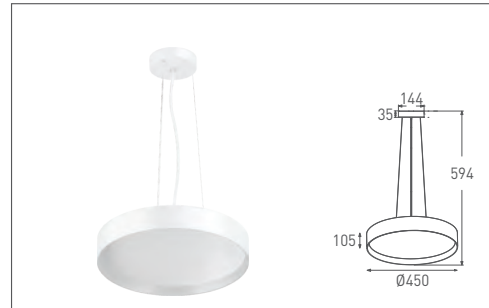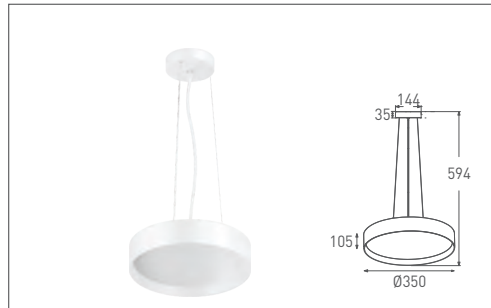

Screw Pole Pendant type

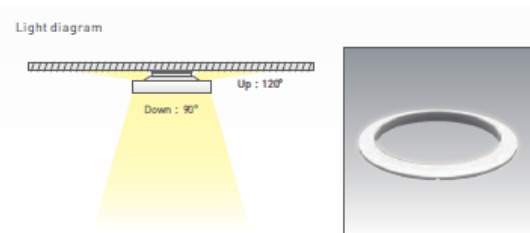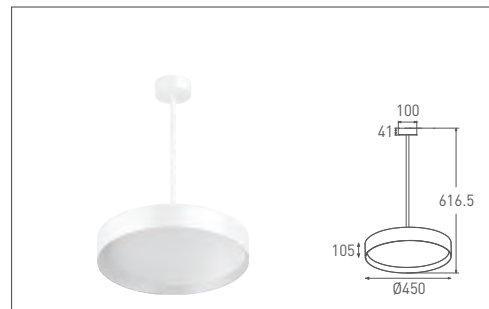

Unit: mm