


BAWATY

Slim BAWATY Waterproof Batten



- Well design for resistant Dust and Moisture resistance and waterproof.
- Anti-UV Clear polycarbonate housing and polycarbonate linear prisms diffuser.
- Silicone-sponge Gasket , stainless steel toggles and stainless-steel Quick fix bracket. Ingress-protected to a level of IP66.
- Comply with Hot Wire Testing: 850°C and Electrical protection class I.
- Impact protection IK10

Technical Data

Installation / 安裝方式 / Instalación	Pendant mounted / Surface mounted / Wall Mounted 吊裝 / 吸頂式 / 壁掛式 Montaje colgante / Montaje en superficie / Montaje en pared
Dimension / 尺寸 / Dimensión	Single Tube Batten LED T5 or LED T8 L:655 x W:90 x H:92mm L:1265 x W:90 x H:92mm L:1565 x W:90 x H:92mm Twin Tube Batten LED T5 or LED T8 L:655 x W:130 x H:92mm L:1265 x W:130 x H:92mm L:1565 x W:130 x H:92mm
Input Voltage / 輸入電壓 / Voltaje de entrada	AC220 - 240V 50/60HZ
Power Consumption / 燈具功率 Consumo de energía	Single Tube Batten LED T5 or LED T8 2 feet : 1 x 6W 1 x 7W 1 x 8W 1 x 9W 1 x 10W 4 feet : 1 x 12W 1 x 13W 1 x 14W 1 x 15W 4 feet : 1 x 16W 1 x 18W 1 x 20W 5 feet : 1 x 20W 1 x 22W 1 x 24W 1 x 25W 1 x 30W Twin Tube Batten LED T5 or LED T8 2 feet : 2 x 6W 2 x 7W 2 x 8W 2 x 9W 2 x 10W 4 feet : 2 x 12W 2 x 13W 2 x 14W 2 x 15W 4 feet : 2 x 16W 2 x 18W 2 x 20W 5 feet : 2 x 20W 2 x 22W 2 x 24W 2 x 25W 2 x 30W
LED Driver Type / LED驅動款式 Tipo de controlador LED	Integrated Type or Remoted LED Driver Consulte la especificación de controlador de LED 1. On / Off Switch AC220-240V 50/60Hz Cable wire for AC LED Tube 2.0/1-10V Dimming Driver AC220-240V 50/60Hz for DC LED Tube 3. DALI Dimming Driver AC220-240V 50/60Hz for DC LED Tube 4. ZIGBEE Wireless Control (Remoted Driver) AC220-240V 50/60Hz for DC LED Tube 5. Emergency Backup >2 hours or >3 hours @ < 12 charger hours 應急電池 / Cópia de seguridad de emergencia 6. Microwave Sensor On / Off
Control Protocol / 控制協議 Protocolo de Control	0/1-10V / DALI / ZIGBEE Wireless Control
Beam Angle / 光束角 / ángulo de haz	Refer to LED T5 / T8 tube data sheet
Photobiological safety (IEC 62471) 光生物安全檢驗(IEC 62471) Seguridad fotobiológica (IEC 62471)	Low Risk Group 1 (RG1) Refer to LED T5 / T8 Specification 低風險組1 (RG1) 參閱LED T5 / T8規格 Grupo de bajo riesgo 1 (RG1) Consulte la especificación LED T5 / T8
Housing materials / 外殼材料 Materiales de la carcasa	Anti-UV Clear polycarbonate housing and polycarbonate linear prisms diffuser. Silicone Gasket, Stainless Steel Toggles and Stainless-Steel Quick fix bracket. 防紫外線透明聚碳酸酯外殼和聚碳酸酯線條棱鏡擴散器。 矽膠墊片，不銹鋼扣和不銹鋼快速固定夾。 Carcasa de policarbonato transparente anti-UV y difusor de prismas lineales de policarbonato. Junta de silicona, palancas de acero inoxidable y soporte de fijación rápida de acero inoxidable.
Housing Color / 外殼顏色 color de la carcasa	Light Grey body and Clear diffuser 淺灰色主體和透明擴散器 Cuerpo gris claro y difusor transparente
Operating Temperature Range / 工作溫度範圍 Rango de temperatura de funcionamiento	-20 °C / + 40 °C
Operating Humidity / 工作濕度 Humedad de funcionamiento	0~90%, non-condensing / 不結霜 sin condensación
Ingress Protection / 防護等級 / Protección de ingreso	IP66
Impact Protection / 衝擊防護 Protección contra impactos	IK10
Comply Testing Standard 符合測試標準 Cumplir el estándar de prueba	LED Luminaires: IEC/ EN 60598-1 / EN 60598-2-1 / EN 62031 / EN 62493 / IEC/EN 62471 / IEC 60598-2-22 / IEC 62031 / EN 55015 / EN 61000-3-2 / EN 61000-3-3 / EN 61547 / IEC 62262 / IEC 60529 / IEC TR62778 Luminaires Performance : IEC 62722-1 / IEC 62722-2-1 FSD regulation PPA 104A (4th Rev). RoHS
Certification / 認證 / Certificación	     

Project	Fixture#	Date
		Firm



Ordering Information

Choose the option that suits your need and write its corresponding code on the appropriate line to form the product code.

Example product code: [BAWATY-32W](#)


BAWATY - -

 POWER


POWER		POWER	
Code	Description	Code	Description
6W	1 x 2 feet 6W LED T5 / T8	12W	2 x 2 feet 6W LED T5 / T8
7W	1 x 2 feet 7W LED T5 / T8	14W	2 x 2 feet 7W LED T5 / T8
8W	1 x 2 feet 8W LED T5 / T8	16W	2 x 2 feet 8W LED T5 / T8
9W	1 x 2 feet 9W LED T5 / T8	18W	2 x 2 feet 9W LED T5 / T8
10W	1 x 2 feet 10W LED T5 / T8	20W	2 x 2 feet 10W LED T5 / T8
12W	1 x 4 feet 12W LED T5 / T8	24W	2 x 4 feet 12W LED T5 / T8
13W	1 x 4 feet 13W LED T5 / T8	26W	2 x 4 feet 13W LED T5 / T8
14W	1 x 4 feet 14W LED T5 / T8	28W	2 x 4 feet 14W LED T5 / T8
15W	1 x 4 feet 15W LED T5 / T8	30W	2 x 4 feet 15W LED T5 / T8
16W	1 x 4 feet 16W LED T5 / T8	32W	2 x 4 feet 16W LED T5 / T8
18W	1 x 4 feet 18W LED T5 / T8	36W	2 x 4 feet 18W LED T5 / T8
20W	1 x 4 / 5 feet 20W LED T5 / T8	40W	2 x 4 / 5 feet 20W LED T5 / T8
22W	1 x 5 feet 22W LED T5 / T8	44W	2 x 5 feet 22W LED T5 / T8
24W	1 x 5 feet 24W LED T5 / T8	48W	2 x 5 feet 24W LED T5 / T8
25W	1 x 5 feet 25W LED T5 / T8	50W	2 x 5 feet 25W LED T5 / T8
30W	1 x 5 feet 30W LED T5 / T8	60W	2 x 5 feet 30W LED T5 / T8

Beam Angle


1x9W

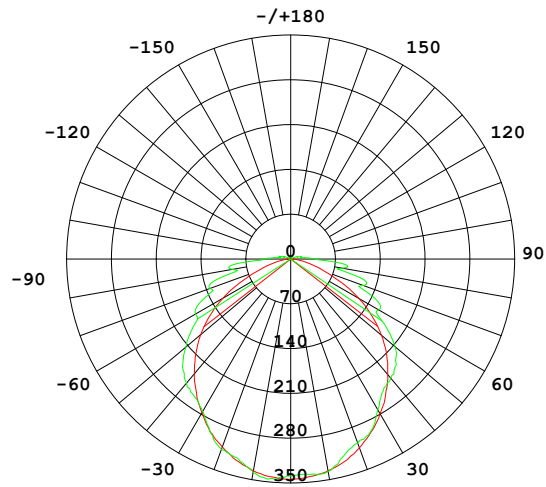


1x18W

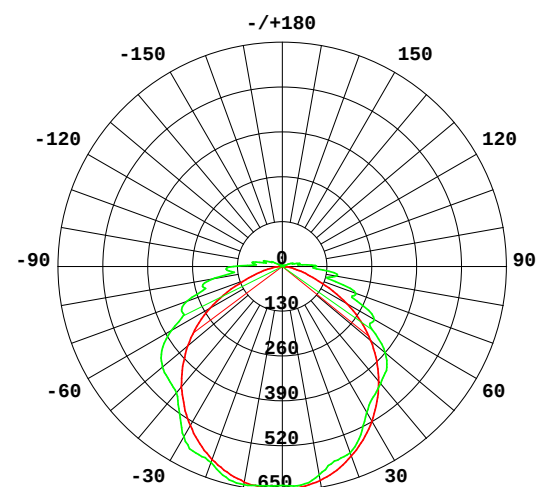

2x9W


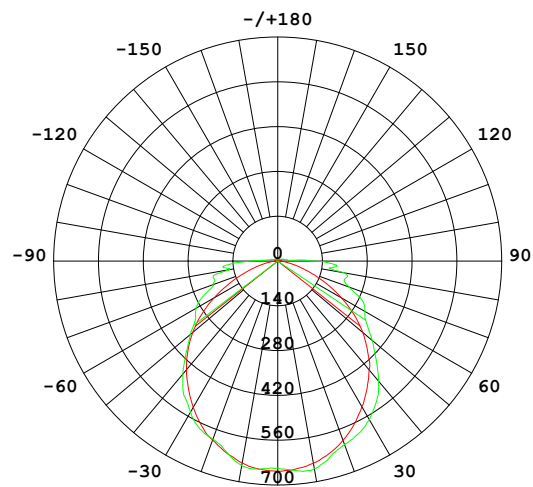


2x18W


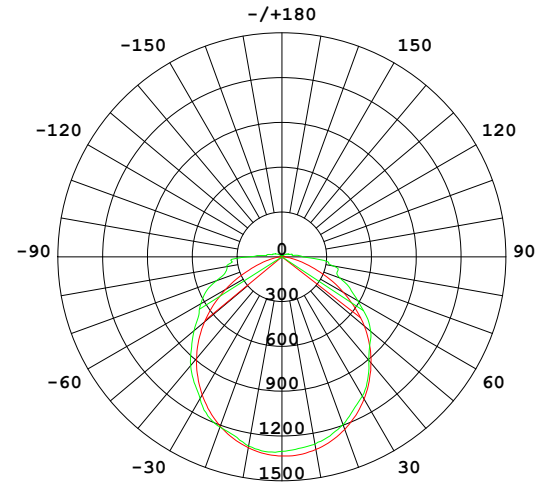


Technical Drawing

Single Type:

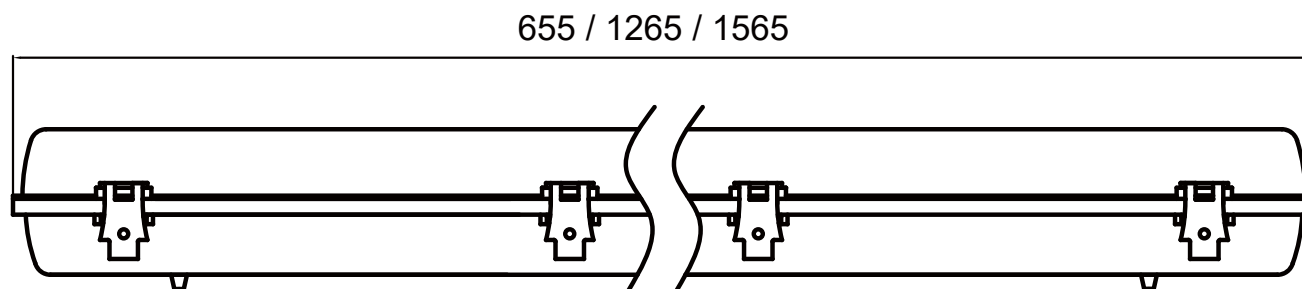


Twin Type:

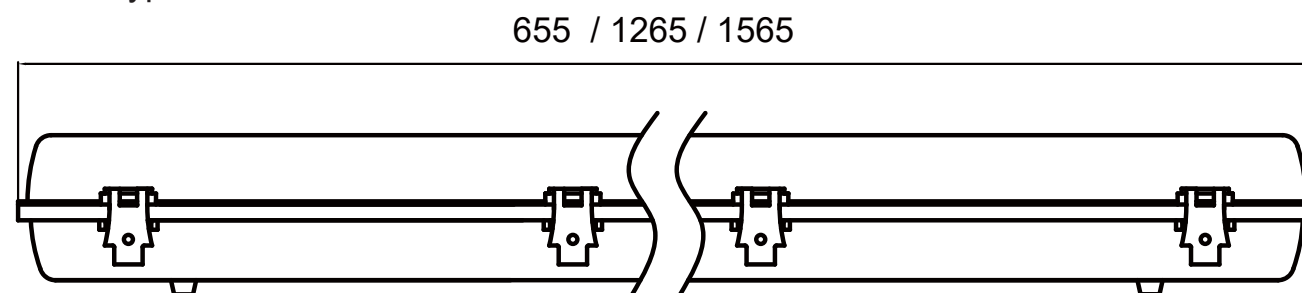


Unit: mm

Fixture Type: LED Waterproof Single Batten

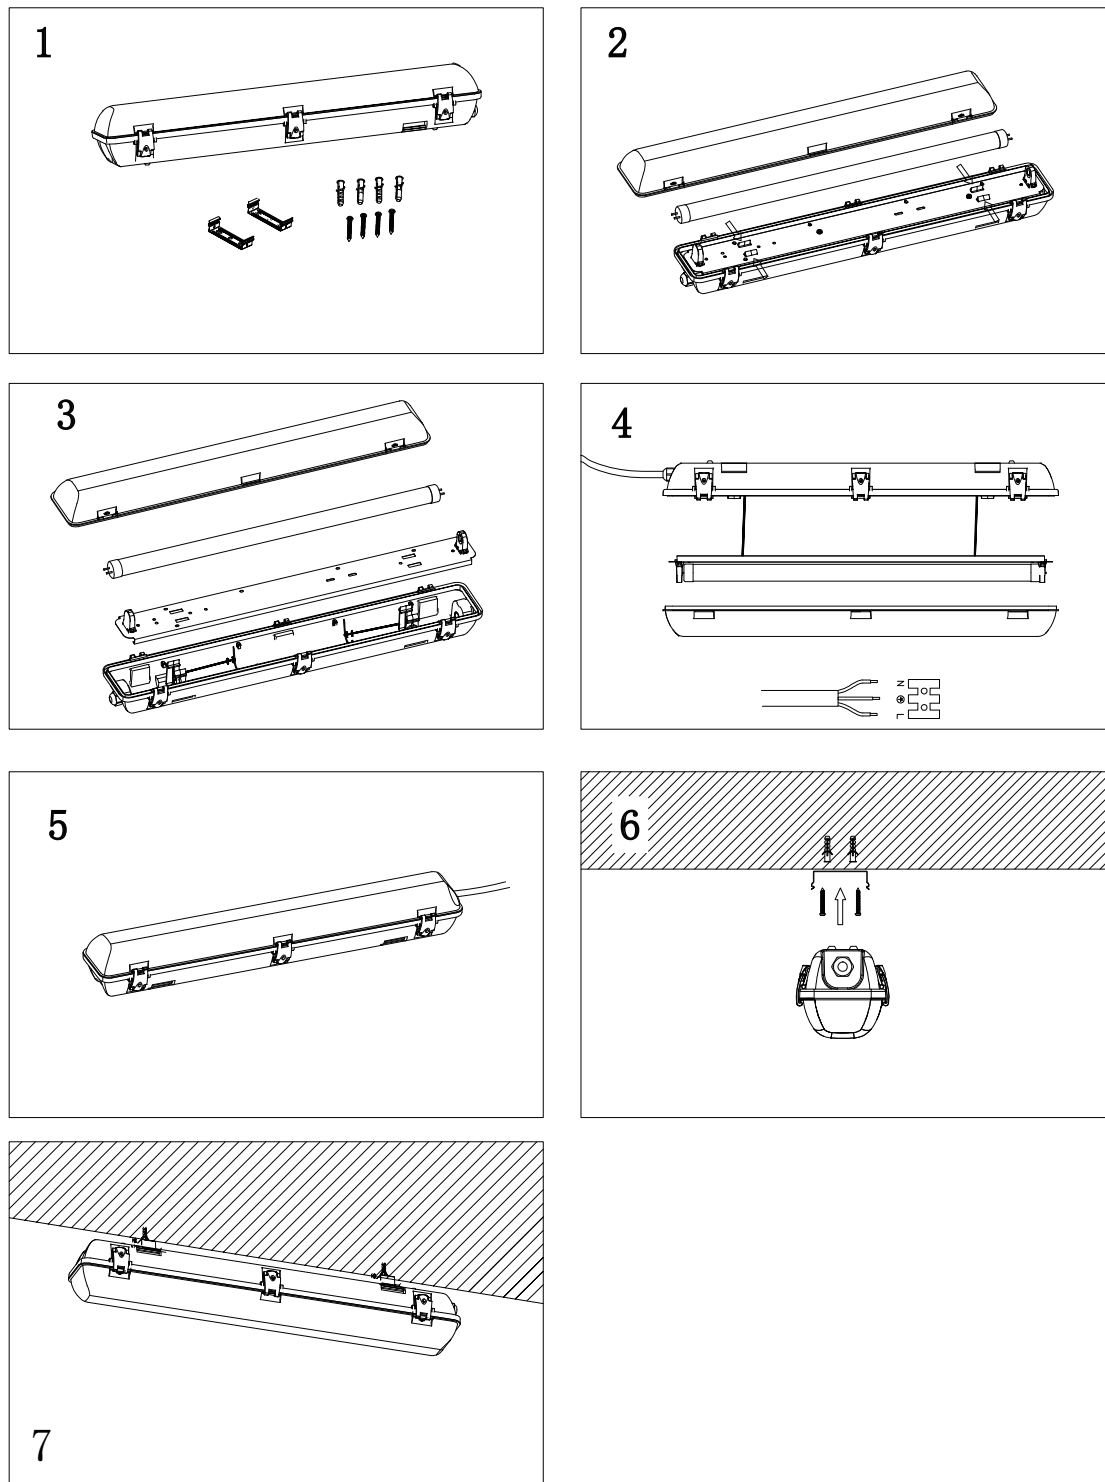

*For more details, refer to data sheet.

Fixture Type: LED Waterproof Twin Batten

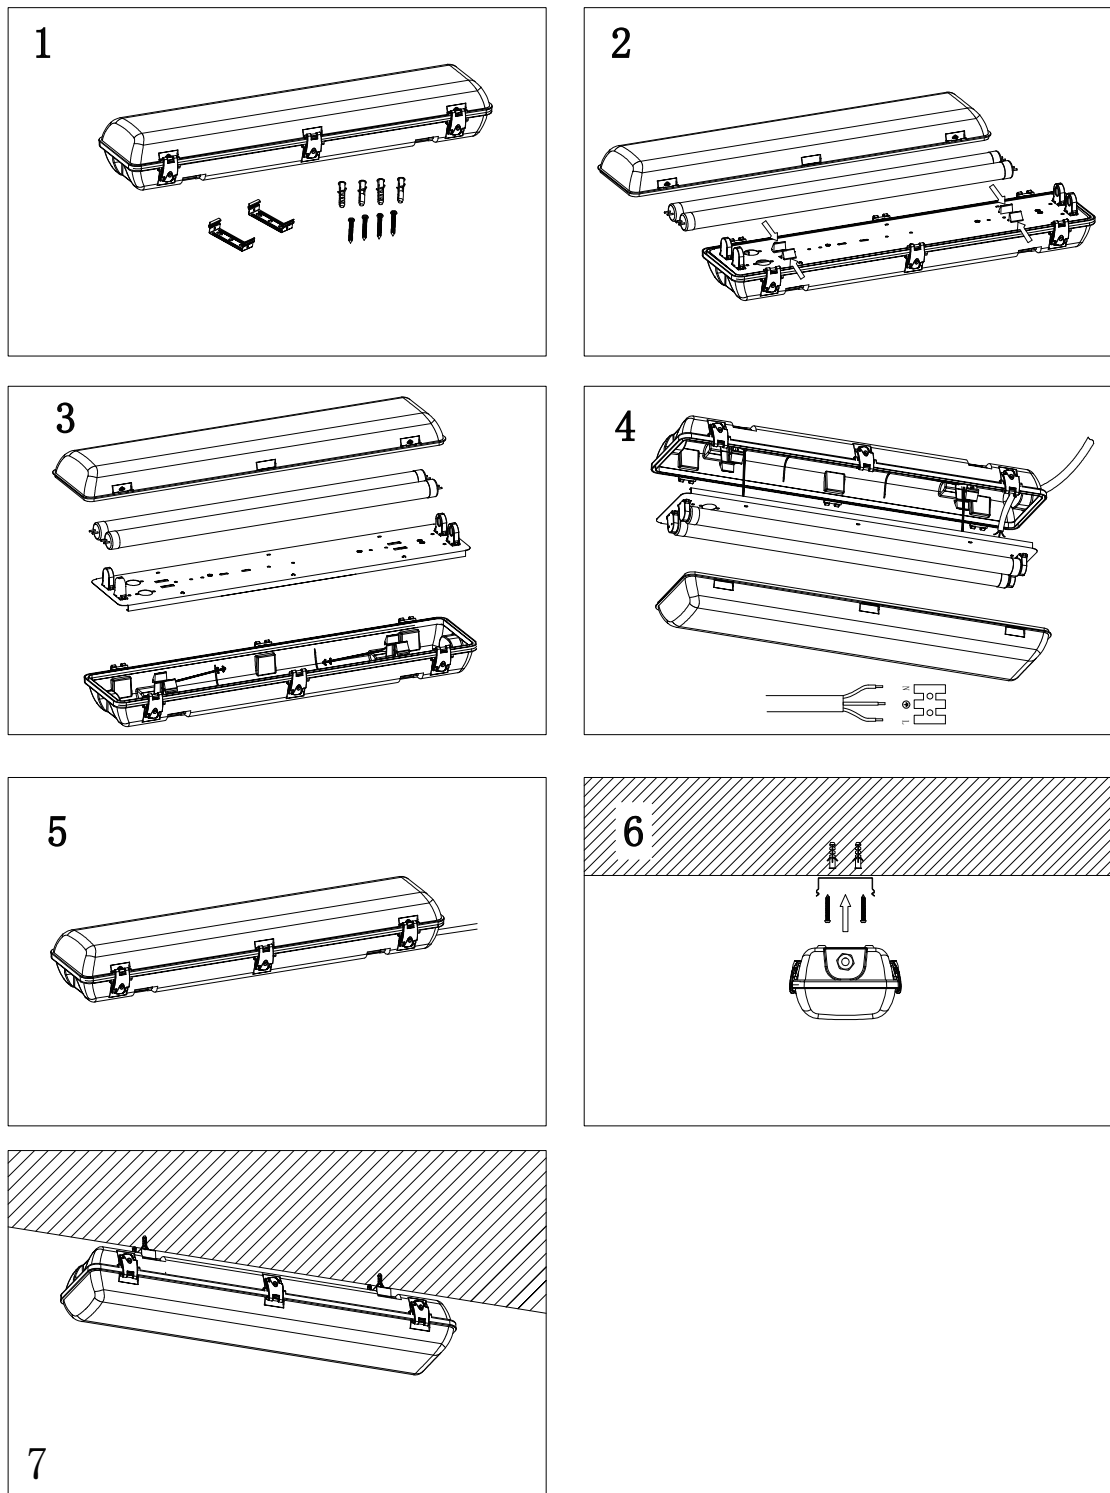

*For more details, refer to data sheet.