

WEER-MINI











20mm Mini 1W LED Deck Light



LED in-ground luminaires with small dimensions for flush-mounting installation.
The luminaire housing made of die-cast aluminium and AISI 316 stainless steel Cover with tempered glass.

Technical Data

Luminaire Type 安裝方式 Tipo de luminaria	Recessed In-Ground Type 內嵌式地埋燈 Empotrada en el suelo del Tipo		
Power Consumption Max 燈具功率 Consumo de energía Max	1W		
Input Voltage 輸入電壓 Voltaje de entrada	• DC24V		
LED Driver Type LED驅動款式 Tipo de controlador LED	Remoted-type LED Driver--Refer to LED driver specification 請參閱LED驅動器規格 Consulte la especificación de controlador de LED 1. ON/OFF Switch AC100-240V 50/60HZ 2. ELV Dimming Driver (5-100%) AC 100-120V 50/60Hz or AC 200-240V 50/60HZ 3. 0-10V Dimming Driver AC100-240V 50/60HZ 4. Dali Dimming Driver AC100-240V 50/60HZ 5. DMX Driver AC100-240V 50/60HZ 6. RDM Driver AC100-240V 50/60HZ		
Control Protocol 控制協議 Protocolo de Control	0-10V / Dali / DMX 512 / RDM / ZIGBEE Wireless Control		
Beam Angle 光束角 ángulo de haz	120°		
Light Source Brand/光源品牌 Fuente de luz de marca	CREE		
"Lumen Maintenance LM-80 Reported by TM-21"	L70(10k) > 60,000 hrs		
LED Life/LED壽命 La vida del LED	>60,000 hours		
Color Temperature / 色溫 / Temperatura del color	2700K / 3000K / 4000K / 5000K / 6500K		
Color Rendering Index/顯色指數 Índice de reproducción cromática	>80 >90		
MacAdam Ellipses Binning 麥克亞當橢圓分級 Mac Adam binning elipse	Standard Deviation Colour Matching < 3 SDCM 標準偏差配色 < 3 SDCM Coincidencia de color estándar Desviación < 3 SDCM		
Luminaire Efficacy 燈具效率 La eficacia de la luminaria	50 Lm/w(2700K), 60 Lm/w(5000K),	55 Lm/w(3000K), 60 Lm/w(6500K),	60 Lm/w(4000K), 60 Lm/w(6500K),
LED Source Luminous Efficacy LED光源光效 Fuente luminosa LED Eficacia	120 Lm/w(2700K), 140Lm/w(5000K),	130 Lm/w(3000K), 140 Lm/w(6500K),	140 Lm/w(4000K), 140 Lm/w(6500K),
Housing materials/外殼材料 Materiales de la carcasa	Die cast aluminium ,Milky tempered glass with #316 Stainless Steel Cover 壓鑄鋁, 乳白鋼化玻璃和#316不銹鋼面蓋 Aluminio fundido, vidrio templado de con # 316 de la cubierta de acero inoxidable		
Housing Color/ 外殼顏色 Color de la carcasa	#316 Stainless Steel Cover #316不銹鋼面蓋 # 316 de la cubierta de acero inoxidable #316 Stainless Steel Chrome Black #316不銹鋼鉻黑 # 316 Acero inoxidable Cromo Negro		
Operating Temperature Range / 工作溫度範圍 Rango de temperatura de funcionamiento	-30 °C / +50 °C		
Operating Humidity -工作濕度 Humedad de funcionamiento	0~90%, non-condensing-不結霜 sin condensación		
Ingress Protection/ 防護等級 Protección de ingreso	IP67		
Mech impact protection 機械衝擊保護 Protección contra impactos mecánicos	IK10		
Dimension-尺寸-Dimensión	Dia 20mm x H: 45mm or Dia 30mm x H: 47mm		
Comply Testing Standard 符合測試標準 Cumplir el estándar de prueba	LED Luminaries: LVD: IEC 60598-1; IEC 60598-2-1; IEC62471; IEC 62031; IEC62471, ROHS TM21-L70 LED Driver: IEC/EN 61347-1; IEC/EN 61347-2-13; IEC/EN 62384; IEC/EN 61000-3-2; IEC/EN 61000-3-3; IEC/EN61574; EN 55015 ; IEC /EN 62384		
Certification-認證-Certificación	       		

Project	Fixture#	Date
		Firm



Ordering Information


Choose the option that suits your need and write its corresponding code on the appropriate line to form the product code.


Example product code: [WEER-1W](#)

WEER - 1W
Power Consumption

Power Consumption	
Code	Description
1W	1W

BEAM ANGLE

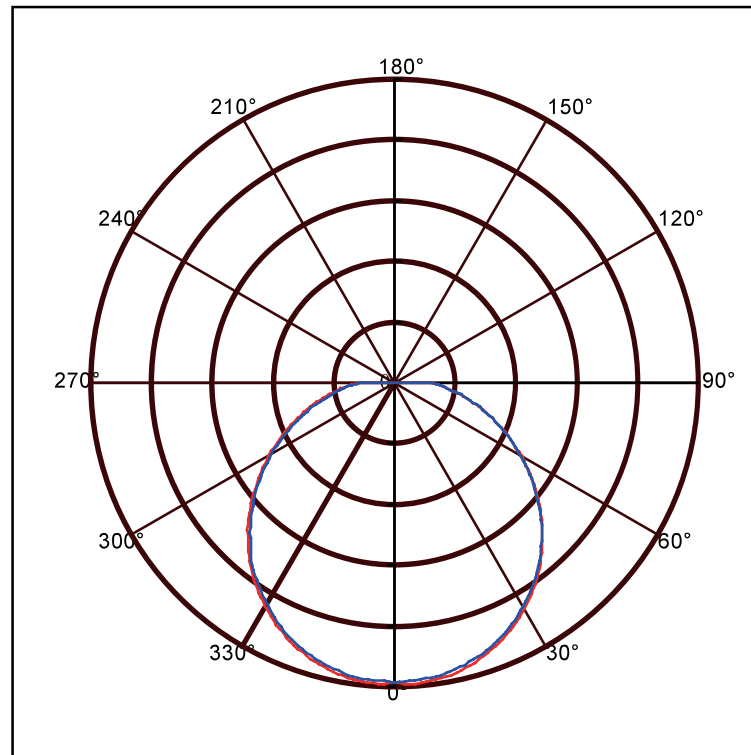

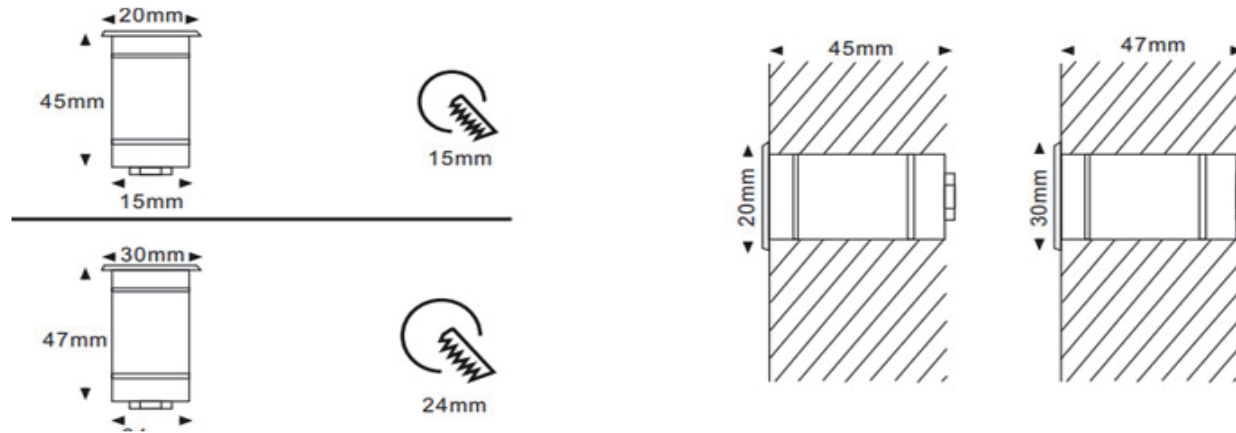

Unit: mm