

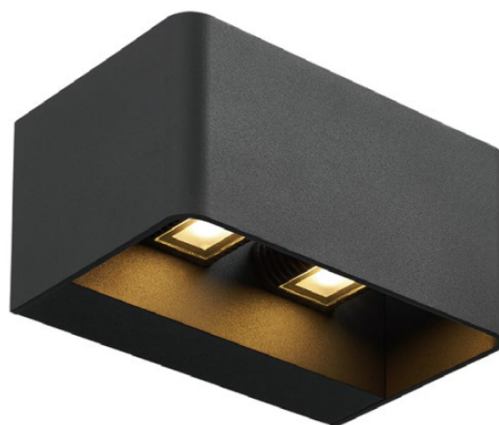
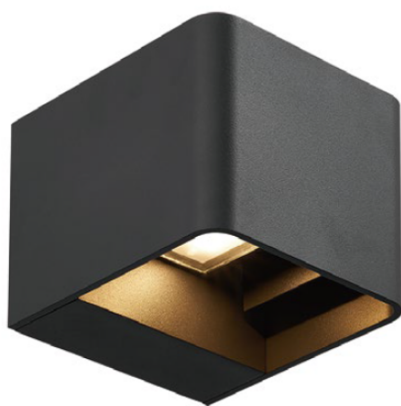
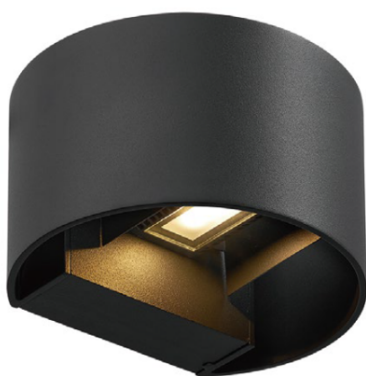



## WEGRY

9W & 18 W



The lighting body made by die-casting aluminum, extruded aluminum cover. LED module is used inside, and the light angle can adjustable. Surface anti-ultraviolet pure polyester powder painting, Corrosion resistance can be more than 1000 hours.

## Technical Data

|                                                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                     |                 |
|---------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|-----------------|
| Installation method / 安裝方式 / Tipo de luminaria<br>método de instalación         | Wall Mounted Type / 壁掛式 / Tipo montado en la pared                                                                                                                                                                                                                                                                                                                                                                                          |                                     |                 |
| Dimension / 尺寸 / Dimensión                                                      | Refert to Drawing                                                                                                                                                                                                                                                                                                                                                                                                                           |                                     |                 |
| Power Consumption / 燈具功率<br>Consumo de energía                                  | 9W / 18W                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                     |                 |
| Input Voltage / 輸入電壓 / Voltaje de entrada                                       | AC220-240V 50/60HZ                                                                                                                                                                                                                                                                                                                                                                                                                          |                                     |                 |
| LED Driver Type<br>LED驅動款式<br>Tipo de controlador LED                           | Integrated or Remoted Type LED Driver--Refer to LED driver specification<br>請參閱LED驅動器規格Consulte la especificación de controlador de LED<br>1. ON/OFF Switch AC 220-240V 50/60HZ<br>2. 1-10V Dimming Driver (1%-100%) AC220-240V 50/60HZ<br>3. DALI 1 or DALI 2 Dimming Driver(1%-100%) AC220-240V 50/60HZ<br>4. Motion Sensor control<br>5. Emergency Backup >2 hours or >3 hours @ < 24 charger hours應急電池/Copia de seguridad de emergencia |                                     |                 |
| LED Driver Features / 驅動特性<br>Funciones del controlador de LED                  | Power Factor >0.9<br>Total Harmonic Distortion < 20%                                                                                                                                                                                                                                                                                                                                                                                        |                                     |                 |
| Light Source Brand / 光源品牌 / Fuente de luz de marca                              | CREE                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                     |                 |
| Beam Angle / 光束角 / ángulo de haz                                                | Symmetric: 100°                                                                                                                                                                                                                                                                                                                                                                                                                             |                                     |                 |
| Lumen Maintenance LM-80 Reported by TM-21 @25degree                             | L70 > 54,000 hrs                                                                                                                                                                                                                                                                                                                                                                                                                            |                                     |                 |
| LED Life / LED壽命 / La vida del LED                                              | >100,000 hours                                                                                                                                                                                                                                                                                                                                                                                                                              |                                     |                 |
| Color Temperature / 色溫<br>Temperatura del color                                 | 2700K / 3000K / 4000K/ 5000K / 6500K                                                                                                                                                                                                                                                                                                                                                                                                        |                                     |                 |
| Color Rendering Index / 顯色指數<br>Índice de reproducción cromática                | > 80                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                     |                 |
| MacAdam Ellipses Binning<br>麥克亞當橢圓分級<br>Mac Adam binning elipse                 | Standard Deviation Colour Matching < 3 SCDM<br>標準偏差配色< 3 SCDM<br>Coincidencia de color estándar Desviación                                                                                                                                                                                                                                                                                                                                  |                                     |                 |
| Luminaire Efficacy / 燈具效率<br>La eficacia de la luminaria                        | 75 lm/w (2700K),<br>85 lm/w (5000K),                                                                                                                                                                                                                                                                                                                                                                                                        | 80 lm/w (3000K),<br>85 lm/w (6500K) | 80lm/w (4000K), |
| LED Source Luminous Efficacy / LED光源光效<br>Fuente luminosa LED Eficacia          | 130lm/w(2700K),<br>150lm/w(5000K),                                                                                                                                                                                                                                                                                                                                                                                                          | 130lm/w(3000K),<br>150lm/w(6500K)   | 140m/w(4000K),  |
| Housing materials / 外殼材料<br>Materiales de la carcasa                            | Die-cast aluminum and tempered glass diffuser<br>壓鑄鋁和強化玻璃擴散器<br>Difusor de aluminio fundido a presión y vidrio templado                                                                                                                                                                                                                                                                                                                     |                                     |                 |
| Housing Color / 外殼顏色<br>color de la carcasa                                     | Polyester powders Coating--Matte Black RAL9005<br>聚酯粉末塗料—啞光黑 RAL 9005<br>Revestimiento en polvo de poliéster: negro mate RAL 9005                                                                                                                                                                                                                                                                                                           |                                     |                 |
| Ingress Protection / 防護等級<br>Protección de ingreso                              | IP65                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                     |                 |
| Mech impact protection / 機械衝擊保護<br>Protección contra impactos mecánicos         | IK08                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                     |                 |
| Operating Temperature Range / 工作溫度範圍<br>Rango de temperatura de funcion amiento | -20 °C / + 40 °C                                                                                                                                                                                                                                                                                                                                                                                                                            |                                     |                 |
| Operating Humidity / 工作濕度<br>Humedad de funcionamiento                          | 0~100%, non-condensing / 不結霜<br>sin condensación                                                                                                                                                                                                                                                                                                                                                                                            |                                     |                 |
| Certification / 認證 / Certificación                                              |                                                                                              |                                     |                 |

|         |          |      |
|---------|----------|------|
| Project | Fixture# | Date |
|         |          | Firm |

# Ordering Information

Choose the option that suits your need and write its corresponding code on the appropriate line to form the product code.

Example product code: [WEGRY-9W](#)


WEGRY - -


[Power Consumption](#)

| <a href="#">Power Consumption</a> |             |
|-----------------------------------|-------------|
| Code                              | Description |
| <a href="#">9W</a>                | 9W          |
| <a href="#">18W</a>               | 18W         |



## Beam Angle

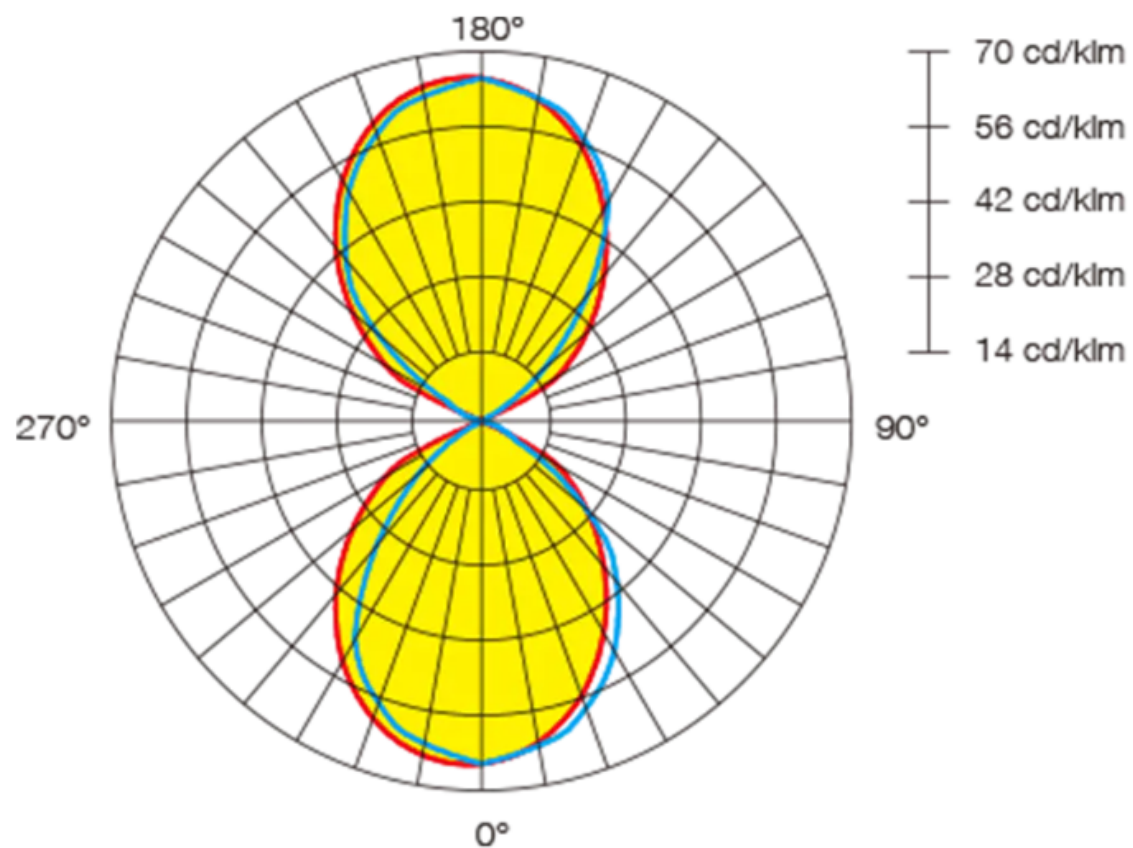

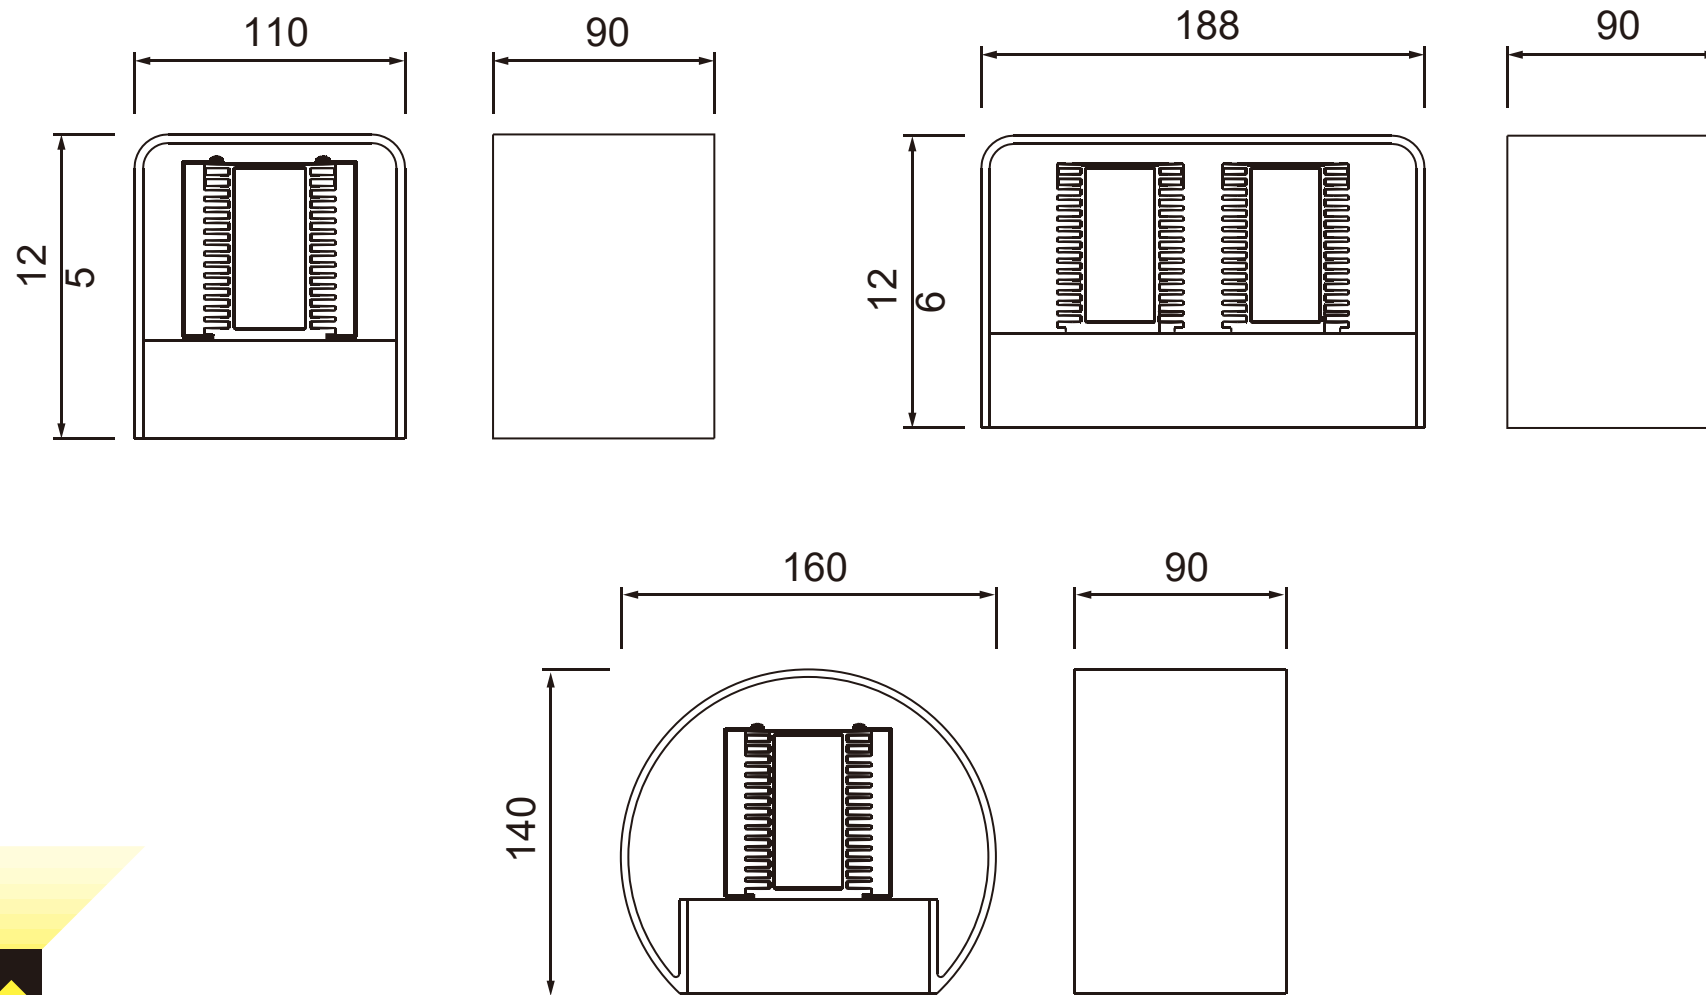

Unit: mm

