



ACE-S


25W Max

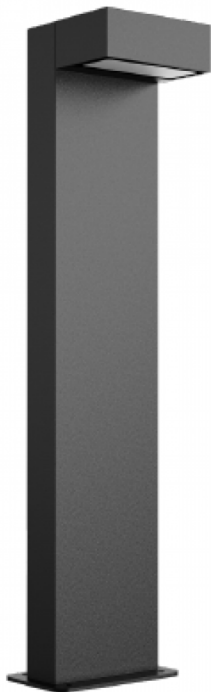

12W

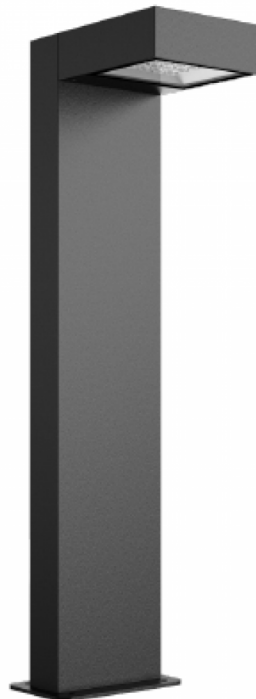






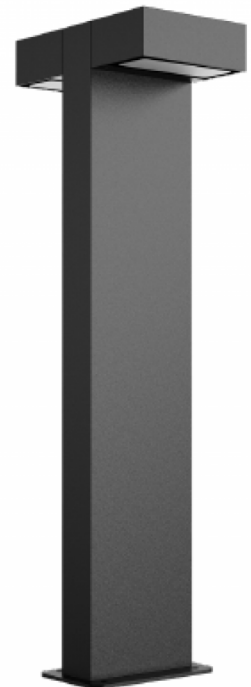

25W



2*12W

- Aluminum die casting cover, extruded aluminum body, it can be cut different height.
- Optics with PC lens with high visual comfortable and uniform lighting distribution,multiple light distribution options.
- High quality LED chips, Driver with 0-10V/DALI/programmed options.
- LED module is used inside, which is easy to install and replace.Surface anti-ultraviolet pure polyester powder painting, Corrosion resistance can bemoore than 1000 hours.
- No photo-biological risk, (no risk linked to infrared, blue light and UV radiation) inaccordance with EN62471:2008.

Technical Data

Installation method / 安裝方式 / Tipo de luminaria	Surface Mounted Type / 明裝式燈具 / Superficie Tipo Montado
Dimension / 尺寸 / Dimensión	<ul style="list-style-type: none"> • W:200x D: 205 x H: 800 mm or H: 900 mm or H: 1000 mm • W:200x D: 300 x H: 800 mm or H: 900 mm or H: 1000 mm • W:200x D: 336 x H: 800 mm or H: 900 mm or H: 1000 mm
Power Consumption Max. / 燈具功率 Consumo de energía Max.	<ul style="list-style-type: none"> • W:200x D: 205 x H: 800 mm or H: 900 mm or H: 1000 mm : 12W • W:200x D: 300 x H: 800 mm or H: 900 mm or H: 1000 mm : 25W • W:200x D: 336 x H: 800 mm or H: 900 mm or H: 1000 mm : 24W (2x12W)
Input Voltage / 輸入電壓 / Voltaje de entrada	AC 220-240V 50/60Hz
LED Driver Type / LED驅動款式 Tipo de controlador LED	Integrated-type LED Driver--Refer to LED driver specification 請參閱LED驅動器規格 Consulte la especificación de controlador de LED 1. ON/OFF Switch AC220-240V 50/60HZ 2. 0/1 -10V Dimming Driver AC220-240V 50/60HZ 3. DALI Dimming Driver AC220-240V 50/60HZ
LED Driver Features / 驅動特性 Funciones del controlador de LED	Power Factor : PF>0.9
Control Protocol / 控制協議 Protocolo de Control	0/1-10V / DALI
Beam Angle / 光束角 / ángulo de haz	<ul style="list-style-type: none"> • Symmetric: T1 • Asymmetric: T2A T3A T4A
Light Source Brand / 光源品牌 / Fuente de luz de marca	Lumileds
"Lumen Maintenance LM-80 Reported by TM-21"	54,000 hours
LED Life / LED壽命-La vida del LED	>100,000 hours
Color Temperature / 色溫 Temperatura del color	2700K / 3000K / 4000K / 5000K / 6500K
Color Rendering Index / 顯色指數 Índice de reproducción cromática	>80
MacAdam Ellipses Binning 麥克亞當橢圓分級 Mac Adam binning elipse	Standard Deviation Colour Matching < 3 SDCM 標準偏差配色 < 3 SDCM Coincidencia de color estándar Desviación < 3 SDCM
Luminaire Efficacy / 燈具效率 / La eficacia de la luminaria	110Lm/w (2700K/3000K), 120 Lm/w (4000K), 130 Lm/w (5000K), 130Lm/w (6500K),
LED Source Luminous Efficacy / LED光源光效 Fuente luminosa LED Eficacia	160 Lm/w(3000K), 180 Lm/w(4000K), 190 Lm/w(5000K), 190 Lm/w(6500K),
Housing materials / 外殼材料 Materiales de la carcasa	Die-casting aluminium body, super white tempered glass 壓鑄鋁合金機身, 超白強化玻璃
Housing Color / 外殼顏色 color de la carcasa	Black 黑色 Negro RAL9005 Grey 灰色 Gris RAL9006 Graphite 石墨色 RAL 7024 Signal White 白 RAL9003
Ingress Protection / 防護等級 Protección de ingreso	IP65
Operating Temperature Range / 工作溫度範圍 Rango de temperatura de funcionamiento	-20 °C / +40 °C
Operating Humidity / 工作濕度 Humedad de funcionamiento	0~90%, non-condensing / 不結霜 sin condensación
Mech impact protection / 機械衝擊保護 Protección contra impactos mecánico	IK08
Comply Testing Standard 符合測試標準 Cumplir el estándar de prueba	LED Luminaries: IEC/EN 60598-1 ; IEC/EN 60598-2-1; IEC TR 62778; IEC 62031 LED Driver: IEC 61347-1; IEC 61347-2-13; EN 55015; IEC 61000-3-2; IEC 61000-3-3; IEC 61547; EN 62384
Certification-認證-Certificación	      

Project	Fixture#	Date
		Firm



Ordering Information


Choose the option that suits your need and write its corresponding code on the appropriate line to form the product code.




Example product code: [ACE-S](#)

ACE-S - - _____
Power Consumption

Power Consumption	
Code	Description
12W	12W@ W:200x D: 205 x H: 800 mm or H: 900 mm or H: 1000 mm
25W	25W@W:200x D: 300 x H: 800 mm or H: 900 mm or H: 1000 mm
24W	24W@ W:200x D: 336 x H: 800 mm or H: 900 mm or H: 1000 mm

BEAM ANGLE

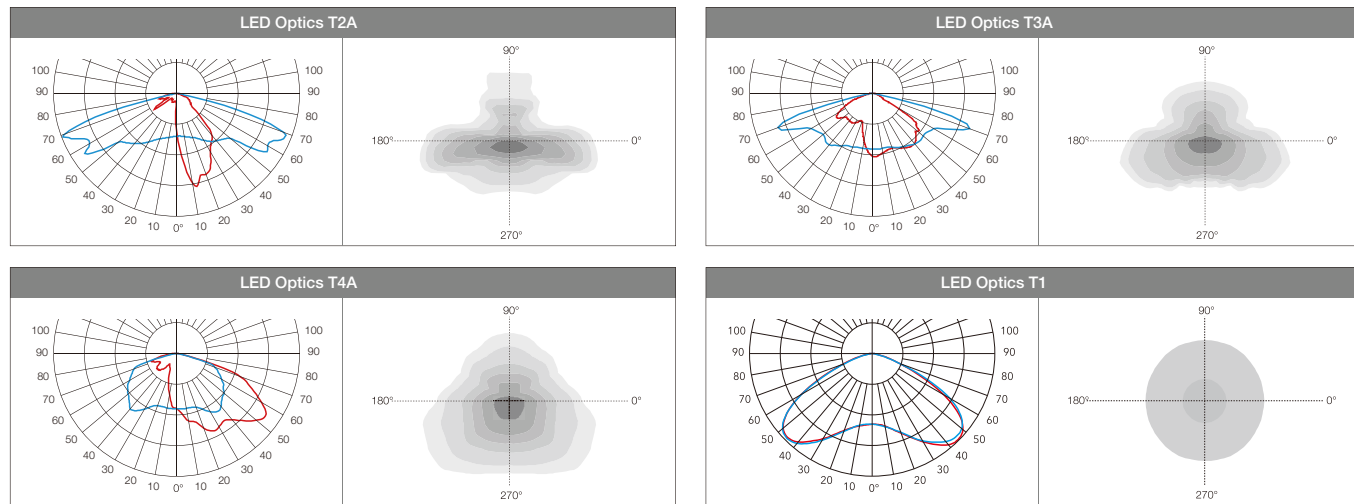

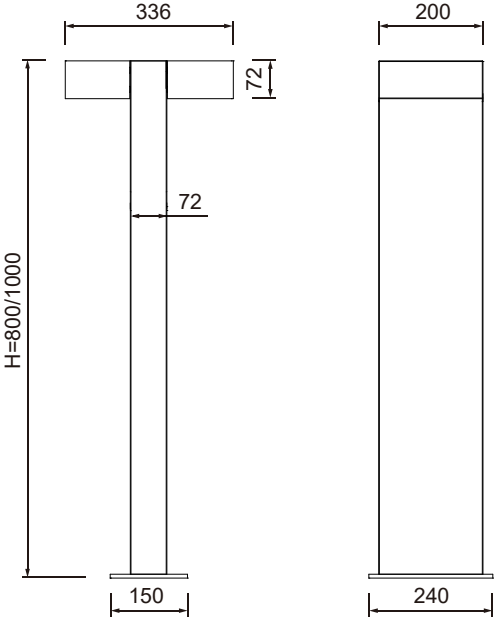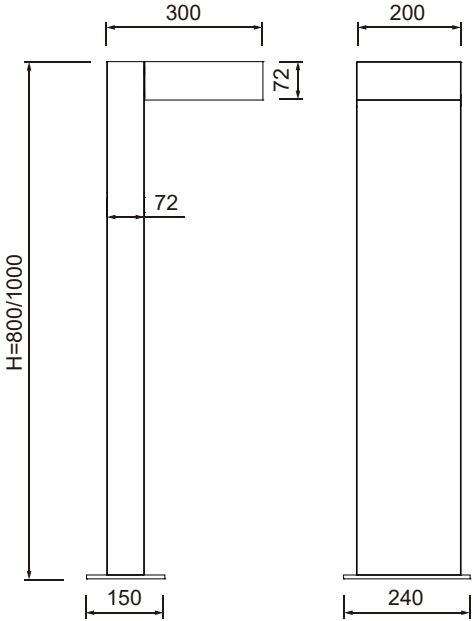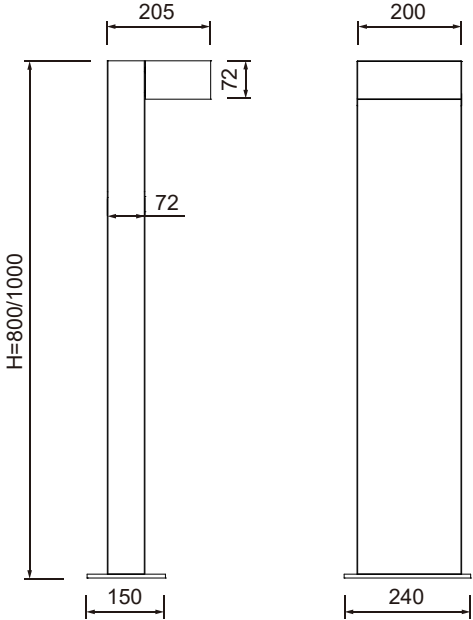

Accessories options



Terminal Box



Anchor Bolts



Expansion Bolts

Unit: mm