


ACE-X

12W Max IP65



Aluminum die casting base and heatsink, extruded aluminum alloy body.
Super white frosted tempered glass. with high visual comfort light distribution, different optical be option.
Surface anti-ultraviolet pure polyester powder painting, Corrosion resistance can be more than 1000 hours.
No photo-biological risk, in accordance with EN 62471:2008.
IP65, IK08

Technical Data

Luminaire Type-安裝方式Tipo de luminaria	Wall Mounted Type壁掛式 Tipo montado en la pared
Dimension-尺寸-Dimensión	• Up or Down Light : L60 x W56 x H128 mm • Up and Down Light: L60 x W56 x H158 mm
Power Consumption Max-燈具功率 Consumo de energía Max	• Up or Down Light : 6W • Up and Down Light: 2 x 6W
Input Voltage-輸入電壓-Voltaje de entrada	AC220-240V 50/60HZ
LED Driver Type LED驅動款式 Tipo de controlador LED	Integrated-type LED Driver--Refer to LED driver specification 請參閱LED驅動器規格 Consulte la especificación de controlador de LED 1. ON/OFF Switch AC220-240V 50/60HZ 2. 1-10V Dimming Driver AC220-240V 50/60HZ 3. Dali Dimming Driver AC220-240V 50/60HZ 4. Remote Emergency Backup >2 hours or >3 hours @ < 12 charger hours應急電池/Copia de seguridad de emergencia
LED Driver Features驅動特性 Funciones del controlador de LED	Power Factor / 功率因數/Factor de potencia: >0.9 Total Harmonic Distortion/總諧波失/Distorsión armónica total: THD<20%
Light Source Brand-光源品牌-Fuente de luz de marca	CREE
Beam Angle光束角ángulo de haz	80°
"Lumen Maintenance LM-80 Reported by TM-21"@25degree	L70 > 60,000 hrs
LED Life-LED壽命-La vida del LED	>60,000 hours
Color Temperature -色溫 Temperatura del color	2700K / 3000K / 4000K/ 6500K
Color Rendering Index-顯色指數 Índice de reproducción cromática	> 80
MacAdam Ellipses Binning 麥克亞當橢圓分級 Mac Adam binning ellipse	Standard Deviation Colour Matching < 3 SCDM 標準偏差配色 < 3 SCDM Coincidencia de color estándar Desviación
Luminaire Efficacy燈具效率 La eficacia de la luminaria	40 Lm/w(2700K) 40Lm/w(3000K) 50Lm/w(4000K) 55Lm/w(6500K)
LED Source Luminous EfficacyLED光源光效 Fuente luminosa LED Eficacia	130 Lm/w(2700K), 130 Lm/w(3000K), 140 Lm/w(4000K), 150 Lm/w(6500K)
Housing materials-外殼材料 Materiales de la carcasa	Die-cast aluminum and Frost tempered glass壓鑄鋁和磨砂鋼化玻璃 Aluminio fundido a presión y vidrio templado
Housing Color外殼顏色 color de la carcasa	Polyester powders Coating--Black RAL9005 / Grey RAL9006 / White RAL9003 聚酯粉末塗料—啞光黑 RAL 9005 / 灰色 RAL 9006 / 啞光白 RAL 9003 Revestimiento en polvo de poliéster: negro mate RAL 9005 / gris RAL 9006 / blanco mate RAL 9003
Ingress Protection-防護等級 Protección de ingreso	IP65
Mech impact protection 機械衝擊保護 Protección contra impactos mecánicos	IK08
Operating Temperature Range / 工作溫度範圍 Rango de temperatura de funcionamiento	-30 °C / +50 °C
Operating Humidity -工作濕度 Humedad de funcionamiento	0~90%, non-condensing-不結霜 sin condensación
Comply Testing Standard 符合測試標準 Cumplir el estándar de prueba	LED Luminaries: EN 60598-1;EN 60598-2-1; IEC TR62778 IEC62471 ; IEC 62031; RoHS LED Driver: IEC/EN 61347-1; IEC/EN 61347-2-13; IEC/EN 62384; IEC/EN 61000-3-2; IEC/EN 61000-3-3;IEC/EN61574;EN 55015
Certification-認證-Certificación	     

Project	Fixture#	Date
		Firm



Ordering Information


Choose the option that suits your need and write its corresponding code on the appropriate line to form the product code.

Example product code: [ACE-X-6W](#)


ACE-X - -
[Power Consumption](#)

Power Consumption	
Code	Description
6W	6W @Down Light or Up Light
12W	2x6W @Down Light and Up Light

BEAM ANGLE

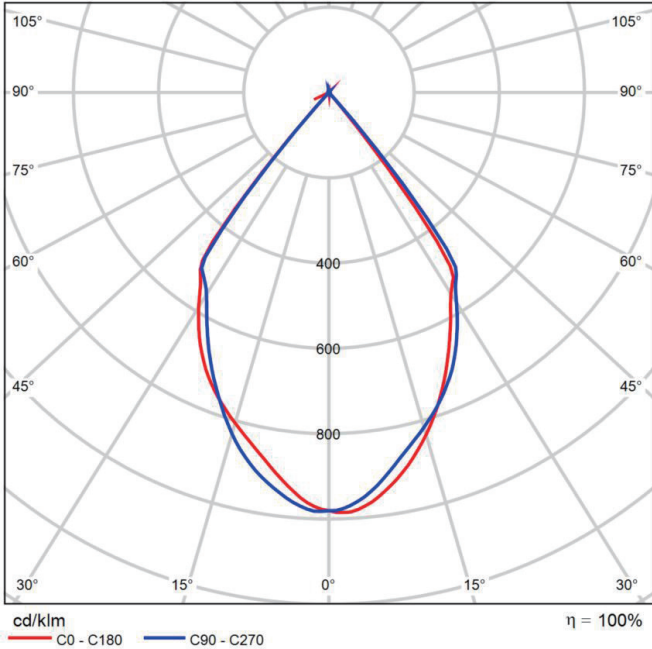


6W

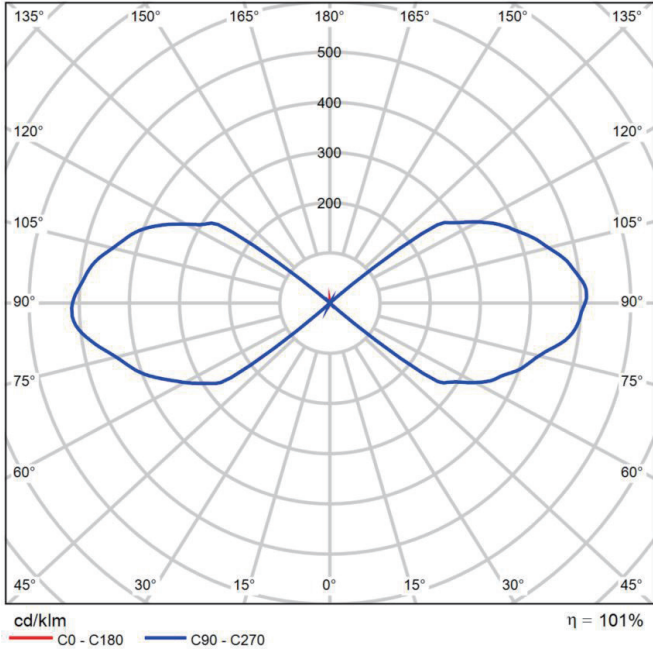


2x6W

Technical Drawing

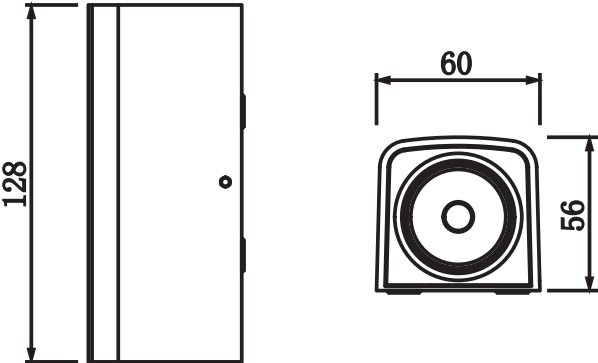

6W

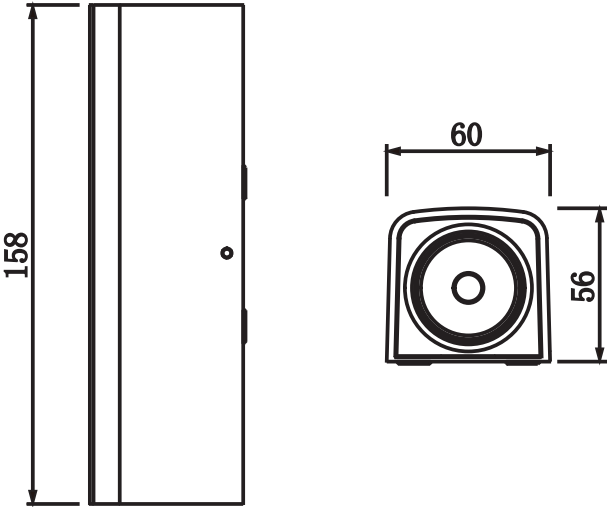

2x6W

Unit: mm