







AMOS

6W-10W IP65



- Housing Material: die-cast aluminium with powder-coated and polyester and high transmission opal polycarbonate
- Silicone-sponge Gasket and vandal resistant Screws
- Anti UV opal polycarbonate diffuser.
- LED module: SMD LEDs with UL 94-V0 Aluminium Circuit Board .
- Ingress-protected IP65 and Mech impact protection : IK10

Technical Data

Luminaire Type 安裝方式 Tipo de luminaria	Surface Mounted Type 明裝式燈具 Superficie Tipo Montado Wall mounted or Ceiling Mounted 壁掛式或吸頂式燈具 Montado en la pared o en el techo		
Dimension-尺寸-Dimensión	W:135 x L:220 x H:55mm		
Input Voltage-輸入電壓-Voltaje de entrada	AC100-240V 50/60Hz		
Power Consumption Max-燈具功率 Consumo de energía Max	<ul style="list-style-type: none"> • 6W • 8W • 10W 		
LED Driver Type LED驅動款式 Tipo de controlador LED	Integrated-type TWIN LED Drivers for Two LED circuit Integrated-type SINGLE LED Drivers for One LED circuit Integrated-type LED Driver--Refer to LED driver specification 請參閱LED驅動器規格 Consulte la especificación de controlador de LED <ul style="list-style-type: none"> • ON/OFF Switch AC220-240V 50/60HZ • 1-10V Dimming Driver AC220-240V 50/60HZ • Dali Dimming Driver AC220-240V 50/60HZ 		
LED Driver Features 驅動特性 Funciones del controlador de LED	POWER FACTOR : PF>0.90 @ Full Load TOTAL HARMONIC DISTORTION: THD< 20%		
Beam Angle 光束角 ángulo de haz	120°		
Light Source Brand-光源品牌-Fuente de luz de marca	Osram LED		
LED Life-LED壽命-La vida del LED	L70> 54,000 hrs		
Color Temperature -色溫 Temperatura del color	2700K / 3000K / 4000K / 5000K / 6500K		
Color Rendering Index-顯色指數 Índice de reproducción cromática	> 80		
Luminaire Efficacy 燈具效率 La eficacia de la luminaria	100 Lm/w(2700K), 120 Lm/w(5000K),	100Lm/w(3000K), 120 Lm/w(6500K),	110 Lm/w(4000K),
LED Source Luminous Efficacy LED光源光效 Fuente luminosa LED Eficacia	140 Lm/w(2700K), 160 Lm/w(5000K),	140 Lm/w(3000K), 160 Lm/w(6500K),	150 Lm/w(4000K),
Housing materials-外殼材料 Materiales de la carcasa	Die-cast aluminium and Anti UV Opal Polycarbonate 壓鑄鋁和抗紫外線乳白PC罩 Aluminio fundido a presión y policarbonato opalino anti UV.		
Housing Color 外殼顏色 color de la carcasa	<ul style="list-style-type: none"> • Matte Black 啞光黑色 Negro mate • Matte white 啞光白色 Blanco mate 		
Ingress Protection-防護等級 Protección de ingreso	IP65		
Mech impact protection 機械衝擊保護 Protección contra impactos mecánicos	IK10		
Comply Testing Standard 符合測試標準 Cumplir el estándar de prueba	LED Luminaires: IEC/ EN 60598-1 / EN 60598-2-1 / EN 62031 / EN 62493 / IEC/EN 62471 / IEC 62031 EN 55015 / EN 61000-3-2 / EN 61000-3-3 / EN 61547 IEC TR62778 LED Driver: EN 55015 / EN 61000-3-2 / EN 61347-1 / EN 61347-2-13 / EN 61547 / EN 62384		
Certification-認證-Certificación	     		

Project	Fixture#	Date
		Firm



Ordering Information

Choose the option that suits your need and write its corresponding code on the appropriate line to form the product code.


Example product code: [AMOS-6W](#)

AMOS - - _____
Power Consumption


Power Consumption	
Code	Description
6W	6W
8W	8W
10W	10W

BEAM ANGLE

120°

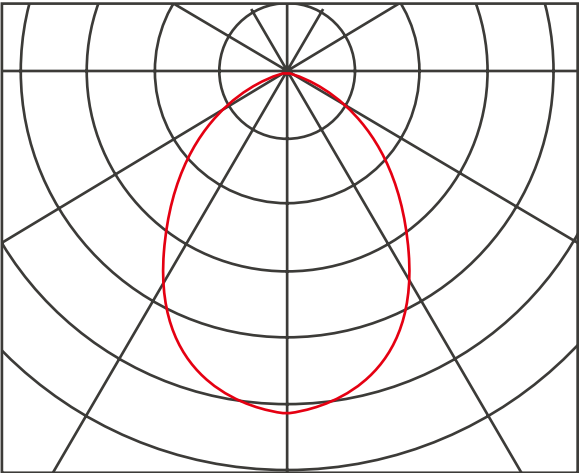

Technical Drawing

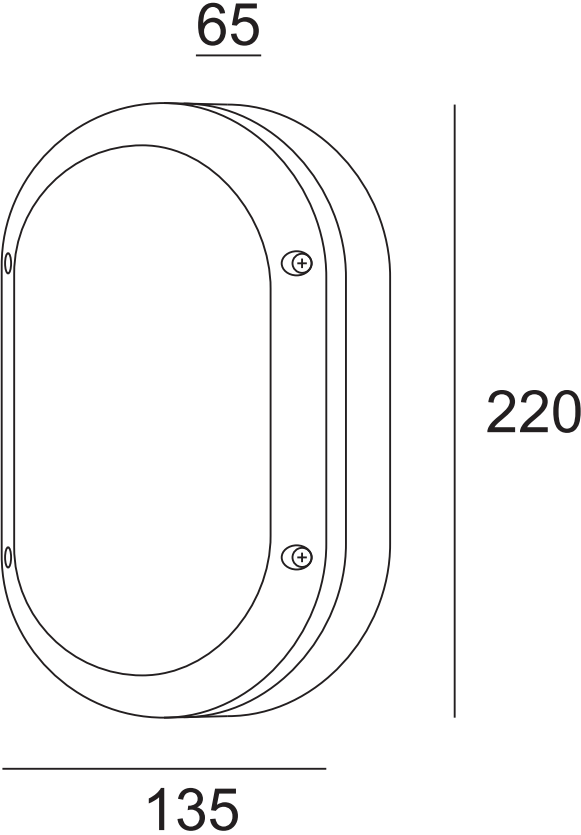

Installation Instructions

