


## ARUA-TON

Dia 270mm Max 25W IP65




- Housing finished : Die-cast aluminium base with vandal resistant Opal Polycarbonate diffuser which is self-extinguishing fire properties.
- Corrosion -resistance powder coating
- Ingress Protection: IP65 and Mech impact protection: IK10
- Optional Integrated LED Driver : 0-10V, DMX and DALI.

## Technical Data

Luminaire Type-安裝方式-Tipo de luminaria	Ceiling or Wall Mount Type吸頂或吸壁安裝Tipo mount en el techo
Dimension-尺寸-Dimensión	Dia 270 x H:53mm
Power Consumption Max-燈具功率Consumo de energía Max	15W 18W 25W
Input Voltage-輸入電壓-Voltaje de entrada	AC220V-240V 50/60Hz
LED Driver Type LED驅動款式 Tipo de controlador LED	Integrated-type LED Driver--Refer to LED driver specification 請參閱LED驅動器規格 Consulte la especificación de controlador de LED 1. ON/OFF Switch 2. 1-10V Dimming Driver 3. Dali Dimming Driver
LED Driver Features驅動特性 Funciones del controlador de LED	POWER FACTOR : PF>0.90 or PF>0.95 TOTAL HARMONIC DISTORTION: THD<20% Refer to LED driver specification 請參閱LED驅動器規格Consulte la especificación de controlador de LED
Control Protocol-控制協議 Protocolo de Control	1-10V / Dali
Beam Angle光束角ángulo de haz	120°
Light Source Brand-光源品牌-Fuente de luz de marca	SMD LED
"Lumen Maintenance LM-80 Reported by TM-21"@25 °C	L70 > 45,000 hrs
LED Life-LED壽命-La vida del LED	>60,000 hours
Color Temperature -色溫Temperatura del color	2700K / 3000K / 4000K / 5000K / 6000K
Color Rendering Index-顯色指數 Índice de reproducción cromática	> 80 > 90
MacAdam Ellipses Binning 麥克亞當橢圓分級 Mac Adam binning elipse	Standard Deviation Colour Matching < 3 SCDM 標準偏差配色 < 3 SCDM Coincidencia de color estándar Desviación
Luminaire Efficacy燈具效率 La eficacia de la luminaria	90Lm/w(2700K), 90 Lm/w(3000K), 100 Lm/w(4000K), 110Lm/w(5000K), 110 Lm/w(6500K),
LED Source Luminous EfficacyLED光源光效 Fuente luminosa LED Eficacia	130Lm/w(2700K), 140 Lm/w(3000K), 150 Lm/w(4000K), 150Lm/w(5000K), 150 Lm/w(6500K),
Housing materials-外殼材料 Materiales de la carcasa	Die-cast aluminium and Anti UV Polycarbonate OPA diffuser 壓鑄鋁和抗紫外線PC 乳白擴散器 Difusor OPA de Aluminio inyectado y Policarbonato Anti UV
Housing Color外殼顏色color de la carcasa	Sand Black RAL 9005 / Sand Gray RAL9006 砂黑 RAL 9005 / 砂灰色 RAL9006 Negro arena RAL 9005 / Gris arena RAL9006
Ingress Protection-防護等級 Protección de ingreso	IP65
Mech impact protection 機械衝擊保護 Protección contra impactos mecánicos	IK10
Operating Temperature Range / 工作溫度範圍 Rango de temperatura de funcionamiento	-30 °C / +50 °C
Comply Testing Standard 符合測試標準 Cumplir el estándar de prueba	LED Luminaries: LVD: IEC/EN 60598-1;EN / IEC/EN 60598-2-1;IEC62471;IEC/EN 62031; IEC/EN 62493 ; IEC/EN 62471 • LED Driver: IEC/EN 61347-1; IEC/EN 61347-2-13; IEC/EN 62384; IEC/EN 61000-3-2; • IEC/EN 61000-3-3;IEC/EN61574;EN 55015 ; IEC /EN 62384

Certification-認證-Certificación

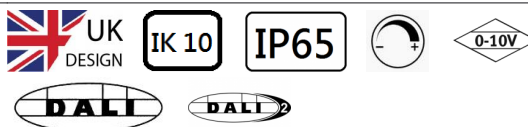

Project	Fixture#	Date
		Firm



## Ordering Information

Choose the option that suits your need and write its corresponding code on the appropriate line to form the product code.

Example product code: [ARUA-15W](#)

ARUA-        -        \_\_\_\_\_  
    [Power Consumption](#)

<a href="#">Power Consumption</a>	
Code	Description
<a href="#">15W</a>	15W
<a href="#">18W</a>	18W
<a href="#">25W</a>	25W

# BEAM ANGLE

