


BOLATY

12W Dia 217mm



- Aluminum die casting cover, extruded aluminum body, it can be cut different height.
- High transparent PC diffuser, it can effectively prevent yellowing and aging.
- Indirect light luminaire for use with led, which has high visual comfortable.
- High quality LED chips, Driver with 0-10V/DALI/programmed options.
- Surface anti-ultraviolet pure polyester powder painting.
- The maximum surface temperature of all accessible part under 50 degrees.

Technical Data

Luminaire Type-安裝方式 Tipo de luminaria	Expansion Bolt Mounting 膨脹螺栓安裝 Montaje de perno de expansión
Dimension-尺寸-Dimensión	Dia 217 × 600mm Dia 217 × 1000mm Refer to Technical Drawing 請參閱技術圖紙 Consulte el dibujo técnico
Power Consumption Max-燈具功率 Consumo de energía Max	12W
Input Voltage-輸入電壓-Voltaje de entrada	AC 100-240V 50/60Hz
LED Driver Type LED驅動款式 Tipo de controlador LED	Integrated-type LED Driver--Refer to LED driver specification 請參閱LED驅動器規格 Consulte la especificación de controlador de LED 1. ON/OFF Switch AC220-240V 50/60HZ 2. 0-10V Dimming Driver AC220-240V 50/60HZ 3. Dali Dimming Driver AC220-240V 50/60HZ
Control Protocol-控制協議 Protocolo de Control	0-10V / Dali
Beam Angle-光束角ángulo de haz	360° Symmetrical Beam Angle
Light Source Brand-光源品牌-Fuente de luz de marca	CREE
"Lumen Maintenance LM-80 Reported by TM-21"	L70> 60,000 hrs
LED Life-LED壽命-La vida del LED	>60,000 hours
Color Temperature -色溫 Temperatura del color	2700K / 3000K / 4000K / 5000K / 6500K
Color Rendering Index-顯色指數 Índice de reproducción cromática	>80
MacAdam Ellipses Binning 麥克亞當橢圓分級 Mac Adam binning elipse	Standard Deviation Colour Matching < 3 SDCM 標準偏差配色< 3 SDCM Coincidencia de color estándar Desviación < 3 SDCM
Luminaire Efficacy燈具效率La eficacia de la luminaria	100Lm/w(2700K), 100 Lm/w(3000K), 110Lm/w(4000K), 120 Lm/w(5000K), 120 Lm/w(6500K),
LED Source Luminous Efficacy LED光源光效 Fuente luminosa LED Eficacia	130Lm/w(2700K), 130 Lm/w(3000K), 140Lm/w(4000K), 150 Lm/w(5000K), 150 Lm/w(6500K),
Housing materials-外殼材料 Materiales de la carcasa	Aluminum alloy , transparent PC cover and stainless steel screws 鋁合金, 透明PC蓋和不銹鋼螺絲 Aleación de aluminio, cubierta de PC transparente y tornillos de acero inoxidable.
Housing Color 外殼顏色 color de la carcasa	Mechanical and chemical anti-corrosion pre-treatment UV-resistant polyester exterior powder-coating system. 機械和化學防腐預處理使用防紫外線粉末塗料體 Pretratamiento mecánico y químico anticorrosión. Sistema de recubrimiento en polvo exterior de poliéster resistente a los rayos UV. Graphite 石墨黑 Grafito RAL 9005 Gray 灰色 Gris RAL 9006 White 白色Blanco RAL9010
Ingress Protection-防護等級 Protección de ingreso	IP66
Mech impact protection 機械衝擊保護 Protección contra impactos mecánicos	IK09
Operating Temperature Range / 工作溫度範圍 Rango de temperatura de funcionamiento	-20 °C / +50 °C
Operating Humidity -工作濕度 Humedad de funcionamiento	0~90%, non-condensing-不結霜 sin condensación
Comply Testing Standard 符合測試標準 Cumplir el estándar de prueba	LED Luminaires:LVD: EN 60598-1 / EN 60598-2-1/ IEC 62031 / EN 62471 IEC 60529 / IEC 62262 / RoHS LED Driver: IEC/EN 61347-1; IEC/EN 61347-2-13; IEC/EN 62384; IEC/EN 61000-3-2; IEC/EN 61000-3-3; IEC/EN 61574; EN 55015
Certification-認證-Certificación	     

Project	Fixture#	Date
		Firm



Ordering Information


Choose the option that suits your need and write its corresponding code on the appropriate line to form the product code.

Example product code: [BOLATY-12W](#)


BOLATY - 12W
[Power Consumption](#)

Power Consumption	
Code	Description
12W	12W @ Type A @ Type B

BEAM ANGLE

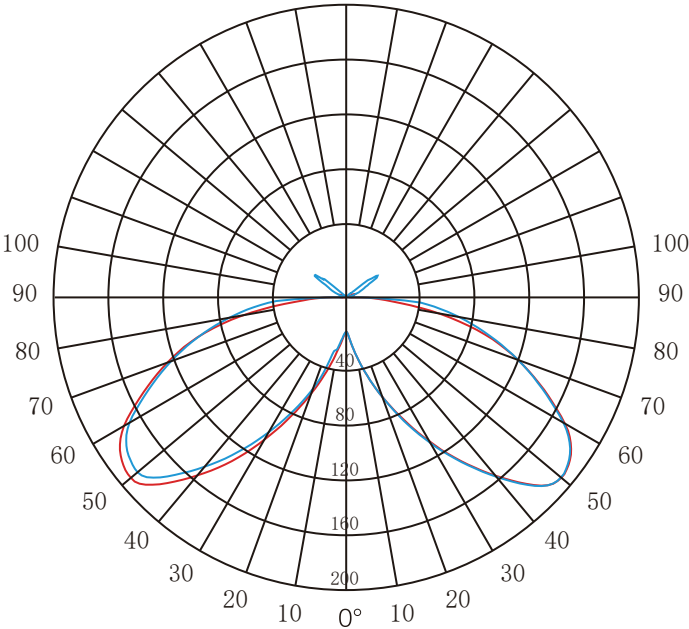


Type A

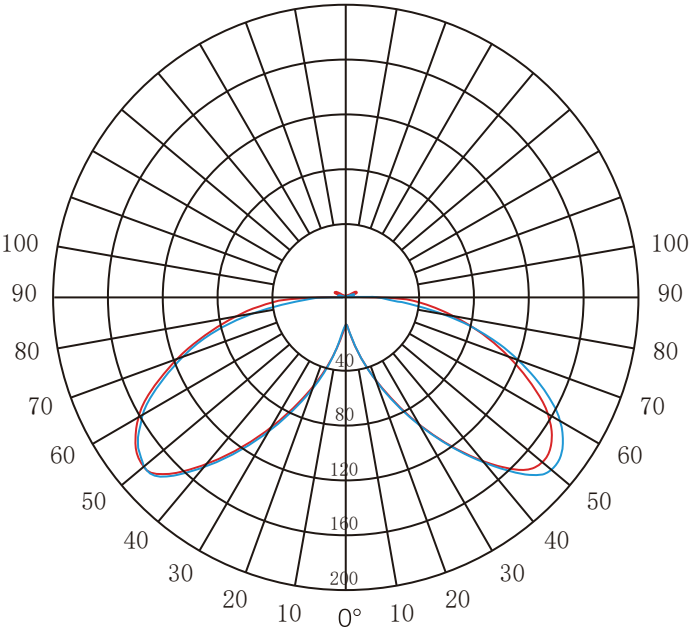

Type B

Technical Drawing

DIMON
TECHNOLOGY

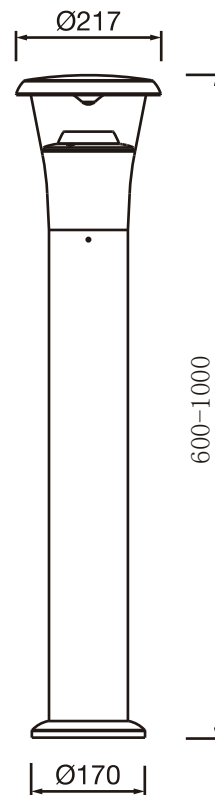

Unit: mm