


BOLATY-F



CB



W105xD80xHXXX mm 7W Max










- LED BOLLARDS LIGHT is one of the modern bollard types.
- The body is made of extruded and die-cast aluminum with Safe Glass, graphene powder coating finish.
- Unique and gorgeous appearance.
- IP65 and IK07.
- Integrated Dali or 1-10v dimmable is available

BOLATY-F

W105xD80xHXXX mm 7W Max

DIMON
TECHNOLOGY

Technical Data

Luminaire Type-安裝方式 Tipo de luminaria	Surface Mounted Type 明裝式燈具 Superficie Tipo Montado
Dimension-尺寸-Dimensión	• W:105 x D: 80 x H: 260 mm • W:105 x D: 80 x H: 400 mm • W:105 x D: 80 x H: 600 mm
Power Consumption Max-燈具功率 Consumo de energía Max	5W 9W
Input Voltage-輸入電壓-Voltaje de entrada	AC 220-240V 50/60Hz
LED Driver Type LED驅動款式 Tipo de controlador LED	Integrated-type LED Driver-Refer to LED driver specification 請參閱LED驅動器規格 Consulte la especificación de controlador de LED 1. ON/OFF Switch AC220-240V 50/60HZ 2. 1-10V Dimming Driver AC100-240V 50/60HZ 3. Dali Dimming 1-100% Driver AC100-240V 50/60HZ
LED Driver Features-驅動特性 Funciones del controlador de LED	POWER FACTOR : PF=0.90 @ Full Load TOTAL HARMONIC DISTORTION: THD< 20% Refer to LED Driver data sheet
Control Protocol-控制協議 Protocolo de Control	1-10V / Dali
Beam Angle-光束角ángulo de haz	90°
Light Source Brand-光源品牌-Fuente de luz de marca	CREE
"Lumen Maintenance LM-80 Reported by TM-21"	Ambient temperature ta = 25 °C > 200,000 h: L 80 B 50 > 100,000 h: L 90 B 50 Ambient temperature ta =50 °C > 65,000 h: L 80 B 50 > 95,000 h: L 70 B 50
LED Life-LED壽命-La vida del LED	>60,000 hours
Color Temperature -色溫 Temperatura del color	2700K / 3000K / 4000K / 5000K / 6500K
Color Rendering Index-顯色指數 Índice de reproducción cromática	>80
MacAdam Ellipses Binning 麥克亞當橢圓分級 Mac Adam binning elipse	Standard Deviation Colour Matching < 3 SDCM 標準偏差配色< 3 SDCM Coincidencia de color estándar Desviación < 3 SDCM
Luminaire Efficacy-燈具效率 La eficacia de la luminaria	60Lm/w(2700K), 60 Lm/w(3000K), 70 Lm/w(4000K), 80 Lm/w(5000K), 80 Lm/w(6500K),
LED Source Luminous Efficacy LED光源光效 Fuente luminosa LED Eficacia	130Lm/w(2700K), 130 Lm/w(3000K), 140 Lm/w(4000K), 150 Lm/w(5000K), 150 Lm/w(6500K),
Housing materials-外殼材料 Materiales de la carcasa	Aluminium and Tempered glass 鋁和鋼化玻璃 Aluminio y vidrio templado
Housing Color 外殼顏色 color de la carcasa	Sand Black 砂黑 arena negra RAL9005 Grey灰色 Gris RAL 9006 White 白 Blanco RAL9003
Ingress Protection-防護等級 Protección de ingreso	IP65
Mech impact protection機械衝擊保護 Protección contra impactos mecánicos	IK07
Operating Temperature Range / 工作溫度範圍 Rango de temperatura de funcionamiento	-20 °C / +50 °C
Operating Humidity -工作濕度 Humedad de funcionamiento	0~90%, non-condensing-不結霜 sin condensación
Comply Testing Standard 符合測試標準 Cumplir el estándar de prueba	LED Luminaires: IEC 60598-1 / IEC 60598-2-1 / Photometric data-IES format LED Driver: EN 55015 / IEC 61000-3-2 / IEC 61347-1 / IEC 61347-2-13 / IEC 61547
Certification-認證-Certificación	      

Project	Fixture#	Date
		Firm

Ordering Information

Choose the option that suits your need and write its corresponding code on the appropriate line to form the product code.


Example product code: [BOLATY-5W](#)

BOLATY - - _____
Power Consumption

Power Consumption	
Code	Description
5W	5W
7W	7W




BEAM ANGLE

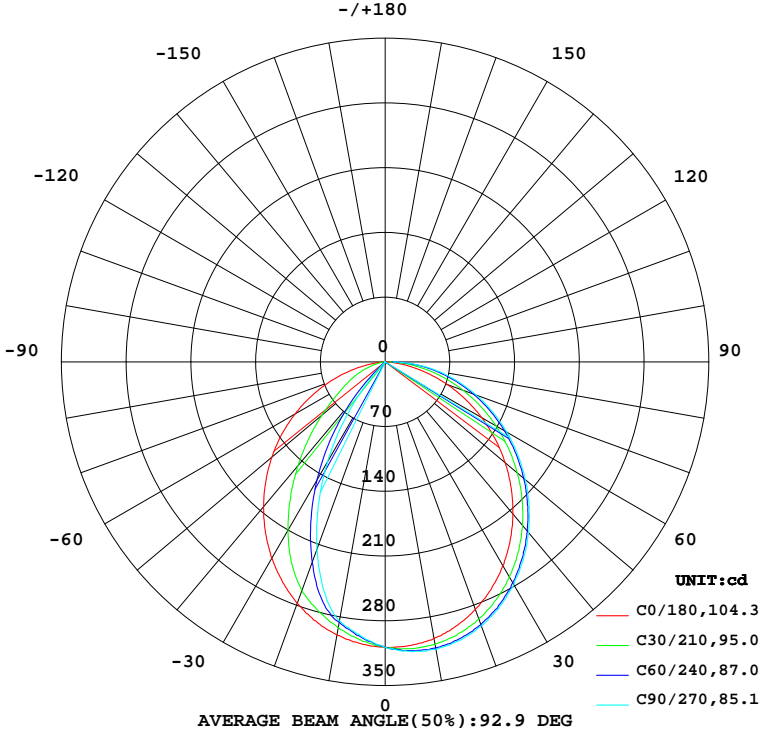

Technical Drawing

Installation Instruction

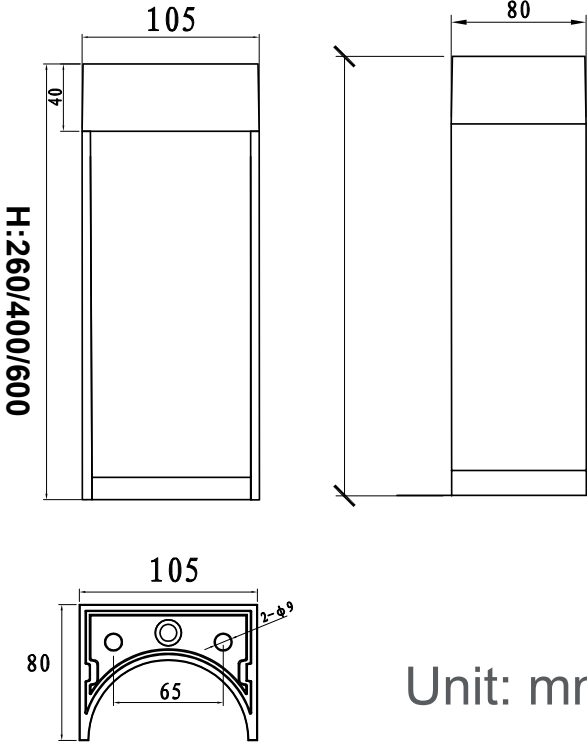

Unit: mm

