


BOUK-P

Dia 140 and Dia170mm



- Lawn light with symmetrical light distribution.
- Integrated constant current control gear.
- Frosted Glass Diffusor

Technical Data

Luminaire Type-安裝方式 Tipo de luminaria	Expansion Mounted Type or Spike Mounted 膨脹螺栓安裝型或長釘安裝 Tipo montado con perno de anclaje de expansión o montado con espiga
Dimension-尺寸-Dimensión	• Dia 140 x H: 150mm 300mm 400mm 600mm 800mm 1000mm • Dia 170 x H: 150mm 300mm 400mm 600mm 800mm 1000mm
Power Consumption Max-燈具功率 Consumo de energía Max	Dia 140mm 4W 6W 8W Dia 170mm 10W 12W 15W
Input Voltage-輸入電壓-Voltaje de entrada	AC220V-240V 50/60Hz
LED Driver Type LED驅動款式 Tipo de controlador LED	Integrated -type LED Driver--Refer to LED driver specification 請參閱LED驅動器規格 Consulte la especificación de controlador de LED 1. ON/OFF Switch AC220-240V 50/60HZ 2. Dali Dimming Driver AC220-240V 50/60HZ 3. DC24V+ DMX Driver AC220-240V 50/60HZ
Control Protocol-控制協議 Protocolo de Control	Dali/ DMX 512
Beam Angle光束角ángulo de haz	360°
Light Source Brand-光源品牌-Fuente de luz de marca	OSRAM LED
"Lumen Maintenance LM-80 Reported by TM-21"	L70(10k) > 60000 hrs
LED Life-LED壽命-La vida del LED	>60,000 hours
Color Temperature -色溫 Temperatura del color	2700K / 3000K / 4000K/ 5000K/ 6500K
Color Rendering Index-顯色指數 Índice de reproducción cromática	>80
MacAdam Ellipses Binning 麥克亞當橢圓分級 Mac Adam binning ellipse	Standard Deviation Colour Matching < 3 SCDM 標準偏差配色 < 3 SCDM Coincidencia de color estándar Desviación < 3 SCDM
Luminaire Efficacy燈具效率 La eficacia de la luminaria	70lm/w(2700K),70lm/w(3000K),75lm/w(4000K),80lm/w(5000K),80lm/w(6500K)
LED Source Luminous Efficacy LED光源光效 Fuente luminosa LED Eficacia	120lm/w(2700K),120lm/w(3000K)130lm/w(4000K),140lm/w(5000K),140lm/w(6500K)
Housing materials-外殼材料 Materiales de la carcasa	Die cast aluminium and Tempered Glass 壓鑄鋁和強化玻璃
Housing Color外殼顏色 color de la carcasa	Mechanical and chemical anti-corrosion pre-treatment UV-resistant polyester exterior powder-coating system. 機械和化學防腐預處理使用防紫外線粉末塗料體 Pretratamiento mecánico y químico anticorrosión. Sistema de recubrimiento en polvo exterior de poliéster resistente a los rayos UV. Matte Black RAL9005 啞光黑色 RAL9005 Negro mateRAL9005 Grey RAL 9006 灰銀色RAL 9006 Gris RAL 9006 White RAL 9003 白色RAL 9003 Blanco RAL 9003 Custom Made客制顏色 Por encargo
Ingress Protection-防護等級 Protección de ingreso	IP65
Operating Temperature Range / 工作溫度範圍 Rango de temperatura de funcionamiento	-20 °C / +50 °C
Operating Humidity -工作濕度 Humedad de funcionamiento	0~90%, non-condensing-不結霜 sin condensación
Comply Testing Standard 符合測試標準 Cumplir el estándar de prueba	LED Luminaries: IEC/EN 60598-1 ; IEC/EN 60598-2-3; IEC TR 62778; IEC 62031 LED Driver: IEC 61347-1; IEC 61347-2-13; EN 55015; IEC 61000-3-2; IEC 61000-3-3; IEC 61547; EN 62384
Certification-認證-Certificación	     

Project	Fixture#	Date
		Firm



Ordering Information

Choose the option that suits your need and write its corresponding code on the appropriate line to form the product code.


Example product code: [BOUK-P-4W](#)






BOUK-P - -

[Power Consumption](#)


Power Consumption	
Code	Description
4W	4W@ Dia 140 x H: 150mm 300mm 400mm 600mm 800mm 1000mm
6W	6W@ Dia 140 x H: 150mm 300mm 400mm 600mm 800mm 1000mm
8W	8W@ Dia 140 x H: 150mm 300mm 400mm 600mm 800mm 1000mm
10W	10W@Dia 170 x H: 150mm 300mm 400mm 600mm 800mm 1000mm
12W	12W@Dia 170 x H: 150mm 300mm 400mm 600mm 800mm 1000mm
15W	15W@Dia 170 x H: 150mm 300mm 400mm 600mm 800mm 1000mm


Beam Angle

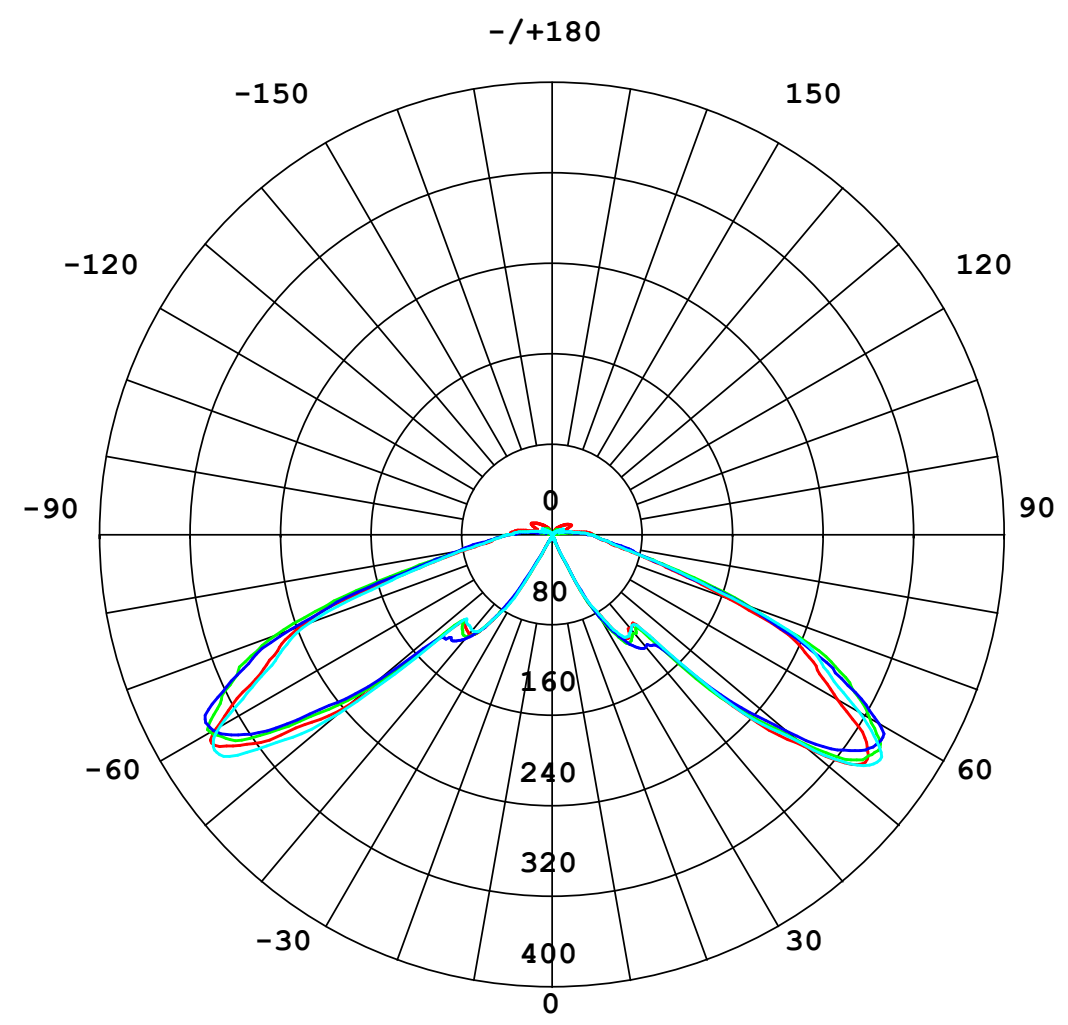

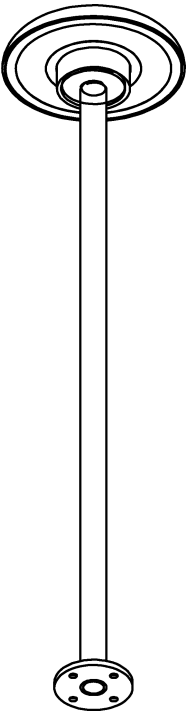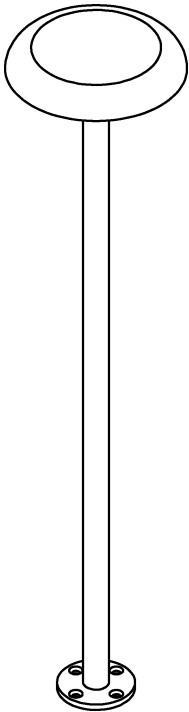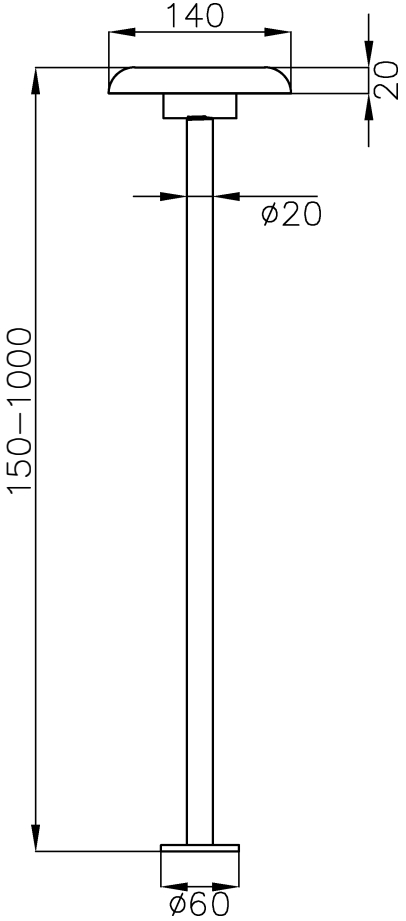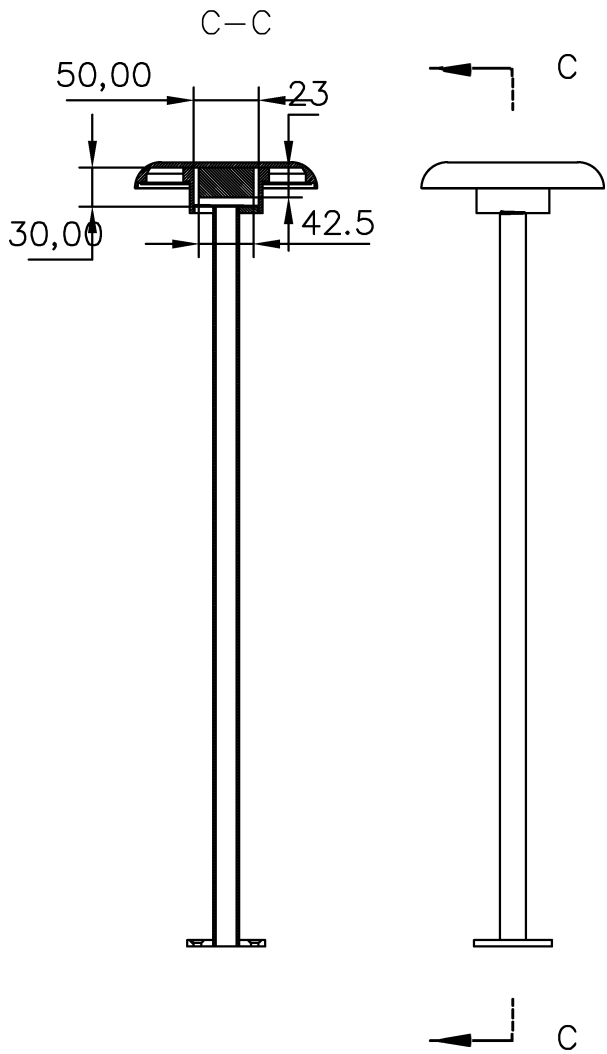

Unit: mm



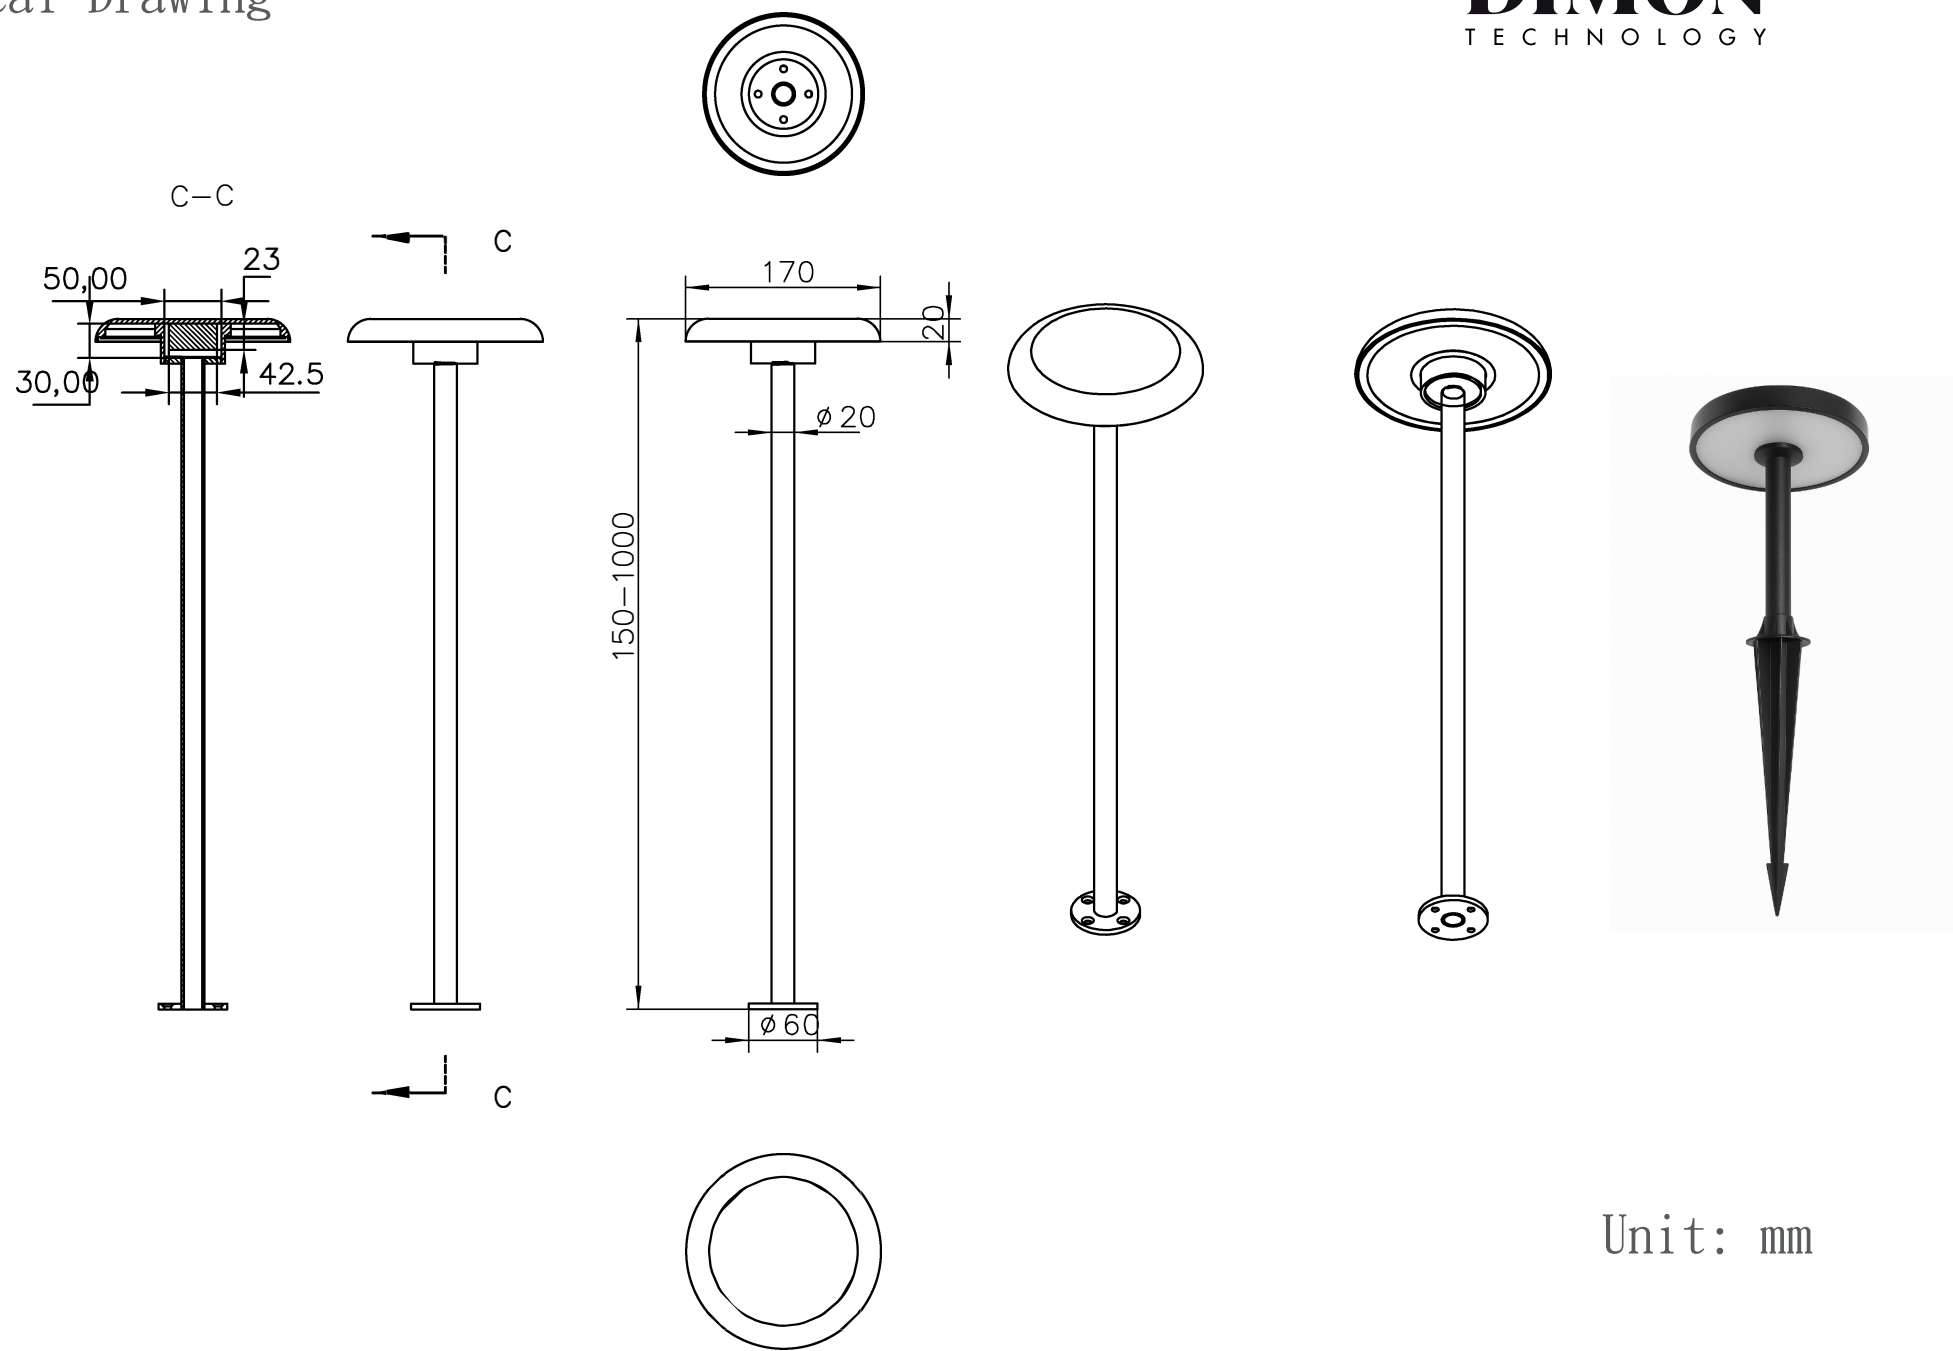

Unit: mm