

BOUSA

Max 10W 50x50mm



- Unique and gorgeous appearance.
- LED BOLLARDS Light with symmetrical light distribution.
- Aluminum Alloy body and Anti-UV PMMA diffuser
- IP65 and IK07.
- Dali or 1-10v dimmable is available.

Technical Data

Luminaire Type-安裝方式 Tipo de luminaria

Surface Mounted with anchor bolts or Spike bracket Mount
明裝或插地安裝
Montaje en superficie con pernos de anclaje o soporte de soporte de punta

Dimension-尺寸-Dimensión	W: 50 x L: 50x H: 400mm W: 50 x L: 50x H: 800mm	W: 50 x L: 50x H: 600mm W: 50 x L: 50x H: 1000mm
Power Consumption Max-燈具功率 Consumo de energía Max	6W 8W 10W	
Input Voltage-輸入電壓-Voltaje de entrada	AC 220-240V 50/60Hz	
LED Driver Type LED驅動款式 Tipo de controlador LED	Integrated-type LED Driver--Refer to LED driver specification 請參閱LED驅動器規格 Consulte la especificación de controlador de LED 1. ON/OFF Switch AC100-240V 50/60HZ 2. 1-10V Dimming Driver AC100-240V 50/60HZ 3. Dali Dimming Driver AC100-240V 50/60HZ	
LED Driver Features-驅動特性 Funciones del controlador de LED	POWER FACTOR : PF≥0.90 TOTAL HARMONIC DISTORTION: THD< 20% Refer to LED Driver data sheet	
Control Protocol-控制協議 Protocolo de Control	1-10V / Dali	
Beam Angle-光束角ángulo de haz	Symmetric Angle 對稱角度 Ángulo simétrico:	
Light Source Brand-光源品牌-Fuente de luz de marca	OSRAM SMD LED	
"Lumen Maintenance LM-80 Reported by TM-21"	L70(10k) > 60,000 hrs	
LED Life-LED壽命-La vida del LED	>60,000 hours	
Color Temperature -色溫 Temperatura del color	2700K / 3000K / 4000K / 5000K / 6500K	
Color Rendering Index-顯色指數 Índice de reproducción cromática	>80 >90	
MacAdam Ellipses Binning 麥克亞當橢圓分級 Mac Adam binning elipse	Standard Deviation Colour Matching < 3 SDCM 標準偏差配色< 3 SDCM Coincidencia de color estándar Desviación < 3 SDCM	
Luminaire Efficacy-燈具效率-La eficacia de la luminaria	60Lm/w(2700K), 60 Lm/w(3000K), 70 Lm/w(4000K), 700 Lm/w(5000K),	
LED Source Luminous Efficacy LED光源光效 Fuente luminosa LED Eficacia	140Lm/w(2700K), 140 Lm/w(3000K), 150Lm/w(4000K), 160 Lm/w(5000K),	
Housing materials-外殼材料 Materiales de la carcasa	Aluminum Alloy and Anti UV PMMA Diffuser 鋁合金和抗紫外線 PMMA 擴散器 Difusor de aleación de aluminio y PMMA anti UV	
Housing Color 外殼顏色 color de la carcasa	Polyester powder Coating--Matte Black RAL 9005 聚酯粉末塗料-啞光黑RAL9005 Recubrimiento de polvo de poliéster - Negro mate RAL 9005	
Ingress Protection-防護等級 Protección de ingreso	IP65	
Mech impact protection 機械衝擊保護 Protección contra impactos mecánicos	IK07	
Accessories 配件 Accesorios	Spike Bracket 插地支架Soporte de punta	
Operating Temperature Range / 工作溫度範圍 Rango de temperatura de funcionamiento	-20 °C / +50 °C	
Operating Humidity -工作濕度 Humedad de funcionamiento	0~90%, non-condensing-不結霜 sin condensación	
Comply Testing Standard 符合測試標準 Cumplir el estándar de prueba	LED Luminaires: IEC 60598-1 / IEC 60598-2-1 LED Driver: IEC/EN 61347-1; IEC/EN 61347-2-13; IEC/EN 62384; IEC/EN 61000-3-2; IEC/EN 61000-3-3;IEC/EN61574;EN 55015	

Certification-認證-Certificación



Project	Fixture#	Date
		Firm

Ordering Information

Choose the option that suits your need and write its corresponding code on the appropriate line to form the product code.



Example product code: [BOUSA-6W](#)

BOUSA - - _____
Power Consumption


Power Consumption	
Code	Description
6W	6W
8W	8W
10W	10W



BEAM ANGLE

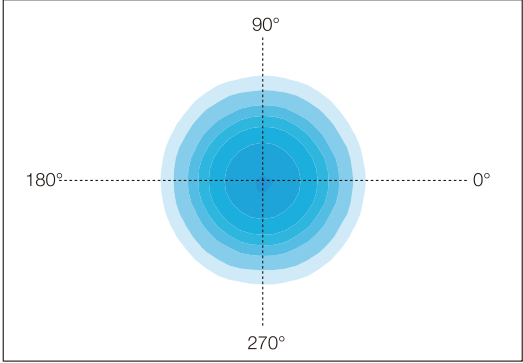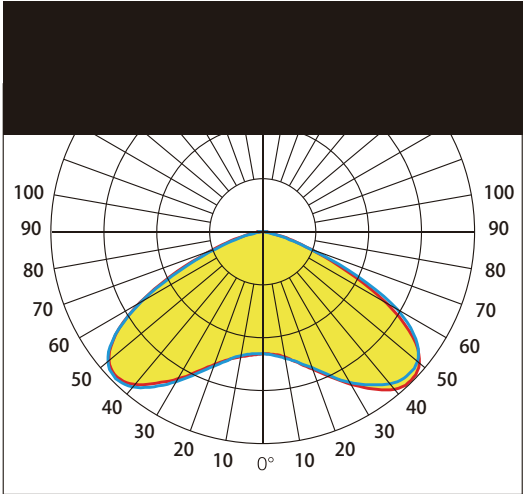

Technical Drawing

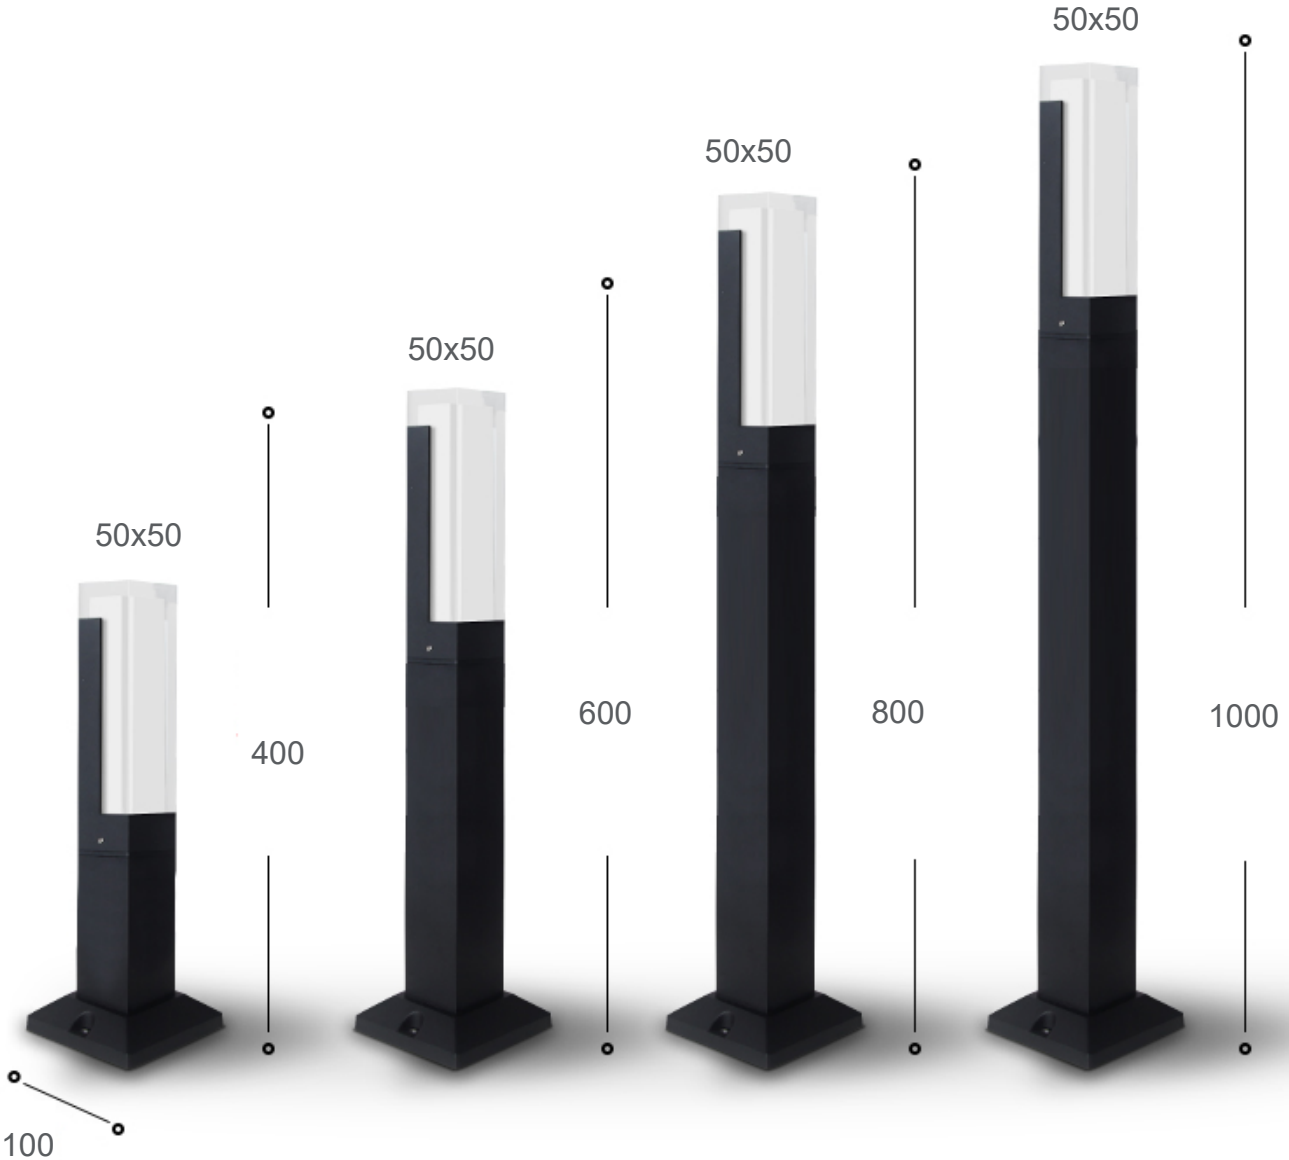

Accessories:



H: 260mm

Unit: mm