


CARNI

Dia 40mm 11W-13W



11W-13W

Decoration Ring Color :



White 白

Golden 金

Decoration Ring Color : Matte Black 黑

Technical Data

Installation method / 安裝方式 Metodo de instalacion	Pendant Mounted / 吊裝式燈具 /
Dimension / 尺寸 / Dimensión	Dia 40 x H 300 mm: Suspension cable colour: White and length Cable : 2000mm Max
Input Voltage / 輸入電壓 / Voltaje de entrada	AC220-240V 50/60HZ
Power Consumption / 燈具功率 Consumo de energia	• 11W • 13W
LED Driver Type / LED驅動款式 Tipo de controlador LED	Integrated-type LED Driver--Refer to LED driver specification 請參閱LED驅動器規格 Consulte la especificación de controlador de LED 1. ON/OFF Switch AC220-240V 50/60HZ 2. 0-10V Dimming Driver AC220-240V 50/60HZ 3. DALI Dimming Driver AC220-240V 50/60HZ
LED Driver Features / 驅動特性 Funciones del controlador de LED	Power Factor: PF>0.90 THD:<20%
Control Protocol / 控制協議 Protocolo de Control	0/1-10V / DALI
Beam Angle / 光束角 / ángulo de haz	18° 24° 36°
Light Source Brand / 光源品牌 / Fuente de luz de marca	COB
"Lumen Maintenance LM-80 Reported by TM-21"	L70 > 54,000 hrs
LED Life / LED壽命 / La vida del LED	>100,000 hours
Color Temperature -色溫 Temperatura del color	2700K / 3000K /3500K/ 4000K / 5000K / 6500K
Color Rendering Index / 顯色指數 Índice de reproducción cromática	> 80 > 90
MacAdam Ellipses Binning 麥克亞當橢圓分級 Mac Adam binning ellipse	Standard Deviation Colour Matching < 3 SDCM 標準偏差配色< 3 SDCM Coincidencia de color estándar Desviación < 3 SDCM
Luminaire Efficacy / 燈具效率 La eficacia de la luminaria	80 Lm/w(2700K), 85 Lm/w(3000K), 90 Lm/w(3500K&4000K), 90 Lm/w(5000K), 90 Lm/w(6500K),
LED Source Luminous Efficacy / LED光源光效 Fuente luminosa LED Eficacia	130 Lm/w(2700K), 140 Lm/w(3000K), 140 Lm/w(4000K), 150 Lm/w(5000K), 150 Lm/w(6500K),
Housing materials-外殼材料Materiales de la carcasa	Die-cast aluminum and PC Lens 壓鑄鋁和PC透鏡
Housing Color外殼顏色: Decoratoin Ring Color 裝飾環顏色:	Matte Black RAL 9005 / Signal White RAL 9003 啞光黑色燈身 RAL 9005 / 白色燈身 RAL9003 Matte Black 黑/ White 白 / Golden 金
Operating Temperature Range / 工作溫度範圍 Rango de temperatura de funcionamiento	-20 °C / +50 °C
Operating Humidity / 工作濕度 Humedad de funcionamiento	0~90%, non-condensing / 不結霜 sin condensación
Ingress Protection / 防護等級 Protección de ingreso	IP20
Comply Testing Standard 符合測試標準 Cumplir el estándar de prueba	ED Luminaires: IEC/EN 60598-1 ; IEC/EN 60598-2-1 ; IEC/ EN62493 ; IEC/EN 62301 ; IEC TR 62778 & IEC 62471 (RG1) LED Driver: EN 55015 / IEC 61000-3-2 / IEC 61347-1 / IEC 61347-2-13 / IEC 61547
Certification-認證-Certificación	    

Project	Fixture#	Date
		Firm



Ordering Information

Choose the option that suits your need and write its corresponding code on the appropriate line to form the product code.


Example product code: [CARNI-11W](#)

CARNI - -
[Power Consumption](#)

Power Consumption	
Code	Description
11W	11W
13W	13W


BEAM ANGLE

DIMON
TECHNOLOGY

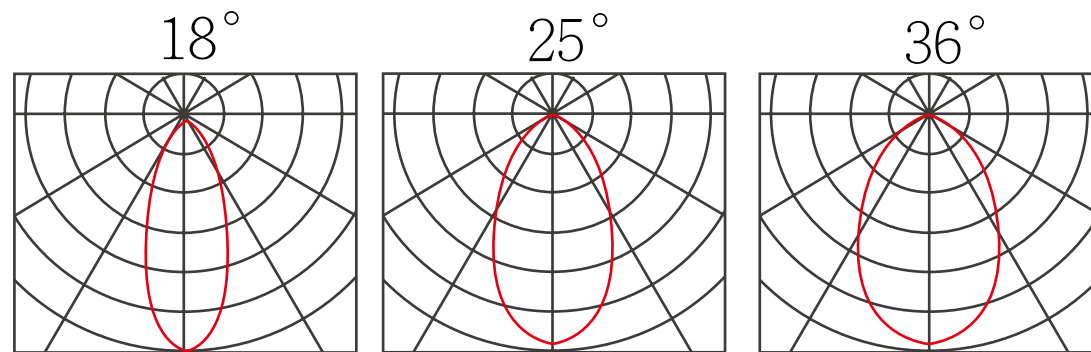

Technical Drawing

DIMON
TECHNOLOGY

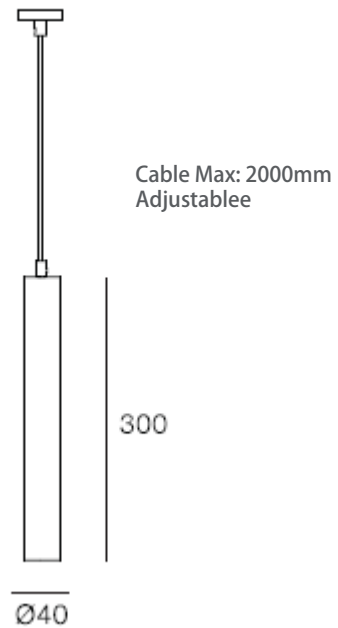

Accessories:

Pendant Box : Dia 160mmx H: 37
for DALI and Other LED Driver
application



Unit: mm