


CHLOE -008

Technical Datasheet



GRC Barrier Bench

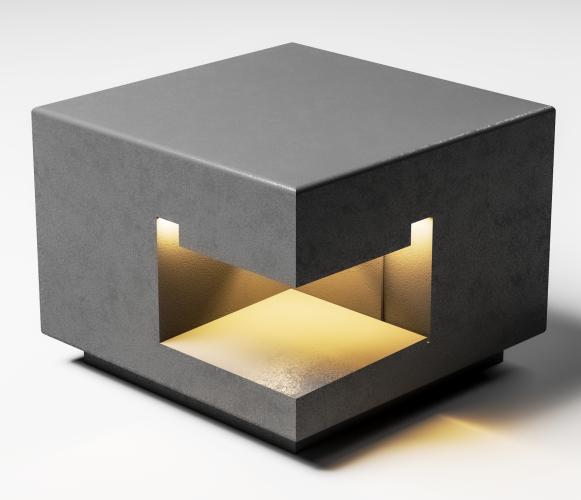

- Materials: GRC Concrete Plinth
- Optional: Integrated IP67 LED Strip Light
- Polished Concrete Surface Finished
- Stainless steel anchoring accessories to floor or wall

CHLOE -008

GRC Barrier Bench



Technical Data

Materials	GRC Concrete Plinth	
Finished	Polished Concrete Surface Finished	
Optional	Integrated IP67 LED Strip Light • Brand Name : DIMON Technology • Series Name: STECORA • 12W/M Input Voltage: DC24 V • W: 12 x H: 5 mm • 240PCS 2835 Low Power LEDs @ 1 Meter Cutting Length: 25 mm • Color Temperature :2700K / 3000K / 4000K / 5000K / 6500K • CRI: >90 Beam Angle: 120° • MacAdam Ellipses Binning : Standard Deviation Colour Matching < 3 SDCM • Luminaire Efficacy: 100 Lm/w(2700K), 100 Lm/w(3000K), 120Lm/w(4000K), 130 Lm/w(5000K), 130 Lm/w(6500K), • Housing materials: Polyurethane (PU) Case and Polyurethane (PU) Glue • Ingress Protection: IP67 • Remote-type LED Driver ON/OFF or Dali dimming or 0-10V Dimming • Comply Testing Standard: IEC 60598-1 / IEC 60598-2-1 / IEC 62471 / IEC 62493 / IEC 62031/TM21 / ROHS/ EN 55015 / IEC 61000-3-2 /IEC 61347-1 /IEC 61347-2-13/IEC 61547	
Installation accessories	Stainless steel anchor	
Dimension	L:600x W 600x H450mm Detail refer to Technical Drawing-GRC Barrier Bench -008	
Certification of LED Strip Light	ZigBee DALI DALD	

Project	Fixture#	Date
		Firm



Ordering Information

Choose the option that suits your need and write its corresponding code on the appropriate line to form the product code.

Example product code:

CHLOE-008 - -


Type


Туре	
Code	Description
А	Type A (with LED Strip Light)
В	Type B stainless steel anchoring to wall
С	Type C stainless steel anchoring to floor

Technical Drawing




Type B

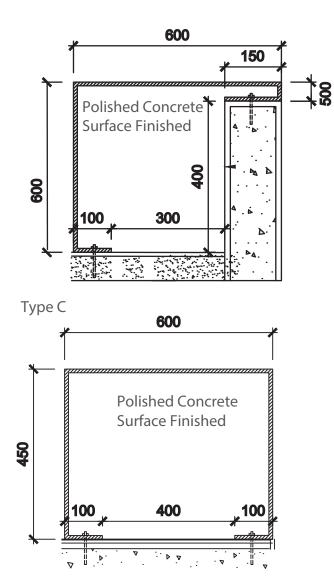

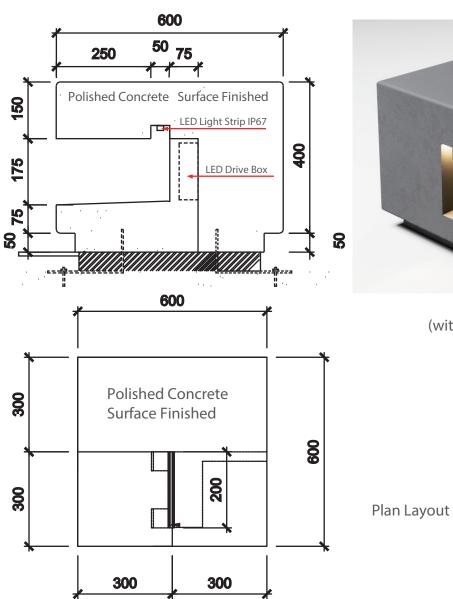

Type A

(with LED Strip Light)



Type A (with LED Strip Light)

