


CHLOE -009



GRC Barrier Bench





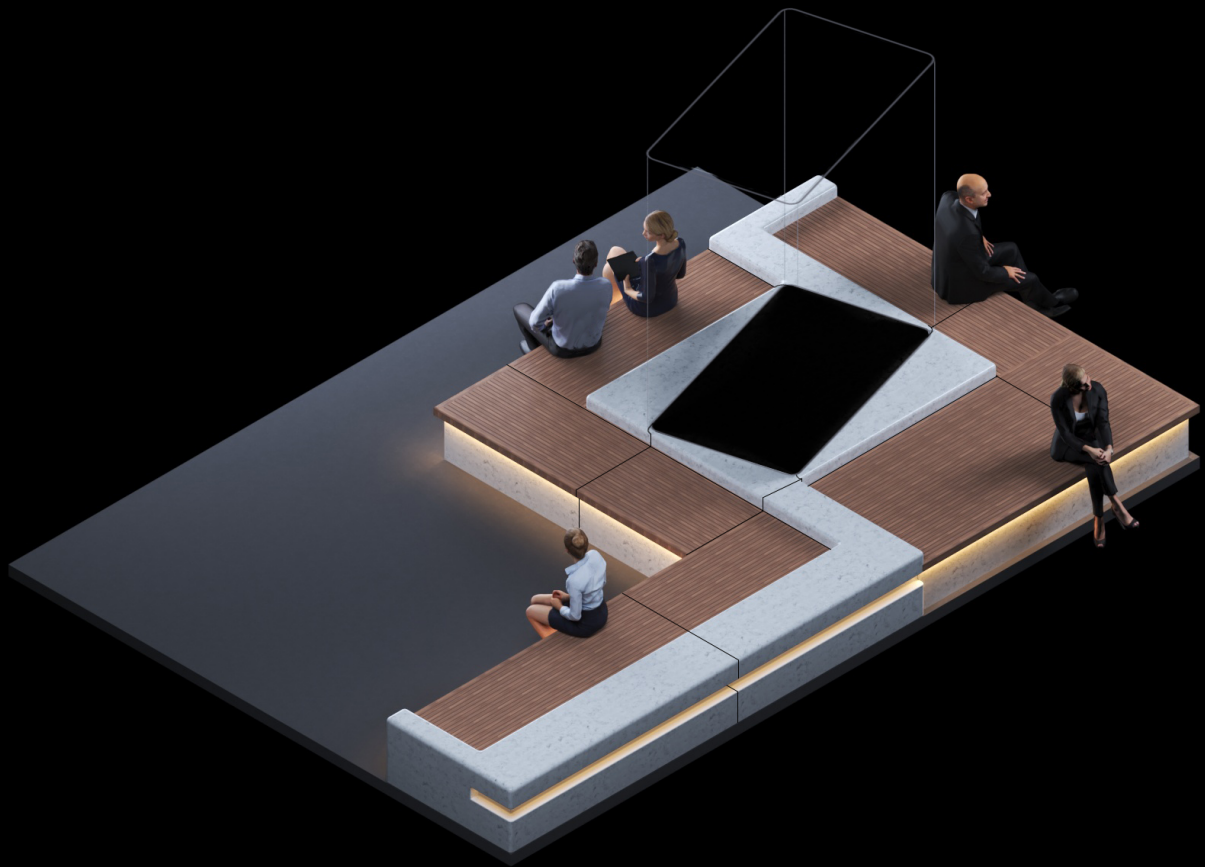



Materials: GRC Concrete Plinth , Autoclave Teak Timber and Painting Steel
Optional: Integrated IP67 LED Strip Light
Polished Concrete Surface Finished
Stainless steel anchoring

CHLOE -009

GRC Barrier Bench

Technical Data

Materials	GRC Concrete Plinth , Autoclave Teak Timber and Painting Steel
Finished	Polished Concrete Surface Finished
Optional	Integrated IP67 LED Strip Light Brand Name : DIMON Technology Series Name: STECOR 12W/M Input Voltage: DC24 V W: 12 x H: 5 mm 240PCS 2835 Low Power LEDs @ 1 Meter Cutting Length: 25 mm Color Temperature :2700K / 3000K / 4000K / 5000K / 6500K CRI: >90 Beam Angle: 120° MacAdam Ellipses Binning : Standard Deviation Colour Matching < 3 SDCM Luminaire Efficacy: 100 Lm/w(2700K), 100 Lm/w(3000K), 120Lm/w(4000K), 130 Lm/w(5000K), 130 Lm/w(6500K), Housing materials: Polyurethane (PU) Case and Polyurethane (PU) Glue Ingress Protection: IP67 Remote-type LED Driver ON/OFF or Dali dimming or 0-10V Dimming Comply Testing Standard: IEC 60598-1 / IEC 60598-2-1/ IEC 62471 / IEC 62493 / IEC 62031/ TM21 / ROHS/ EN 55015 / IEC 61000-3-2 /IEC 61347-1 /IEC 61347-2-13/IEC 61547
Installation accessories	Stainless steel anchor
Dimension	Refer to Technical Drawing
Certification of LED Strip Light	    ZigBee[®]  

Project	Fixture#	Date
		Firm





Ordering Information


Choose the option that suits your need and write its corresponding code on the appropriate line to form the product code.

Example product code:


CHLOE-009 -

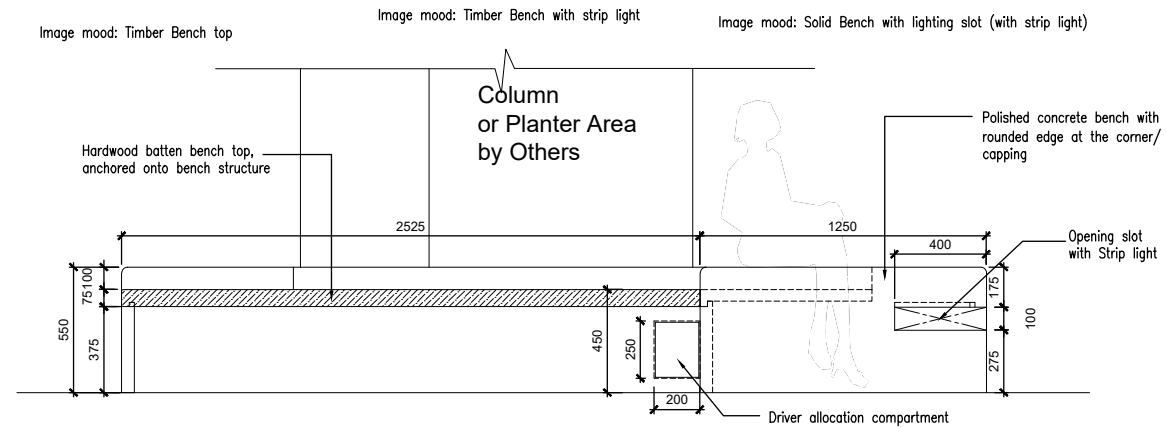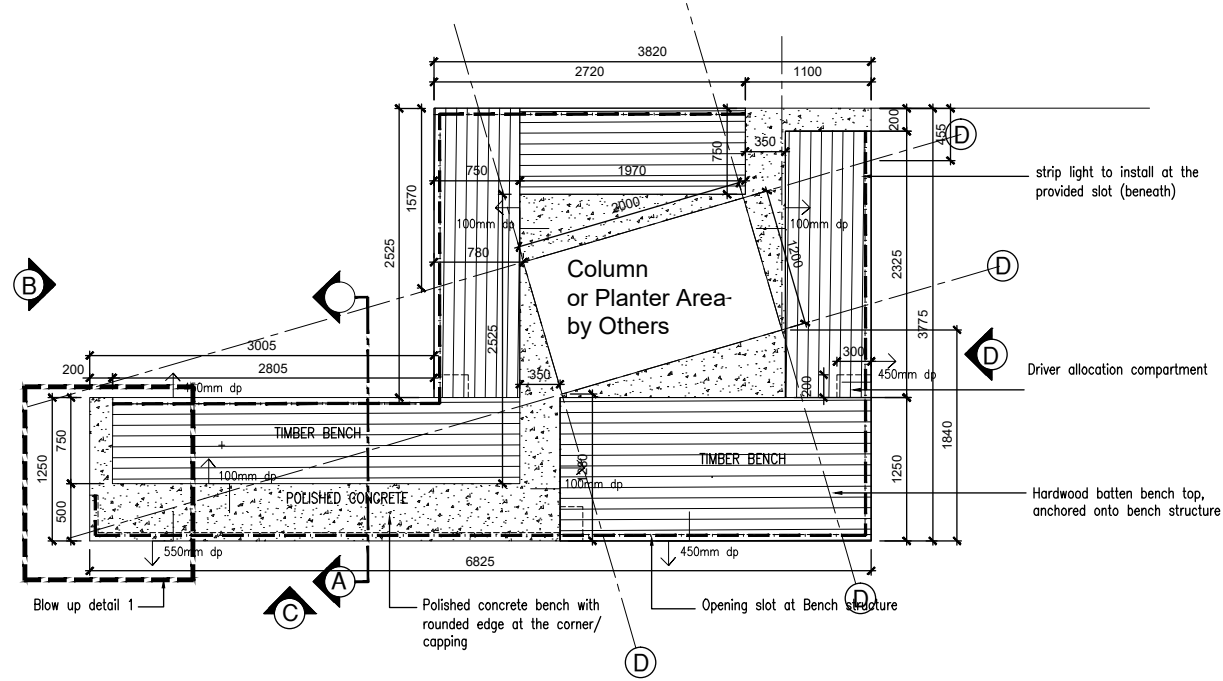


ELEVATION B

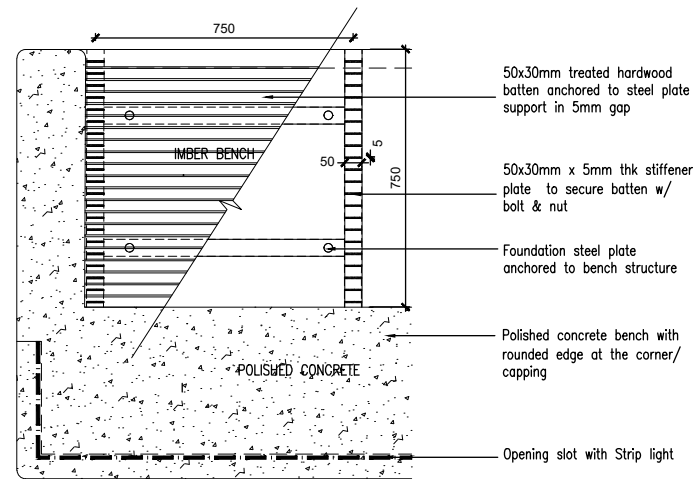


BLOW UP 1- TIMBER BENCH

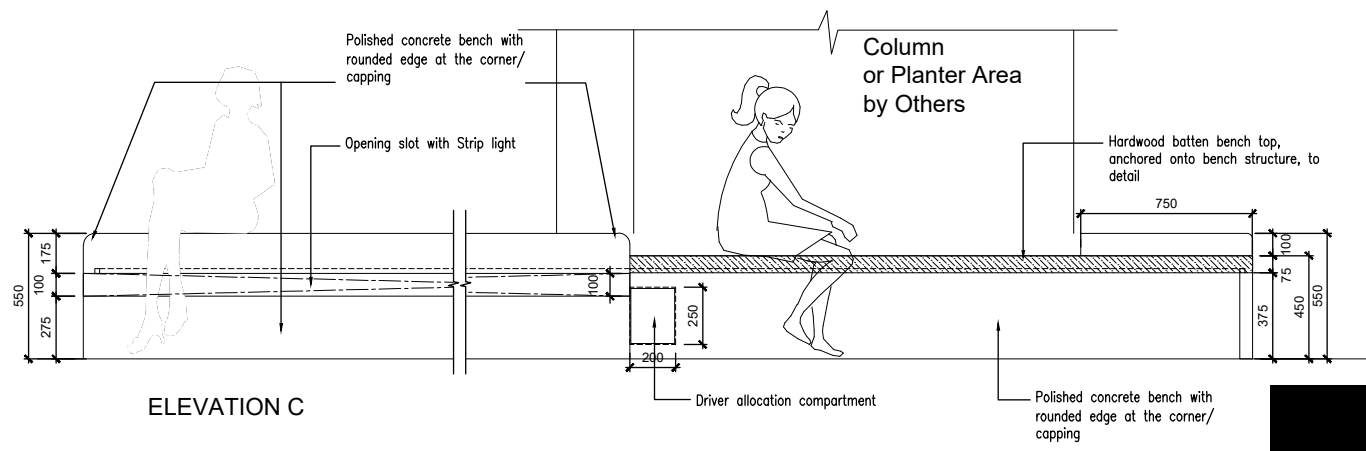

ELEVATION C

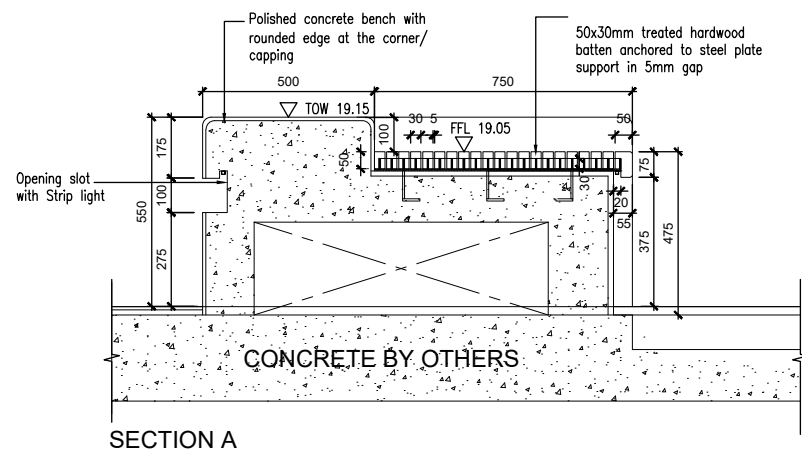

SECTION A

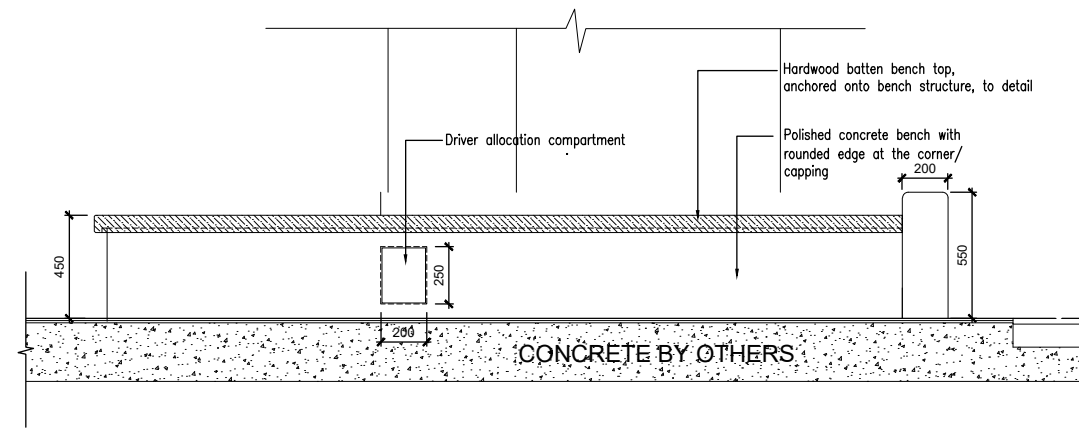

ELEVATION D

