


**CHLOE -018**



CB












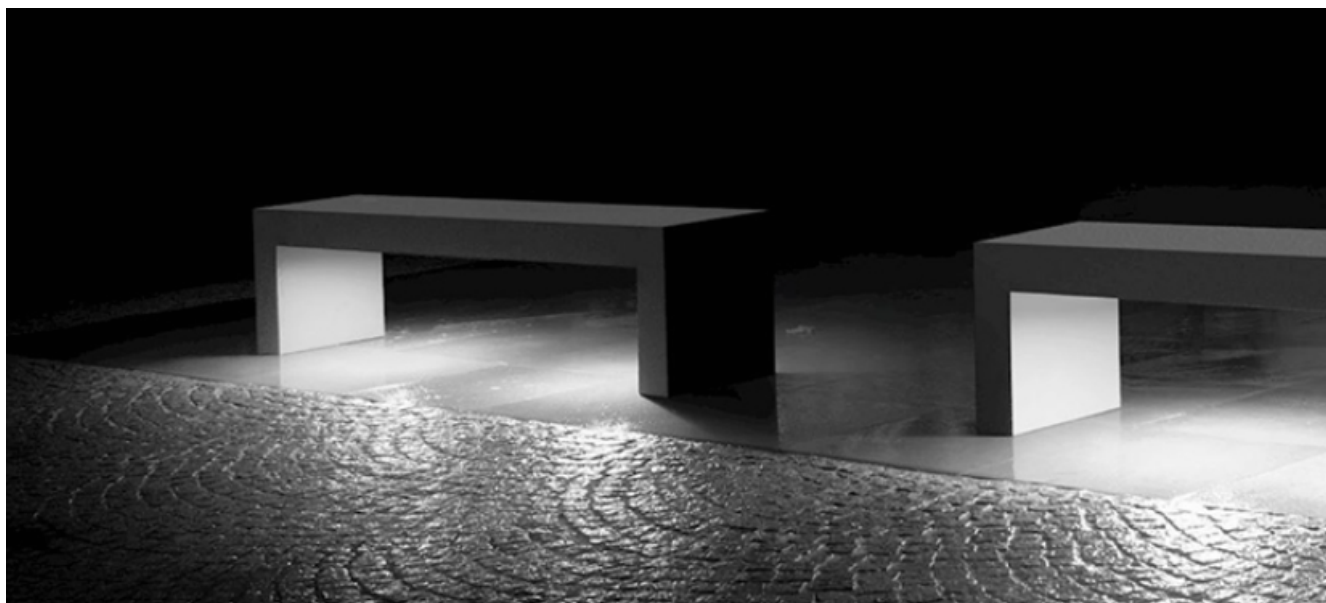
Barrier Bench



- Materials: Autoclave Teak Timber and Stainless-Steel Frame
- Integrated Recessed IP65 IK08 LED Down Light -DRAMA Series
- 2 Mounting plates with elongated holes
- Connection box with cable entries for through-wiring of mains supply cable
- Stainless steel anchoring

## Technical Data

Materials	Autoclave Pine-Brown with Stainless-Steel Frame
Finished	Coating Color : Graphite RAL7024 White RAL 9003 , Grey RAL 9006 or Matte Black RAL 9005
LED Light Specification:	<ul style="list-style-type: none"> <li>• Integrated 2 set IP65 LED Down Light -DRAMA Series</li> <li>• Brand Name : DIMON Technology</li> <li>• Series Name: DRAMA Series</li> <li>• Input Voltage: AC220-240V 50/60HZ</li> <li>• Integrated LED Driver: Power Factor :&gt;0.95 TOTAL HARMONIC DISTORTION: THD&lt; 20%</li> <li>• LED Driver Life : &gt; 50,000</li> <li>• Luminaires Consumption Power: 14W (2 x 7W)</li> <li>• Color Temperature :2700K / 3000K / 4000K / 5000K / 6500K</li> <li>• CRI: &gt;80 Beam Angle: 90°</li> <li>• MacAdam Ellipses Binning : Standard Deviation Colour Matching &lt; 3 SDCM</li> <li>• Photobiological safety-IEC 62471 / of Luminaire: Low Risk Group 1 (RG1)</li> <li>• LED Sources luminous flux: 2400lm@4000K / 2500lm@4000K</li> <li>• Luminaire luminous flux: 1120 Lm/w(3000K), 1260Lm/w(4000K),</li> <li>• Luminaire Efficacy: 80 Lm/w(3000K), 90Lm/w(4000K)</li> <li>• "Lumen Maintenance LM-80 Reported by TM-21"@ 25°C: &gt; 200,000 h (L 80 B 50) ; 100,000 h (L 90 B 50)</li> <li>• Ingress Protection: IP65</li> <li>• Mech impact protection: IK08</li> <li>• Housing materials: Die-cast aluminum Body and Trim with Matt safety glass or Opal Polycarbonate (PC) Diffuser</li> <li>• Testing Standard: IEC 60598-1 / IEC 60598-2-1/ IEC 62471 / IEC 62493 / IEC 62031/ TM21 / ROHS/ EN 55015 / IEC 61000-3-2 /IEC 61347-1 /IEC 61347-2-13/IEC 61547</li> </ul>
Installation accessories	Stainless steel anchor
Weight:	48.0 kg
Bench Maximum Loading	300kg Max
Certification of LED Down Light	        



Project	Fixture#	Date
		Firm

## Ordering Information

Choose the option that suits your need and write its corresponding code on the appropriate line to form the product code.

Example product code:

CHLOE -018

Barrier Bench

Barrier Bench	
Code	Description
CHLOE -018	CHLOE -018



BEAM ANGLE

