

DORO

30W Max IP20

IP20



0-10V

DALI 2




Accessories : Reflector



White

Chrome Black



Dark Specular

Specular



- Surface Mounted LED LINEAR LIGHT
- Adopt high lumen efficiency SMD LED with even light output, aluminum light body providing excellent thermal management.
- LED module: SMD LEDs, CRI>80, LM-80 performance approval >50,000 hours.
- Integrated -Type 0-10V, DALI, and LED constant current control gear.

Technical Data

Luminaire Type-安裝方式
Tipo de luminaria

Surface Mounted Type明裝式燈具Superficie Tipo Montado

Dimension-尺寸-Dimensión	L:84 x W: 35 x H: 70 mm L:269 x W: 35 x H: 70 mm	L:137 x W: 35 x H: 70 mm L:402 x W: 35 x H: 70 mm
Power Consumption Max-燈具功率 Consumo de energía Max	L:84 x W: 35 x H: 70 mm : 6W L:137 x W: 35 x H: 70 mm : 10W L:269 x W: 35 x H: 70 mm : 15W L:402 x W: 35 x H: 70 mm : 24W	20W 30W
Input Voltage-輸入電壓-Voltaje de entrada	AC220-240V 50/60HZ	
Power Factor / 功率因數/Factor de potencia	PF>0.9	
Total Harmonic Distortion/總諧波失/Distorsión armónica total	THD<20%	
LED Driver Type LED驅動款式 Tipo de controlador LED	Integraed -type LED Driver--Refer to LED driver specification 請參閱LED驅動器規格 Consulte la especificación de controlador de LED 1. ON/OFF Switch AC220-240V 50/60HZ 3. 1-10V Dimming Driver AC220-240V 50/60HZ (Except: L: 85mm) 4. Dali Dimming Driver AC220-240V 50/60HZ(Except: L: 85mm)	
Control Protocol-控制協議/Protocolo de Control	1-10V / Dali	
Beam Angle Combination 光束角組合 Combinación de ángulo de haz	15° 24° 45°	
Light Source Brand-光源品牌-Fuente de luz de marca	OSRAM	
"Lumen Maintenance LM-80 Reported by TM-21"	L70 > 54000 hrs	
LED Life-LED壽命-La vida del LED	>60,000 hours	
Color Temperature -色溫 Temperatura del color	2700K / 3000K / 3500K / 4000K / 5000K / 6500K	
Color Rendering Index-顯色指數 Índice de reproducción cromática	> 90	
MacAdam Ellipses Binning 麥克亞當橢圓分級 Mac Adam binning ellipse	Standard Deviation Colour Matching < 3 SDCM標準偏差配色< 3 SDCM Coincidencia de color estándar Desviación < 3 SDCM	
Luminaire Efficacy燈具效率 La eficacia de la luminaria	100 Lm/w(2700K), 100 Lm/w(3000K&3500K),110 Lm/w(4000K), 120 Lm/w(5000K & 6500K)	
LED Source Luminous EfficacyLED光源光效 Fuente luminosa LED Eficacia	130 Lm/w(2700K), 130 Lm/w(3000K&3500K),140 Lm/w(4000K), 150 Lm/w(5000K & 6500K)	
Housing materials-外殼材料-Materiales de la carcasa	Die-casted Aluminium and Polycarbonate Reflector or Die-casted Aluminium and Polycarbonate Lens 壓鑄鋁和PC反射器 或壓鑄鋁和PC透鏡	
Housing Color-外殼顏色-color de la carcasa	Matte White / Matte black 啞光白色 / 啞光黑色 Blanco mate / Matte black	
Reflector Color 反光板顏色Color del reflector	Chrom Black/ Matte White / Matte black/ Matte silver 鉻黑/ 啞白色 / 啞黑色 /啞銀色 Blanco mate / Matte black	
Ingress Protection-防護等級 Protección de ingreso	IP20	
Operating Humidity -工作濕度 Humedad de funcionamiento	0~90%, non-condensing-不結霜 sin condensación	
Operating Temperature Range / 工作溫度範圍 Rango de temperatura de funcionamiento	-30 °C / +50 °C	
Comply Testing Standard 符合測試標準 Cumplir el estándar de prueba	LED Luminaries: IEC 60598-1; IEC 60598-2-1;IEC62471;IEC 62031; IEC62493 ; IEC 62471 EMC: EN55015 ; IEC/EN 61000-3-2; IEC/EN 61000-3-3;IEC/EN61574 ; RoHS LED Driver: IEC/EN 61347-1; IEC/EN 61347-2-13; IEC/EN 62384; IEC/EN 61000-3-2; IEC/EN 61000-3-3;IEC/EN61574;EN 55015 ; IEC /EN 62384	
Certification-認證-Certificación	  	

Project	Fixture#	Date
		Firm


Ordering Information

Choose the option that suits your need and write its corresponding code on the appropriate line to form the product code.

Example product code: [DORA20W](#)


DORO - - _____
Power Consumption

Power Consumption	
Code	Description
6W	6W@L:84 x W: 35 x H: 70 mm
10W	10W@L:137 x W: 35 x H: 70 mm
15W	15W @L:269 x W: 35 x H: 70 mm
20W	20W @L:269 x W: 35 x H: 70 mm
24W	24W @ L:402 x W: 35 x H: 70 mm
30W	30W @ L:402 x W: 35 x H: 70 mm

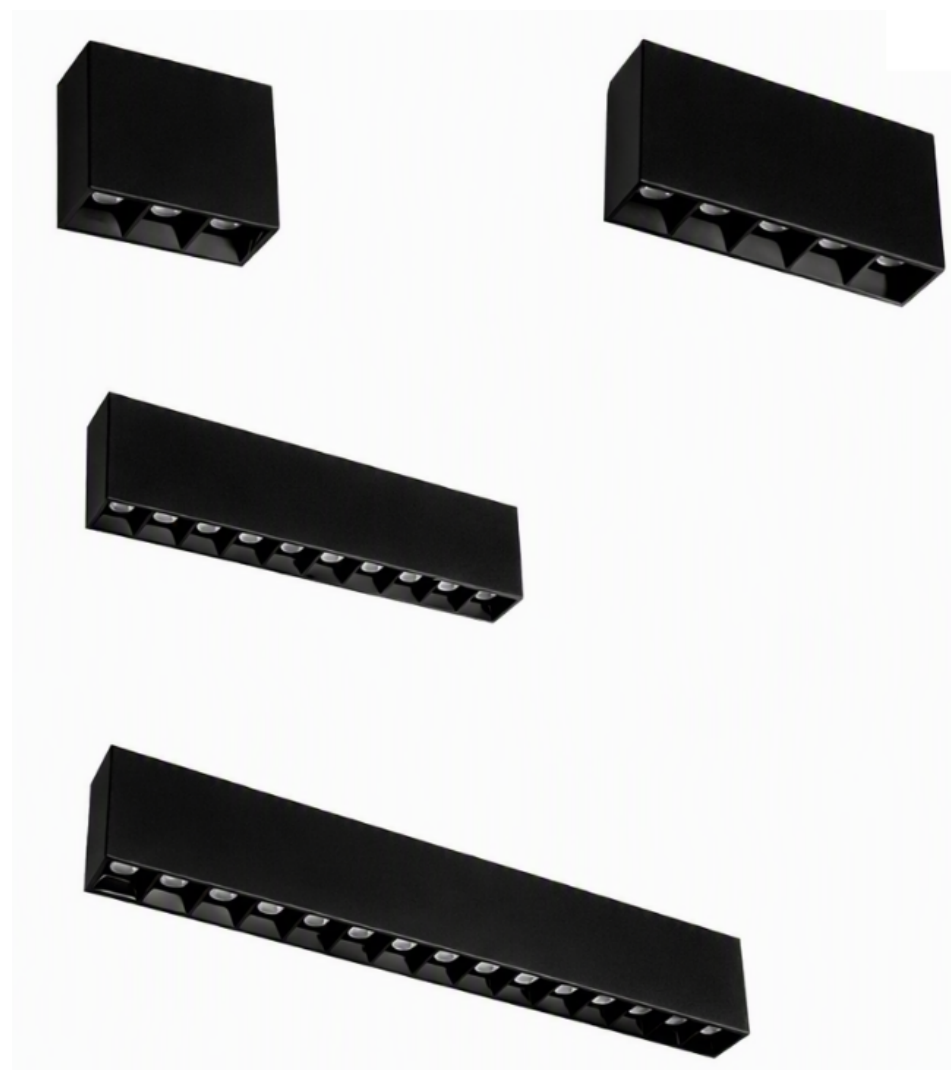



BEAM ANGLE

DIMON
TECHNOLOGY

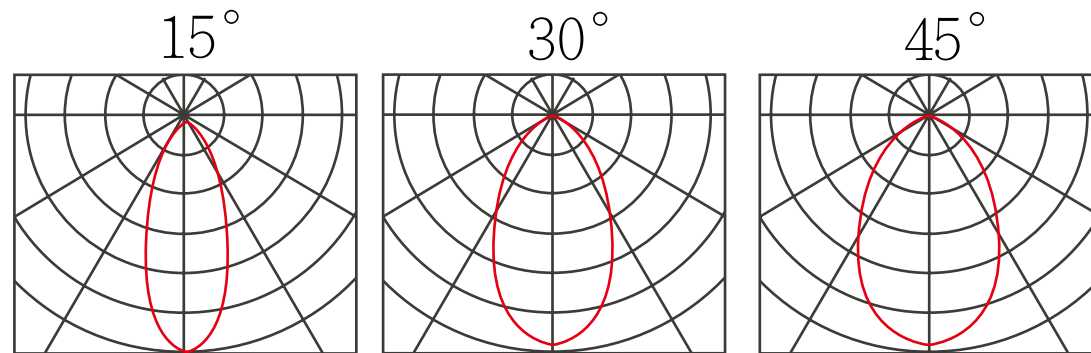

Technical Drawing

DIMON
TECHNOLOGY

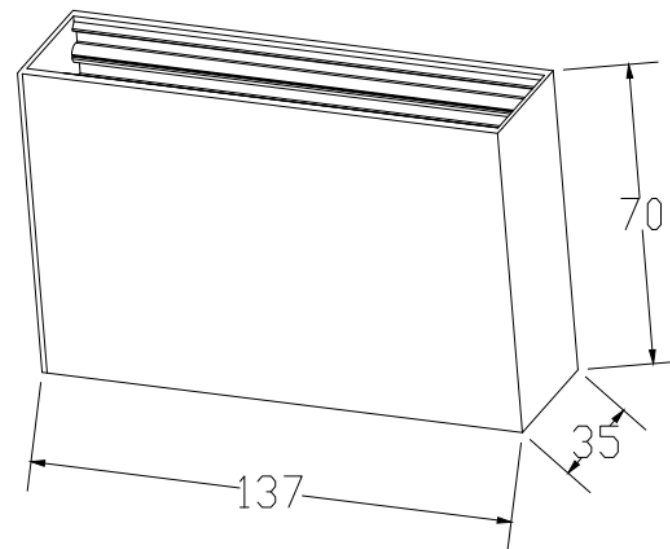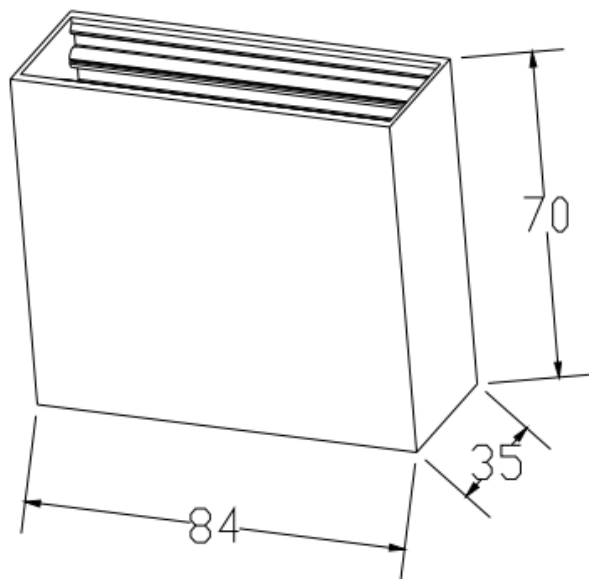

Unit: mm

Technical Drawing

