








DRAYAR-O

Dia 200mm and Dia 400mm



- Housing finished : Die-cast aluminium base with vandal resistant Opal Polycarbonate diffuser which is self-extinguishing fire properties.
- Corrosion -resistance powder coating
- Ingress Protection: IP65 and Mech impact protection: IK10
- Optional Integrated LED Driver : 0-10V, DMX and DALI.

Technical Data

Luminaire Type-安裝方式-Tipo de luminaria	Ceiling or Wall Mount Type吸頂或吸壁安裝Tipo mount en el techo
Dimension-尺寸-Dimensión	• Dia 200 x H:80mm • Dia 400 x H: 80mm
Power Consumption Max-燈具功率Consumo de energía Max	• Dia 200mm : 12W 15W 18W 20W • Dia 200mm : 25W 30W 35W 40W
Input Voltage-輸入電壓-Voltaje de entrada	AC220V-240V 50/60Hz
LED Driver Type LED驅動款式 Tipo de controlador LED	Integrated-type LED Driver--Refer to LED driver specification 請參閱LED驅動器規格 Consulte la especificación de controlador de LED 1. ON/OFF Switch 2. 1-10V Dimming Driver 3. Dali Dimming Driver 4. Emergency Backup >2 hours or >3 hours @ < 12charger hours應急電池/Copia de seguridad de emergencia
LED Driver Features驅動特性 Funciones del controlador de LED	POWER FACTOR : PF>0.90 or PF>0.95 TOTAL HARMONIC DISTORTION: THD< 20% Refer to LED driver specification 請參閱LED驅動器規格Consulte la especificación de controlador de LED
Control Protocol-控制協議 Protocolo de Control	1-10V / Dali
Beam Angle光束角ángulo de haz	120°
Light Source Brand-光源品牌-Fuente de luz de marca	SMD LED
"Lumen Maintenance LM-80 Reported by TM-21"@25 °C	L70 > 45,000 hrs
LED Life-LED壽命-La vida del LED	>60,000 hours
Color Temperature -色溫Temperatura del color	2700K / 3000K / 4000K / 5000K / 6000K
Color Rendering Index-顯色指數 Índice de reproducción cromática	• > 80 • > 90
MacAdam Ellipses Binning 麥克亞當橢圓分級 Mac Adam binning ellipse	Standard Deviation Colour Matching < 3 SCDM 標準偏差配色 < 3 SCDM Coincidencia de color estándar Desviación
Luminaire Efficacy燈具效率 La eficacia de la luminaria	90Lm/w(2700K), 90 Lm/w(3000K), 100 Lm/w(4000K), 110Lm/w(5000K), 110 Lm/w(6500K),
LED Source Luminous EfficacyLED光源光效 Fuente luminosa LED Eficacia	130Lm/w(2700K), 140 Lm/w(3000K), 150 Lm/w(4000K), 150Lm/w(5000K), 150 Lm/w(6500K),
Housing materials-外殼材料 Materiales de la carcasa	Die-cast aluminium and Anti UV Polycarbonate OPA diffuser 壓鑄鋁和抗紫外線PC 乳白擴散器 Difusor OPA de Aluminio inyectado y Policarbonato Anti UV
Housing Color外殼顏色color de la carcasa	Sand White RAL 9003 / Sand Black RAL 9005 / Sand Gray RAL9006 砂白RAL 9003 / 砂黑 RAL 9005 / 砂灰色 RAL9006 Blanco arena RAL 9003 / Negro arena RAL 9005 / Gris arena RAL9006
Ingress Protection-防護等級 Protección de ingreso	IP65
Mech impact protection 機械衝擊保護 Protección contra impactos mecánicos	IK10
Operating Temperature Range / 工作溫度範圍 Rango de temperatura de funcionamiento	-30 °C / +50 °C
Operating Humidity -工作濕度 Humedad de funcionamiento	0~90%, non-condensing-不結霜 sin condensación
Comply Testing Standard 符合測試標準 Cumplir el estándar de prueba	LED Luminaries: LVD: IEC/EN 60598-1;EN / IEC/EN 60598-2-1;IEC62471;IEC/EN 62031; IEC/EN 62493 ; IEC/EN 62471 • LED Driver: IEC/EN 61347-1; IEC/EN 61347-2-13; IEC/EN 62384; IEC/EN 61000-3-2; • IEC/EN 61000-3-3;IEC/EN61574;EN 55015 ; IEC /EN 62384
Certification-認證-Certificación	     

Project	Fixture#	Date
		Firm



Ordering Information


Choose the option that suits your need and write its corresponding code on the appropriate line to form the product code.

Example product code: [DARYAR-12W](#)






DRAYAR - - _____
 Power Consumption

Power Consumption	
Code	Description
12W	12W @ Dia 200mm
15W	15W Dia 200mm
20W	20W Dia 200mm
25W	25W Dia 400mm
30W	30W Dia 400mm
35W	35W Dia 400mm
40W	40W Dia 400mm

Beam Angle

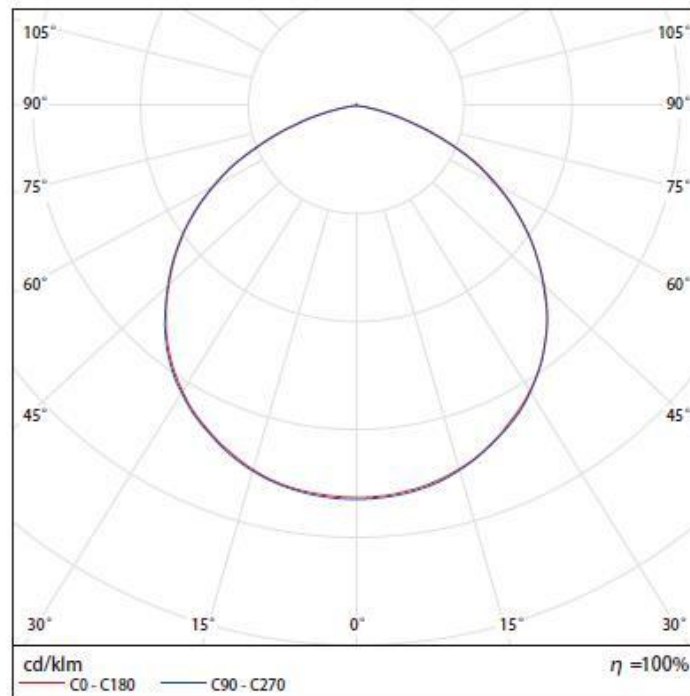

Technical Drawing

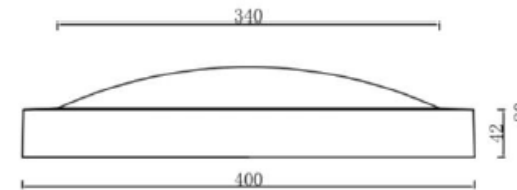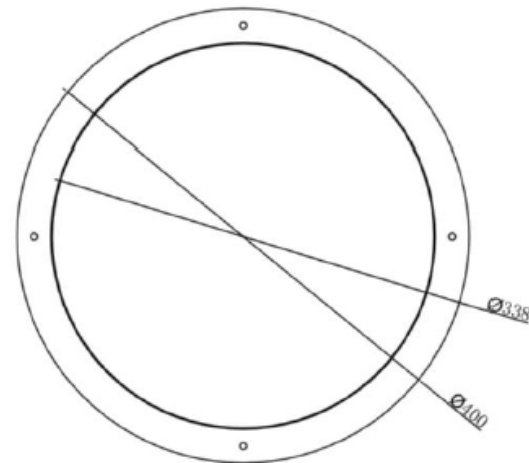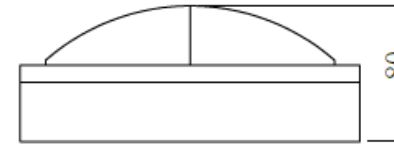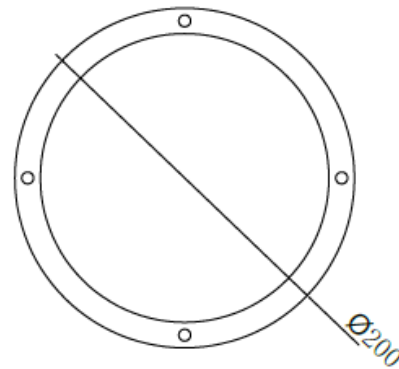

Installation Menu

