



DRIGA-X

7W



- Die-cast aluminium. separate electric housing with super white Clear PC
- Surface anti-ageing electrostatic spray processing,super resistance to corrosion.
- Wall mounting, easy installation with removable back plate.
- Silicon rubber gasket
- IP65, IK08,

Technical Data

Luminaire Type-安裝方式Tipo de luminaria	Wall Mounted Type壁掛式 Tipo montado en la pared		
Dimension-尺寸-Dimensión	• Down Light Type : W: 125 x H: 125 x D: 63mm • Up and Down Light Type : W: 109 x H: 173 x D: 63mm		
Power Consumption Max-燈具功率 Consumo de energía Max	7W		
Input Voltage-輸入電壓-Voltaje de entrada	AC220-240V 50/60HZ		
LED Driver Type LED驅動款式 Tipo de controlador LED	Integrated-type LED Driver--Refer to LED driver specification 請參閱LED驅動器規格 Consulte la especificación de controlador de LED 1. ON/OFF Switch AC220-240V 50/60HZ		
LED Driver Features驅動特性 Funciones del controlador de LED	POWER FACTOR : PF≥0.90 @ Full Load TOTAL HARMONIC DISTORTION: THD< 20%		
Light Source Brand-光源品牌-Fuente de luz de marca	CREE		
Beam Angle光束角ángulo de haz	• Down Light Type : 108° • Up and Down Light Type : 15°/78°		
"Lumen Maintenance LM-80 Reported by TM-21"@25degree	L70(10k) > 63,500 hrs		
LED Life-LED壽命-La vida del LED	>60,000 hours		
Color Temperature -色溫 Temperatura del color	2700K / 3000K / 4000K/ 5000K / 6500K		
Color Rendering Index-顯色指數 Índice de reproducción cromática	> 80		
MacAdam Ellipses Binning 麥克亞當橢圓分級 Mac Adam binning elipse	Standard Deviation Colour Matching < 3 SCDM 標準偏差配色< 3 SCDM Coincidencia de color estándar Desviación		
Luminaire Efficacy燈具效率 La eficacia de la luminaria	80lm/w(2700K), 100lm/w(5000K),	80lm/w(3000K), 100lm/w(6500K)	90lm/w(4000K),
LED Source Luminous EfficacyLED光源光效 Fuente luminosa LED Eficacia	130lm/w(2700K), 150lm/w(5000K),	130lm/w(3000K), 150lm/w(6500K)	140m/w(4000K),
Housing materials-外殼材料 Materiales de la carcasa	Die-cast aluminum and Clear Polycarbonate and Silicon rubber gasket 壓鑄鋁和透明PC 罩和矽橡膠墊圈 Aluminio fundido a presión y policarbonato transparente y junta de caucho de silicona		
Housing Color外殼顏色 color de la carcasa	Polyester powders Coating--Matte Black RAL9005 / Grey RAL9006 / Matte White RAL9003 聚酯粉末塗料—啞光黑 RAL 9005 / 灰色 RAL 9006 / 啞光白 RAL 9003 Revestimiento en polvo de poliéster: negro mate RAL 9005 / gris RAL 9006 / blanco mate RAL 9003		
Ingress Protection-防護等級 Protección de ingreso	IP65		
Mech impact protection 機械衝擊保護 Protección contra impactos mecánicos	IK08		
Operating Temperature Range / 工作溫度範圍 Rango de temperatura de funcionamiento	-30 °C / +50 °C		
Operating Humidity -工作濕度 Humedad de funcionamiento	0~90%, non-condensing-不結霜 sin condensación		
Certification-認證-Certificación	     		

Project	Fixture#	Date
		Firm

Ordering Information

Choose the option that suits your need and write its corresponding code on the appropriate line to form the product code.

Example product code: [DRIGA-7W](#)

DRIGA



7W

Power Consumption



Power Consumption	
Code	Description
7W	7W



BEAM ANGLE

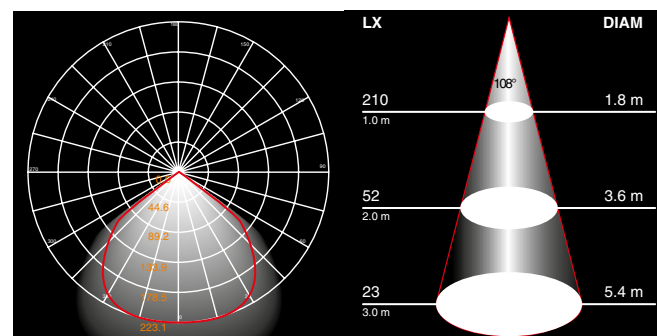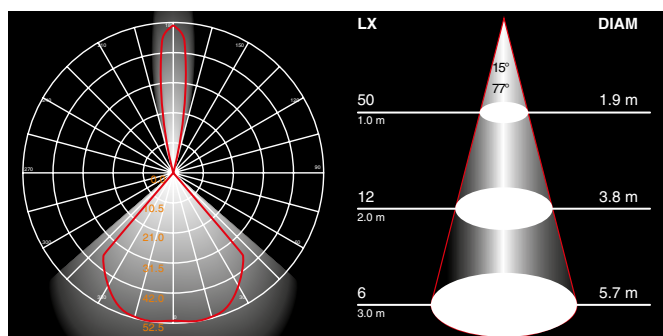

Technical Drawing

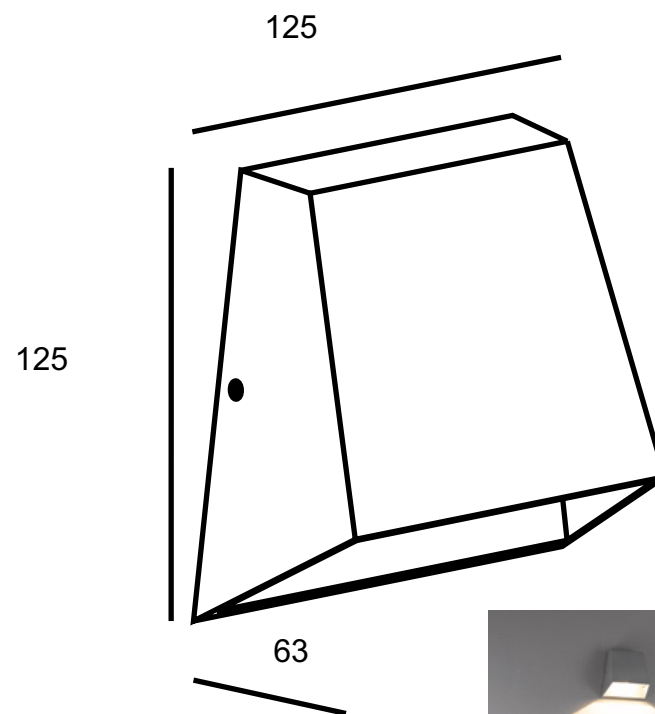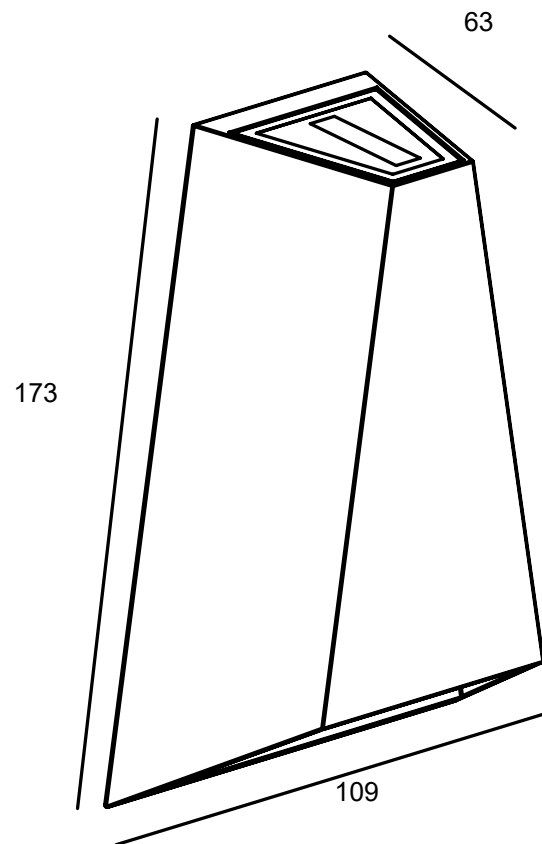

Unit: mm