

DRIKE

D40&D50&D52mm 4.5W Max IP20



Type A



Type E



Type B



Type F



Type C



Type G



Type D



Type H



LED SPOT LIGHT. Housing: die-cast aluminium, powder-coated, designed as heatsink. Anti-glare reflector and diffusor system made of PMMA. LED module: LUMILEDS SMD, CRI>80, LM-80 performance approval >50,000 hours. Integrated-Type ELV, 0-10V, DALI, DMX and RDM LED constant current control gear.

Technical Data

Luminaire Type- 安裝方式 Tipo de luminaria	Recessed Mount Type 嵌入式筒燈 Empotrada Tipo Mount	
Dimension-尺寸-Dimensión	• Dia: 40 x H: 49 mm @ Type A • Dia: 40 x H: 51 mm @ Type C • Dia: 52 x H: 38 mm @ Type E • SQ: 52 x H: 38 mm @ Type G	- Dia: 40 x H: 38 mm @ Type B - Dia: 50 x H: 42 mm @ Type D - Dia: 52 x H: 50 mm @ Type F - SQ: 50 x H: 50 mm @ Type H
Cut off Dimension-開孔尺寸-Cortar Dimensión	• Dia 35mm @ Dia: 40 x H: 49 mm @ Type A • Dia 35mm @ Dia: 40 x H: 51 mm @ Type C • Dia 45mm @ Dia: 52 x H: 38 mm @ Type E • Dia 45mm @ SQ: 52 x H: 38 mm @ Type G	- Dia 35mm @ Dia: 40 x H: 38 mm @ Type B - Dia 45mm @ Dia: 50 x H: 42 mm @ Type D - Dia 45mm @ Dia: 52 x H: 50 mm @ Type F - Dia 45mm @ SQ: 50 x H: 50 mm @ Type H
QTY of LEDs-燈珠數量-CANT de LEDs	1 pcs CREE COB	
Input Voltage-輸入電壓-Voltaje de entrada	AC220-240V 50/60HZ (with remote driver)	
Power Consumption Max-燈具功率 Consumo de energia Max	• 2W 3W 4.5W	
LED Driver Type LED驅動款式 Tipo de controlador LED	Remote-type LED Driver--Refer to LED driver specification 請參閱LED驅動器規格 Consulte la especificación de controlador de LED 1. ON/OFF Switch AC220-240V 50/60HZ 2. ELV Dimming Driver (5-100%) AC 100-120V 50/60Hz or AC 200-240V 50/60HZ 3. 0-10V Dimming Driver AC100-240V 50/60HZ 4. Dali Dimming Driver AC100-240V 50/60HZ 5. DMX Driver AC100-240V 50/60HZ 6. RDM Driver AC100-240V 50/60HZ 7. Emergency Backup >2 hours or >3 hours @ < 24 charger hours應急電池/Copia de seguridad de emergencia	
Control Protocol-控制協議 Protocolo de Control	0-10V / Dali / DMX 512 / RDM / ZIGBEE Wireless Control	
Beam Angle 光束角 ángulo de haz	• 12° 15° 24° @ Type A & Type D • 20° 38° 60° @ Type B & Type C & Type E & Type F & Type G & Type H	
Light Source Brand-光源品牌-Fuente de luz de marca	CREE - (Photobiological safety-IEC 62471 'Risk Group 1' (low risk))	
"Lumen Maintenance LM-80 Reported by TM-21"	1. L90(10k) = 50,700 hrs 2. L80(10k) > 63,500 hrs 3. L70(10k) > 63,500 hrs	
LED Life-LED壽命-La vida del LED	>60,000 hours	
Color Temperature -色溫 Temperatura del color	2700K / 3000K / 4000K / 5000K / 6500K	
Color Rendering Index-顯色指數 Índice de reproducción cromática	• > 80 • > 90	
MacAdam Ellipses Binning 麥克亞當橢圓分級 Mac Adam binning ellipse	Standard Deviation Colour Matching < 3 SDCM 標準偏差配色 < 3 SDCM Coincidencia de color estándar Desviación < 3 SDCM	
Luminaire Efficacy 燈具效率 La eficacia de la luminaria	• 60 Lm/w(2700K), • 60 Lm/w(3000K), • 65 Lm/w(4000K), • 70 Lm/w(5000K), • 70 Lm/w(6500K),	
LED Source Luminous Efficacy LED光源光效 Fuente luminosa LED Eficacia	• 90 Lm/w(2700K), • 90 Lm/w(3000K), • 95 Lm/w(4000K), • 100 Lm/w(5000K), • 100 Lm/w(6500K),	
Housing materials-外殼材料 Materiales de la carcasa	Die-cast aluminum and acrylic 壓鑄鋁和亞克力 Fundición de aluminio y acrílico	
Housing Color 外殼顏色 color de la carcasa	Matte white / Matte black 啞光白色 / 啞光黑色 Blanco mate / Matte black	
Reflector Color-反光杯顏色-Reflector color	Matte white / Matte black 啞光白色 / 啞光黑色 Blanco mate / Matte black	
Ingress Protection-防護等級 Protección de ingreso	IP20 - (IEC 60529)	
Environment-使用環境-medio ambiente	Indoor	
Operating Humidity -工作濕度 Humedad de funcionamiento	0~90%, non-condensing-不結霜 sin condensación	
Operating Temperature Range / 工作溫度範圍 Rango de temperatura de funcion amiento	-30 °C / +50 °C	
Comply Testing Standard 符合測試標準 Cumplir el estándar de prueba	LED Luminaires: IEC 60598-1 / IEC 60598-2-2 / Hot Wire Testing: 850°C LED Driver: EN 55015 / IEC 61000-3-2 / IEC 61347-1 / IEC 61347-2-13 / IEC 61547	
Certification-認證-Certificación	     	

Project	Fixture#	Date
		Firm



Ordering Information

Choose the option that suits your need and write its corresponding code on the appropriate line to form the product code.


Example product code: [DRIKE-3W](#)

DRIKE - -
[Power Consumption](#)


Power Consumption	
Code	Description
2W	1x2W
3W	1x3W
4.5W	1x4.5W

BEAM ANGLE


12°

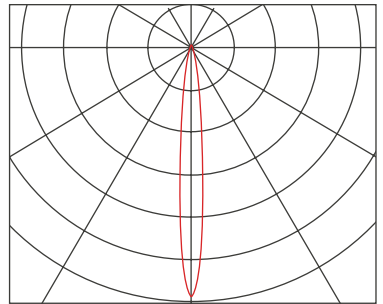

15°

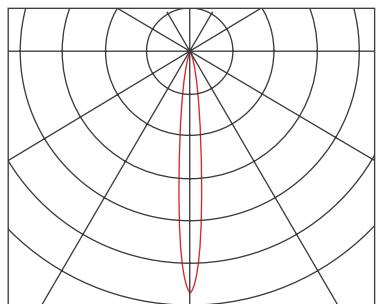


24°

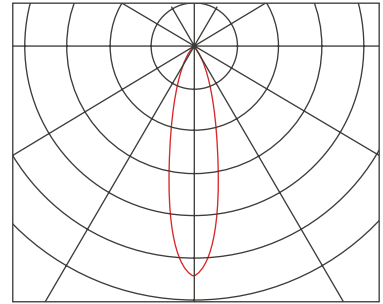


Type A & Type D


20°

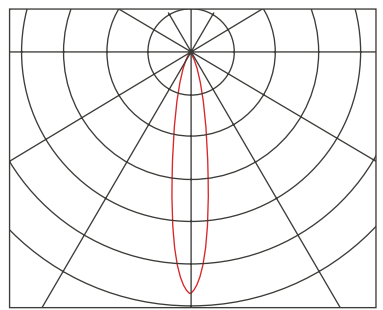

38°

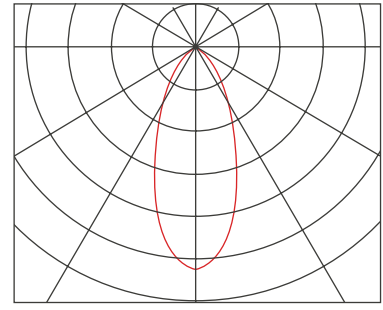

60°

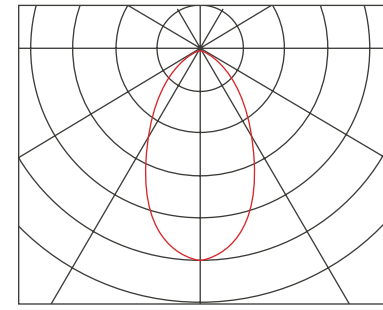

Type B & Type C & Type E
Type F & Type G & Type H

Technical Drawing

Type A



Type B




Type C



Type D



Type E

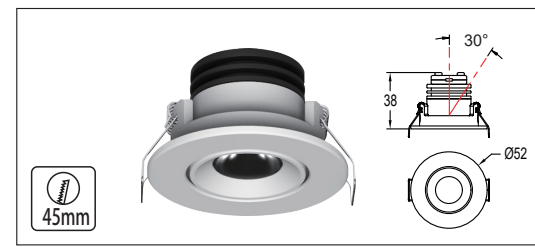


Type F



Type G



Type H

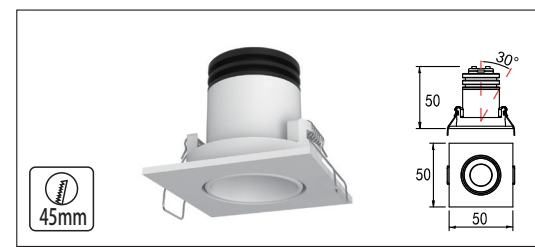

Unit: mm