










## DRIWOD

Dia 90mm and Dia 110mm Max 25W IP65



- Housing: die-cast aluminium, powder-coated with anti-glare Spread Glass diffusor
- UV resistant and corrosion-resistance powder coating
- Anti-glare and high purity anodized reflector with silicon gasket for Ingress Protection: IP65
- LED module: high-power CREE LEDs Array, CRI>90,

## Technical Data

Luminaire Type- 安裝方式-Tipo de luminaria	Recessed Mount Type 嵌入式筒燈 Empotrada Tipo Mount	
Dimension-尺寸-Dimensión	Dia 90 x H: 90mm	Dia 110 x H: 110mm
Cut off Dimension-開孔尺寸-Cortar Dimensión	Dia 75 mm @ Dia 90 x H: 90mm	Dia 95mm@Dia 110 x H: 110mm
Input Voltage-輸入電壓-Voltaje de entrada	AC220-240V 50/60HZ	
Power Consumption Max-燈具功率 Consumo de energía Max	Dia 90mm: 7W 9W 11W Dia 110mm: 12W 15W 20W 25W	
LED Driver Type LED驅動款式 Tipo de controlador LED	Remote-type LED Driver--Refer to LED driver specification 請參閱LED驅動器規格 Consulte la especificación de controlador de LED 1. ON/OFF Switch AC220-240V 50/60HZ 2. 1-10V Dimming Driver AC220-240V 50/60HZ 3. Dali Dimming 1-100% Driver AC220-240V 50/60HZ 7. Emergency Backup >2 hours or >3 hours @ < 24 charger hours 應急電池/Copia de seguridad de emergencia	
LED Driver Features 驅動特性 Funciones del controlador de LED	POWER FACTOR : PF>0.95 TOTAL HARMONIC DISTORTION: THD< 20% Refer to LED Driver data sheet	
Control Protocol-控制協議 Protocolo de Control	1-10V / Dali / Dali 2	
Beam Angle 光束角 ángulo de haz	24° 38°	
Light Source Brand-光源品牌-Fuente de luz de marca	CREE	
"Lumen Maintenance LM-80 Reported by TM-21"@ 25°C	L80 > 50,000 hrs	L70 > 60,000 hrs
LED Life-LED壽命-La vida del LED	>60,000 hours	
Color Temperature -色溫 Temperatura del color	3000K / 4000K / 5000K	
Color Rendering Index-顯色指數 Índice de reproducción cromática	>80 >90	
Chromaticity Tolerance (initial Macadam) 色度容差 (初始Macadam) Tolerancia de cromaticidad (Macadam inicial)	Standard Deviation Colour Matching < 3 SDCM 標準偏差配色 < 3 SDCM Coincidencia de color estándar Desviación < 3 SDCM	
Luminaire Efficacy 燈具效率 La eficacia de la luminaria	Clear Glass diffuser : 90 Lm/w(3000K), 100 Lm/w(4000K), 110 Lm/w(5000K), Spread Glass diffuser : 70 Lm/w(3000K), 80 Lm/w(4000K), 90Lm/w(5000K),	
LED Source Luminous Efficacy LED光源光效 Fuente luminosa LED Eficacia	130 Lm/w(3000K) 135 Lm/w(4000K), 140 Lm/w(5000K),	
Housing materials-外殼材料 Materiales de la carcasa	Die-cast aluminum & Polycarbonate reflector & Spread Tempered glass or Clear Tempered glass 壓鑄鋁和PC反射器和鋼化玻璃擴散罩或透明鋼化玻璃 Aluminio fundido a presión y reflector de policarbonato y vidrio templado extendido o vidrio templado transparente	
Trim Color 框邊顏色 color de corte	Powder Coating :Matte Balck or Matte White 粉末塗料：啞光黑或啞光白 Recubrimiento en polvo: negro mate o blanco mate	
Ingress Protection-防護等級 Protección de ingreso	IP65	
Mech impact protection機械衝擊保護 Protección contra impactos mecánicos	IK07	
Operating Humidity -工作濕度 Humedad de funcionamiento	0~90%, non-condensing-不結霜 sin condensación	
Operating Temperature Range / 工作溫度範圍 Rango de temperatura de funcionamiento	-30 °C / +50 °C	
Comply Testing Standard 符合測試標準 Cumplir el estándar de prueba	LED Luminaires: IEC/EN 60598-1 ; IEC/EN 60598-2-2 ; IEC/ EN62493 ; IEC/EN 62301 ; IEC TR 62778 & IEC 62471 (RG1) ;ROHS LED Driver: EN 55015 / IEC 61000-3-2 / IEC 61347-1 / IEC 61347-2-13 / IEC 61547 /IEC 62384	
Certification-認證-Certificación	        	

Project	Fixture#	Date
		Firm

## Ordering Information

Choose the option that suits your need and write its corresponding code on the appropriate line to form the product code.

Example product code: [DRIWOD-11W](#)

DRIWOD - - \_\_\_\_\_  
Power Consumption

Power Consumption	
Code	Description
<a href="#">7W</a>	7W@Dia 90mm
<a href="#">9W</a>	9W@Dia 90mm
<a href="#">11W</a>	11W@Dia 90mm
<a href="#">12W</a>	12W@Dia 110mm
<a href="#">15W</a>	15W@Dia 110mm
<a href="#">20W</a>	20W@Dia 110mm
<a href="#">25W</a>	25W@Dia 110mm


### Accessories





### Spread Tempered Glass

# BEAM ANGLE



24°

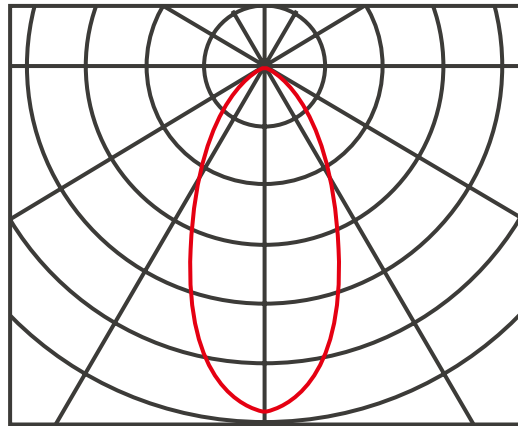

38°

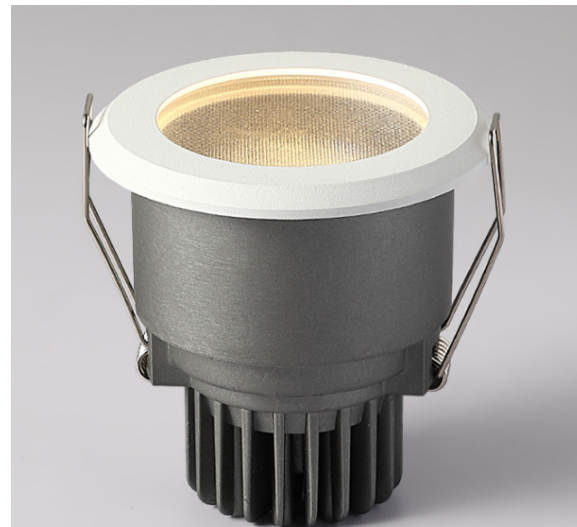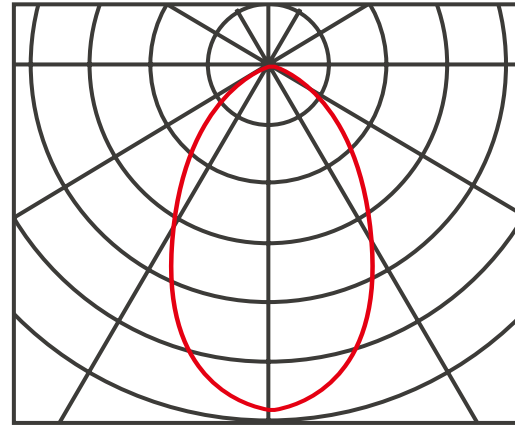

# Technical Drawing

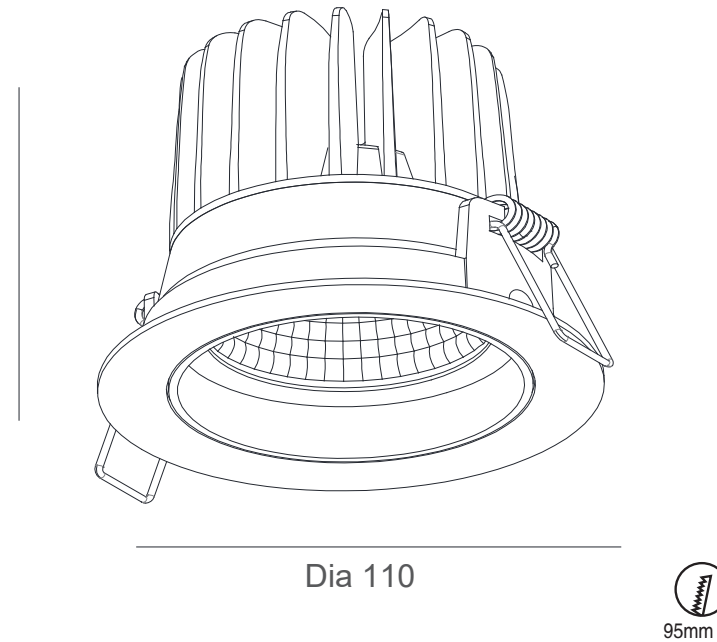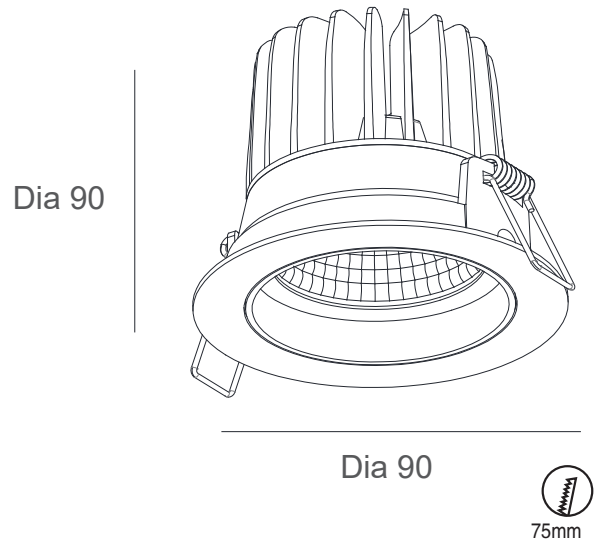

## Accessories



7W / 9W / 11W

12W / 15W / 20W / 25W

Spread Tempered Glass

Unit :mm