

UGR
<19

CB

IP54

0-10V

DMX

DALI




E
Emergency Light

FIRE
RETARDANT



DRIZO F & W

75~200mm IP54

F-Series

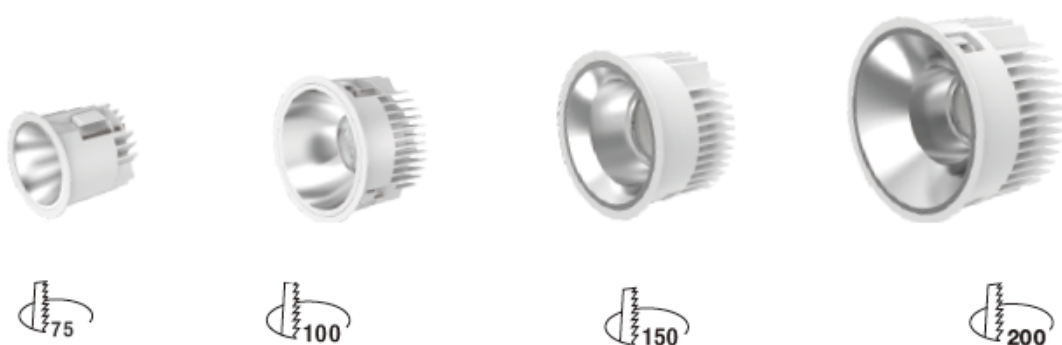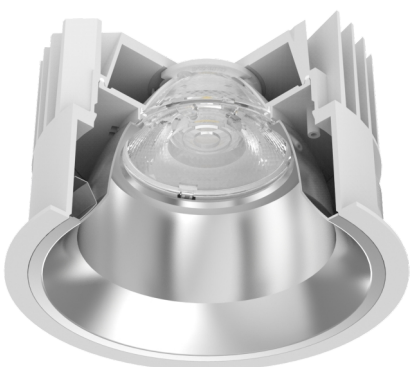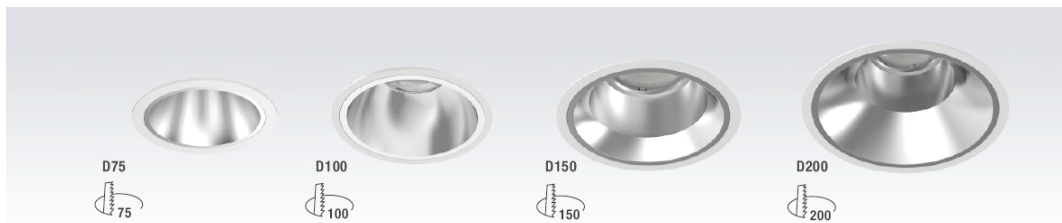

W-Series

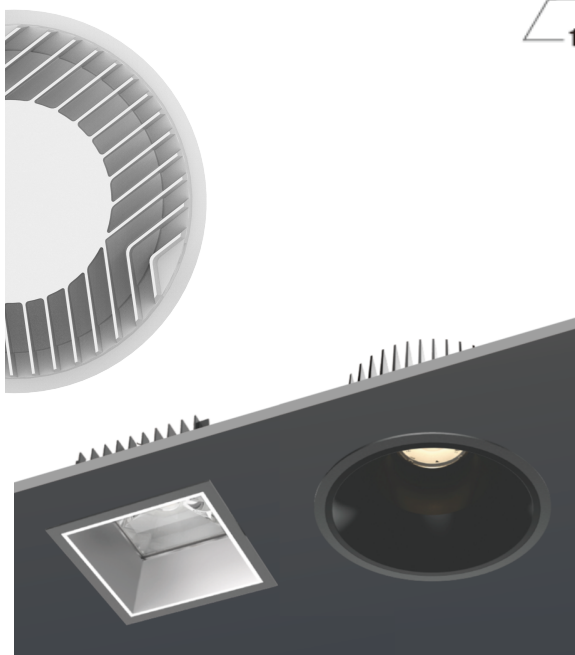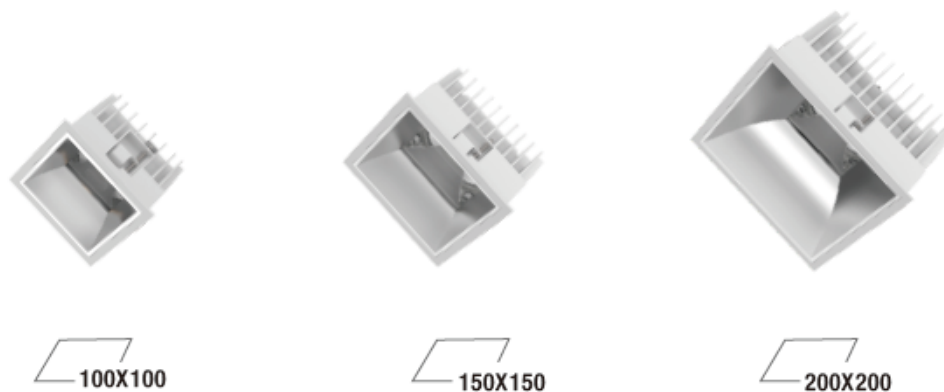

LED RECESSED LOW GLARE DOWN LIGHT. Housing: die-cast aluminium with PMMA Lens and anti-glare reflector to achieve UGR< 19. Deep recessed design achieves super eye comfort. Optimal lens technologies with narrow, medium and flood beam angles. Materials is complied with Hot Wire Testing: 850°C: The blue light risk group: (RG0) under IEC TR 62778 & IEC 62471 testing





Technical Data

Luminaire Type-安裝方式Tipo de luminaria	Recessed Mount Type嵌入式筒燈Empotrada Tipo Mount			
Dimension-尺寸-Dimensión Cut off Dimension-開孔尺寸-Cortar Dimensión	F Series: • Dia 82 x H: 72mm Cut-off: 75mm • Dia 160 x H:100mm Cut-off: 150mm W Series • 110x110xH:79mm Cut-off: 100x100mm • 220x220x H:132mm Cut-off: 200x200mm			
Input Voltage-輸入電壓-Voltaje de entrada	AC100-240V 50/60HZ			
Power Consumption Max-燈具功率 Consumo de energía Max	F Series: • 5W @ Dia 82 x H: 72mm • 9W @ Dia 82 x H: 72mm • 7W @ Dia 110 x H: 79mm • 13W @ Dia 110 x H: 79mm • 17W @ Dia 160 x H:100mm • 24W @ Dia 160 x H:100mm • 28W @ Dia 218 x H:132mm • 35W @ Dia 218 x H:132mm • 44W @ Dia 218 x H:132mm • 52W @ Dia 218 x H:132mm W Series • 9W @ 110x110mm • 15W @ 110x110mm • 21W @167x167mm • 27W @167x167mm • 32W @ 220x220mm • 40W @ 220x220mm • 49W @ 220x220mm • 56W @ 220x220mm			
LED Driver Type LED驅動款式 Tipo de controlador LED	Remote-type LED Driver--Constant Current LED Driver: Refer to LED driver specification 請參閱LED驅動器規格 Consulte la especificación de controlador de LED 1. ON/OFF Switch AC 220-240V 50/60HZ 2. ELV Dimming Driver (5-100%) AC 100-120V 50/60HZ or AC 200-240V 50/60HZ 3. 0-10V Dimming Driver AC100-240V 50/60HZ 4. Dali Dimming Driver AC100-240V 50/60HZ 5. Zigbee Wireless Control Driver AC100-270V 50/60HZ 6. DMX Driver AC100-240V 50/60HZ 7. RDM Driver AC100-240V 50/60HZ 8. Emergency Backup >2 hours or >3 hours 應急電池/Copia de seguridad de emergencia			
LED Driver Type LED驅動款式 Tipo de controlador LED Driver	POWER FACTOR : PF>0.9 @ Full Load TOTAL HARMONIC DISTORTION: THD< 20%			
Beam Angle 光束角 /ángulo de haz	18°	30°	60°	75°
Light Source Brand-光源品牌-Fuente de luz de marca	JAPAN CITIZEN COB LED			
"Lumen Maintenance LM-80 Reported by TM-21"@ 25°C	L90(10k) = 50,700 hrs	L80(10k) > 63,500 hrs	L70(10k) > 63,500 hrs	
LED Life-LED壽命-La vida del LED	>60,000 hours			
Color Temperature -色溫 Temperatura del color	2700K / 3000K / 4000K / 5000K / 6000K/ 6500K			
Color Rendering Index-顯色指數 Índice de reproducción cromática	• >80 • >90			
Chromaticity Tolerance (initial Macadam) 色度容差 (初始Macadam) Tolerancia de cromaticidad (Macadam inicial)	Standard Deviation Colour Matching < 3 SDCM 標準偏差配色< 3 SDCM Coincidencia de color estándar Desviación < 3 SDCM			
Luminaire Efficacy燈具效率 La eficacia de la luminaria	110 Lm/w(2700K), 120Lm/w(5000K),	110 Lm/w(3000K), 130 Lm/w(6000K),	120 Lm/w(4000K), 130Lm/w(6500K)	
LED Source Luminous Efficacy LED光源光效 Fuente luminosa LED Eficacia	140 Lm/w(2700K), 150Lm/w(5000K),	140 Lm/w(3000K), 160 Lm/w(6000K),	150 Lm/w(4000K), 160Lm/w(6500K)	
Housing materials-外殼材料 Materiales de la carcasa	Die-cast aluminum and PMMA Lens and Polycarbonate Reflector 壓鑄鋁和PMMA 透鏡和 PC反光杯 Lente de aluminio fundido a presión y PMMA y reflector de policarbonato			
Trim Color-框邊顏色-Estilo Color	Matte white / Matte black 啞光白色 / 啞光黑色 Blanco mate / Matte black			
Reflector Color-反光杯顏色-Reflector color	Matte Silver 啞銀Plata mate Dark Specular 亮黑色Especular oscuro	Black 黑色 Negro	White 白色 Blanco Gold 金色 Oro	
Ingress Protection-防護等級 Protección de ingreso	IP54			
Operating Humidity -工作濕度 Humedad de funcionamiento	0~90%, non-condensing-不結霜 sin condensación			
Operating Temperature Range / 工作溫度範圍 Rango de temperatura de funcionamiento	-30 °C / +50 °C			
Comply Testing Standard 符合測試標準 Cumplir el estándar de prueba	LED Luminaires: IEC/EN 60598-1 ; IEC/EN 60598-2-2 ; IEC/ EN62493 ; IEC/EN 62301 ; IEC TR 62778 & IEC 62471 (RG0) LED Driver: EN 55015 / IEC 61000-3-2 / IEC 61347-1 / IEC 61347-2-13 / IEC 61547			
Certification-認證-Certificación				


Beam Angle

DIMON
TECHNOLOGY

F-Series




W-Series




Technical Drawing

F Series :

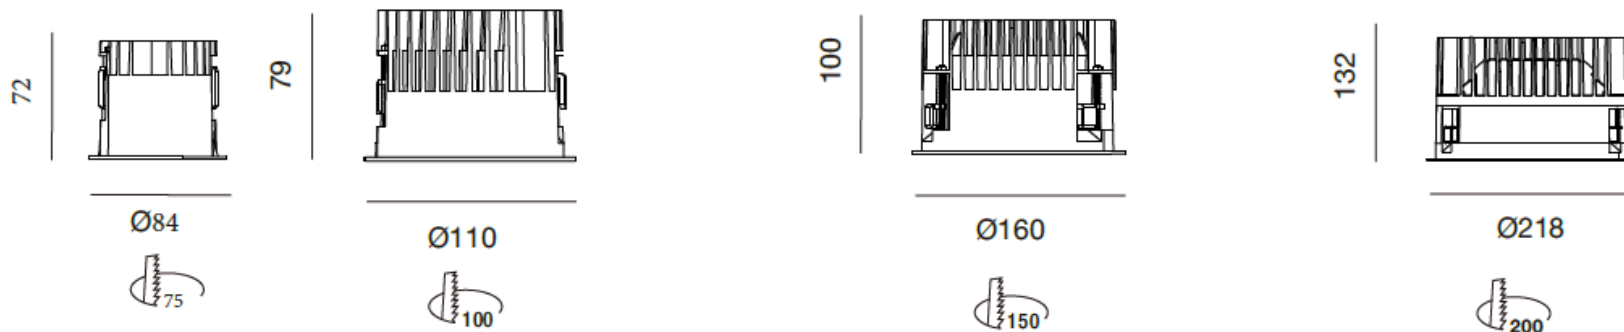

W-Series :

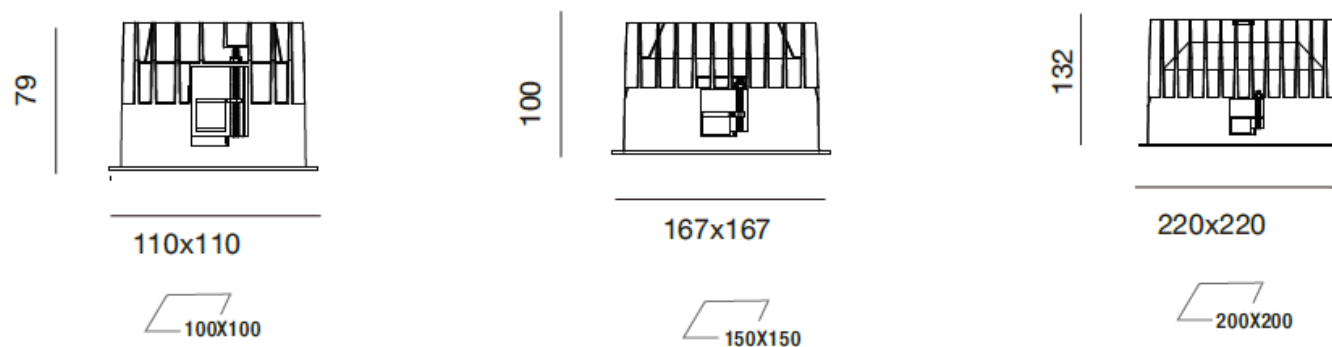


Interchangeable reflector :






Our Design-DRIZO-W Series

DIMON
TECHNOLOGY

CB IP54 UGR <19



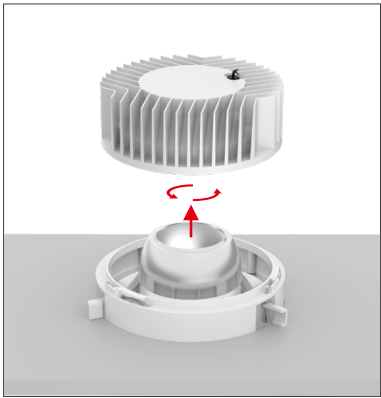


easy maintenance.

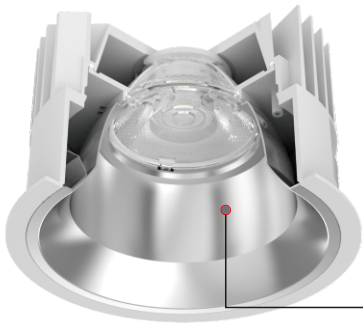

Our Design-DRIZO-W Series

CB IP54 UGR <19

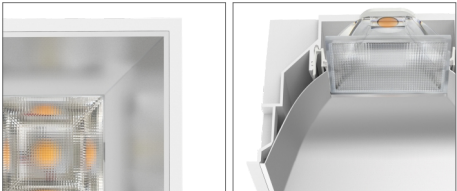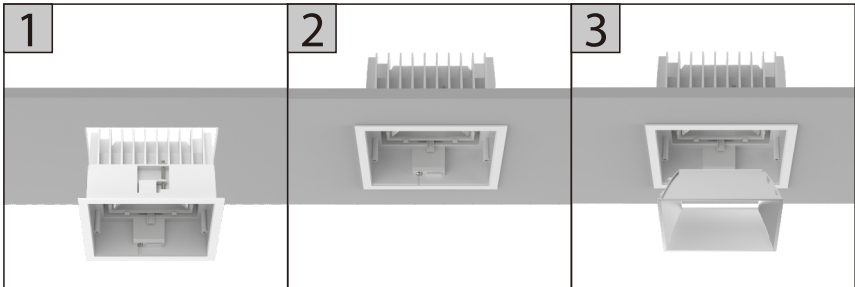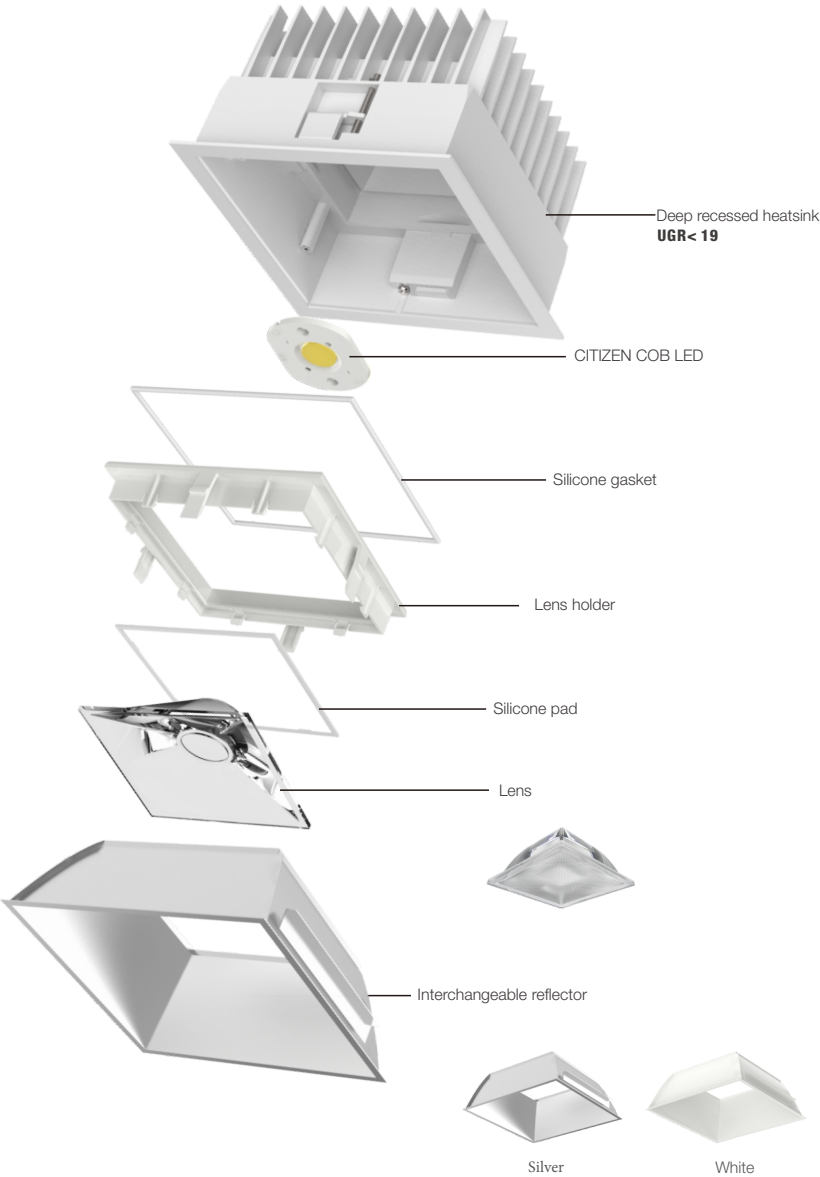

- Focus on every detail
- Low glare for optimal eye comfort

