

DRYCON

SQ380xH90mm 34W Max

CB



CE

IP20



0-10V

ZigBee®

DALI



LED CEILING LIGHT. Housing: Aluminium base with vandal resistant Polycarbonate in opal diffuser. LED module: LM-80 performance approval >50,000 hours. Integrated-Type ELV, 0-10V, DALI, DMX and RDM LED constant current control gear. Applications: carpark, hotels, restaurants, schools, dormitory, supermarkets, shopping malls, commercial buildings.

Technical Data

Luminaire Type-安裝方式-Tipo de luminaria	Ceiling Mount Type 吸頂安裝 Tipo mount en el techo
Dimension-尺寸-Dimensión	• W: 380 x L: 380 x H: 90 mm
QTY of LEDs-燈珠數量-CANT de LEDs	SMD LEDs
Input Voltage-輸入電壓-Voltaje de entrada	AC220-240V 50/60HZ
Power Consumption Max-燈具功率 Consumo de energía Max	• 22W • 30W • 34W
LED Driver Type LED驅動款式 Tipo de controlador LED	Integrated-type LED Driver --Refer to LED driver specification 請參閱LED驅動器規格 Consulte la especificación de controlador de LED 1. ON/OFF Switch AC220-240V 50/60HZ 2. ELV Dimming Driver (5-100%) AC 100-120V 50/60Hz or AC 200-240V 50/60HZ 3. 0-10V Dimming Driver AC100-240V 50/60HZ 4. Dali Dimming Driver AC100-240V 50/60HZ 5. DMX Driver AC100-240V 50/60HZ 6. RDM Driver AC100-240V 50/60HZ 7. Emergency Backup >2 hours or >3 hours @ < 24 charger hours 應急電池/Copia de seguridad de emergencia
LED Driver Features-驅動特性 Funciones del controlador de LED	POWER FACTOR : PF>0.90 @ Full Load TOTAL HARMONIC DISTORTION: THD< 20%
Control Protocol-控制協議 Protocolo de Control	0-10V / Dali / DMX 512 / RDM / ZIGBEE Wireless Control
Beam Angle光束角ángulo de haz	120°
Light Source Brand-光源品牌-Fuente de luz de marca	SAMSUNG - (Photobiological safety-IEC 62471 'Risk Group 1' (low risk))
"Lumen Maintenance LM-80 Reported by TM-21"	• L70(10k) > 60,000 hrs
LED Life-LED壽命-La vida del LED	>60,000 hours
Color Temperature -色溫 Temperatura del color	2700K / 3000K / 4000K / 5000K / 6500K
Color Rendering Index-顯色指數 Índice de reproducción cromática	> 80
MacAdam Ellipses Binning 麥克亞當橢圓分級 Mac Adam binning elipse	Standard Deviation Colour Matching < 3 SDCM 標準偏差配色 < 3 SDCM Coincidencia de color estándar Desviación < 3 SDCM
Photobiological safety-IEC 62471 / of Luminaire 光生物安全檢驗(IEC/EN 62471) 結果: Seguridad fotobiológica-IEC 62471	• Exempt (Risk Group 0; RG0) • 豁免(無危險) • Eximir
Luminaire Efficacy燈具效率 La eficacia de la luminaria	• 95 Lm/w(2700K), 95 Lm/w(3000K), 105 Lm/w(4000K), • 110 Lm/w(5000K), 110 Lm/w(6500K),
LED Source Luminous EfficacyLED光源光效 Fuente luminosa LED Eficacia	• 135 Lm/w(2700K), 135 Lm/w(3000K), 145 Lm/w(4000K), • 150 Lm/w(5000K), 150 Lm/w(6500K),
Housing materials-外殼材料 Materiales de la carcasa	Aluminium and Polycarbonate 鋁和聚碳酸酯 Aluminio fundido a presión y policarbonato
Operating Temperature Range / 工作溫度範圍 Rango de temperatura de funcion amiento	-30 °C / +50 °C
Operating Humidity -工作濕度 Humedad de funcionamiento	0~90%, non-condensing-不結霜 sin condensación
Ingress Protection-防護等級 Protección de ingreso	IP20 - (IEC 60529)
Comply Testing Standard 符合測試標準 Cumplir el estándar de prueba	LED Luminaires: IEC/EN60598-1 ; EN60598-2-1 ; IEC/EN 62031 ; IEC/EN 62493; IEC TR62778 ; IEC62471; RoHS LED Driver: EN 55015 / EN 61000-3-2 / EN 61347-1 / EN 61347-2-13 / EN 61547 / EN 62384
Certification-認證-Certificación	       

Project	Fixture#	Date
		Firm



Ordering Information

Choose the option that suits your need and write its corresponding code on the appropriate line to form the product code.

Example product code: [DRYCON-34W](#)


DRYCON - -


POWER
CONSUMPTION

POWER CONSUMPTION	
Code	Description
22W	22W
30W	30W
34W	34W

BEAM ANGLE

DIMON
TECHNOLOGY

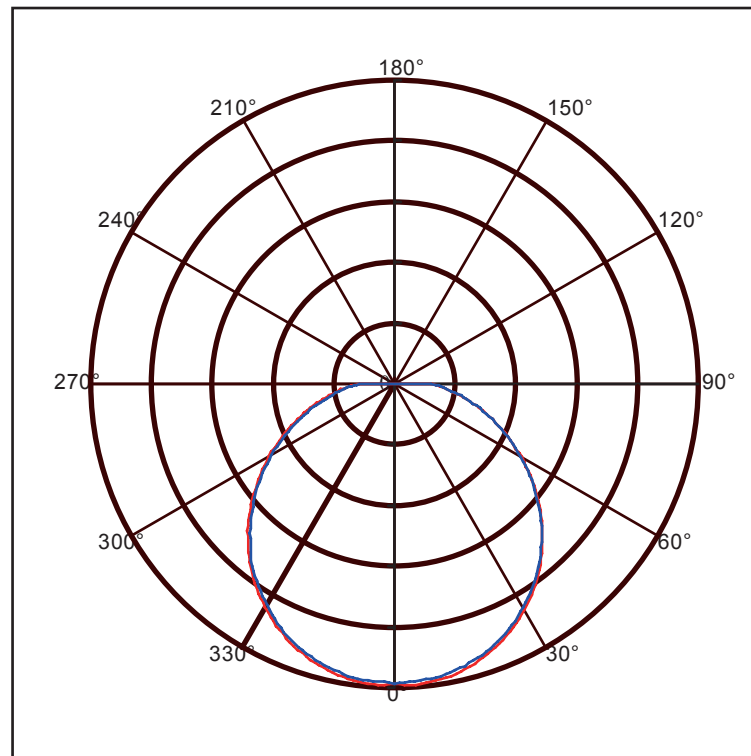

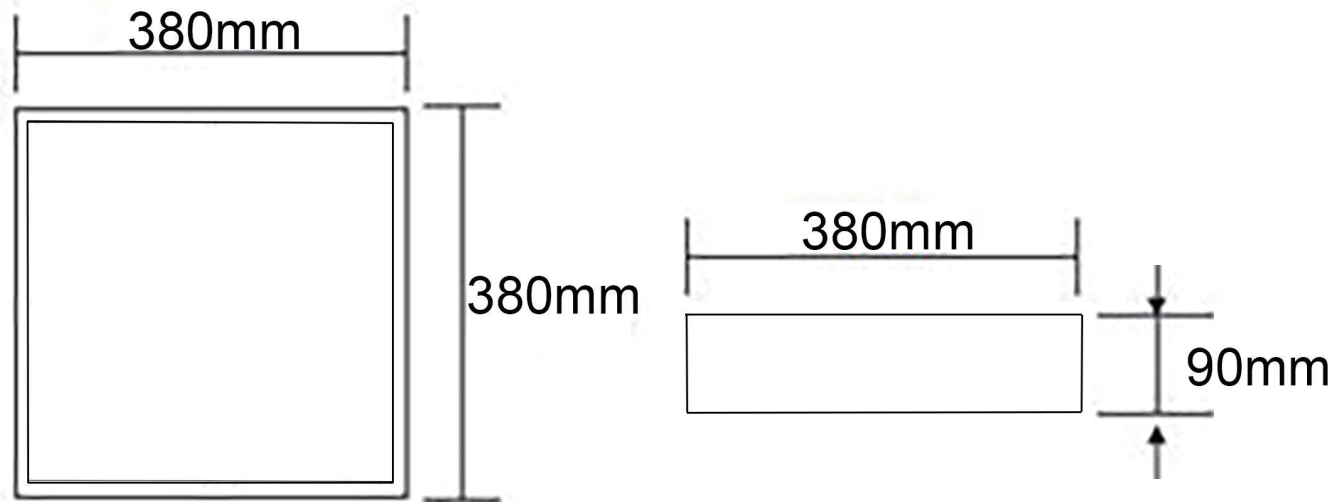

Unit: mm