

DUMBER-12W

Max 12W IP20




LED track light. Housing: die-cast aluminium, powder-coated, designed as heat sink. and PMMA. optical Lens . UGR <22 Integrated-Type driver.

DUMBER-12W

Max 12W IP20

DIMON
TECHNOLOGY

Technical Data

Luminaire Type-安裝方式Tipo de luminaria	Track Mounted Type 軌道燈具 Tipo de huella Montado		
Dimension-尺寸-Dimensión	Dia 52 x L 134 mm		
QTY of LEDs-燈珠數量-CANT de LEDs	1 pcs CREE LED Array		
Input Voltage-輸入電壓-Voltaje de entrada	AC220-240V 50/60HZ		
Power Consumption Max-燈具功率 Consumo de energía Max	• 9W • 12W		
LED Driver Type LED驅動款式 Tipo de controlador LED	Integrated-type or Remote-type LED Driver--Refer to LED driver specification 請參閱LED驅動器規格 Consulte la especificación de controlador de LED 1. ON/OFF Switch AC220-240V 50/60HZ 2. Dali Dimming Driver AC220-240V 50/60HZ		
LED Driver Features驅動特性 Funciones del controlador de LED	POWER FACTOR : PF>0.90 @ Full Load TOTAL HARMONIC DISTORTION: THD< 20%		
Beam Angle光束角ángulo de haz	12° 15° 20° 24° 30° 33° 38° 50°		
Light Source Brand-光源品牌-Fuente de luz de marca	CREE - (Photobiological safety-IEC 62471 'Risk Group 1' (low risk))		
"Lumen Maintenance LM-80 Reported by TM-21"	L70(10k) > 60000 hrs		
LED Life-LED壽命-La vida del LED	>60,000 hours		
Color Temperature -色溫 Temperatura del color	2700K / 3000K / 4000K / 5000K / 6500K		
Color Rendering Index-顯色指數 Índice de reproducción cromática	• >80 • >90		
MacAdam Ellipses Binning 麥克亞當橢圓分級 Mac Adam binning ellipse	Standard Deviation Colour Matching < 3 SDCM 標準偏差配色 < 3 SDCM Coincidencia de color estándar Desviación < 3 SDCM		
Luminaire Efficacy 燈具效率 La eficacia de la luminaria	100 Lm/w(2700K), 120 Lm/w(5000K),	110 Lm/w(3000K), 120 Lm/w(6500K),	120 Lm/w(4000K),
LED Source Luminous Efficacy LED光源光效 Fuente luminosa LED Eficacia	130 Lm/w(2700K), 140 Lm/w(5000K),	130 Lm/w(3000K), 140 Lm/w(6500K),	140 Lm/w(4000K),
Housing materials-外殼材料 Materiales de la carcasa	Die-cast aluminum and acrylic 壓鑄鋁和亞克力 Fundición de aluminio y acrílico		
Housing Color 外殼顏色 color de la carcasa	Powder Coating : Matte white / Matte black 粉末塗料: 啞光白色 / 啞光黑色 Recubrimiento en Polvo: Blanco mate / Matte black		
Ingress Protection-防護等級 Protección de ingreso	IP20 - (IEC 60529)		
Operating Humidity -工作濕度 Humedad de funcionamiento	0~90%, non-condensing-不結霜 sin condensación		
Operating Temperature Range / 工作溫度範圍 Rango de temperatura de funcionamiento	-30 °C / +50 °C		
Comply Testing Standard 符合測試標準 Cumplir el estándar de prueba	LED Luminaires: IEC 60598-1 / IEC 60598-2-1 LED Driver: EN 55015 / IEC 61000-3-2 / IEC 61347-1 / IEC 61347-2-13 / IEC 61547 / IEC62384		
Certification-認證-Certificación	   		

Project	Fixture#	Date
		Firm



Ordering Information


Choose the option that suits your need and write its corresponding code on the appropriate line to form the product code.


Example product code: [DUMBER-12W](#)

DUMBER-12W - - Power Consumption

Power Consumption	
Code	Description
9W	9W
12W	12W

BEAM ANGLE

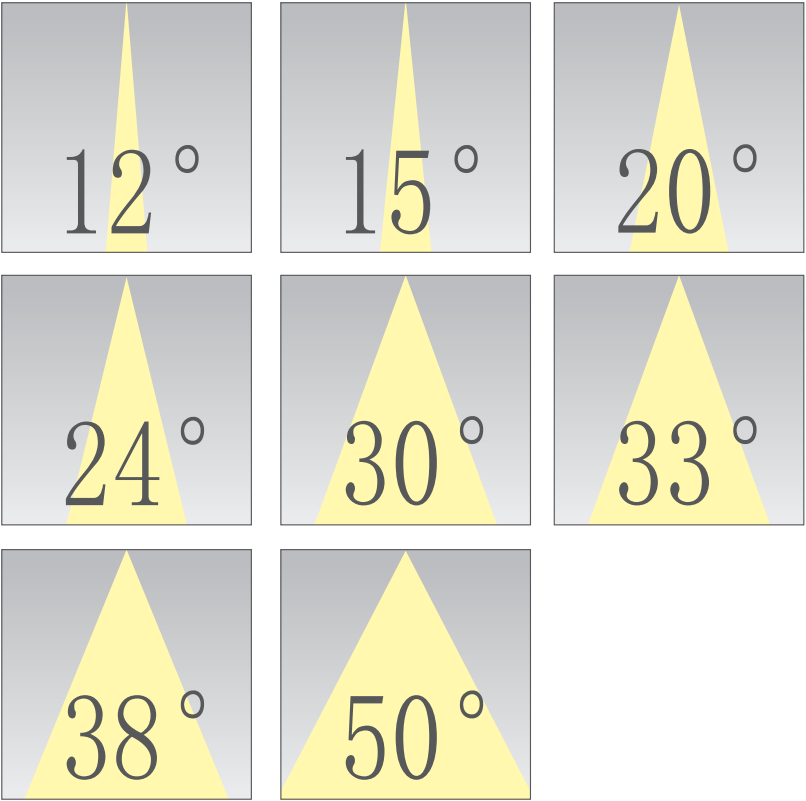


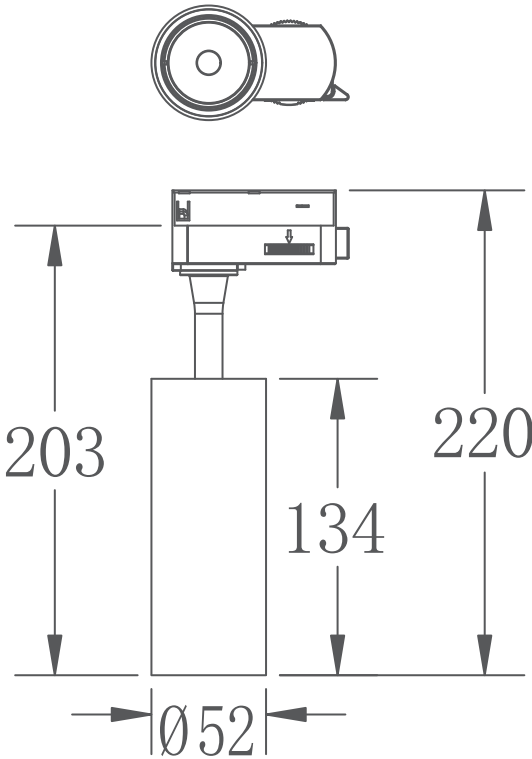

Track Connector



2-phase

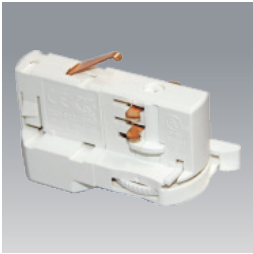

3-phase

Unit: mm