


DYNOMA

Dia 152 x H: 200mm



CB



Black

White









Matt

LED RECESSED LOW GLARE DOWN LIGHT. Housing: die-cast aluminium with PMMA Lens and anti-glare reflector to achieve UGR< 19. Deep recessed design achieves super eye comfort. Optimal lens technologies with narrow, medium and flood beam angles. Materials is complied with Hot Wire Testing: 850°C: The blue light risk group: (RG0)

Technical Data

Luminaire Type-安裝方式Tipo de luminaria

Surface Mounted Type明裝式燈具Superficie Tipo Montado

Dimension-尺寸-Dimensión	Dia 152 x H: 200mm		
Input Voltage-輸入電壓-Voltaje de entrada	AC100-240V 50/60HZ		
Power Consumption Max-燈具功率 Consumo de energía Max	<ul style="list-style-type: none"> • 20W • 25W • 30W 		
LED Driver Type LED驅動款式 Tipo de controlador LED	Remote-type LED Driver--Constant Current LED Driver: Refer to LED driver specification 請參閱LED驅動器規格 Consulte la especificación de controlador de LED 1. ON/OFF Switch AC 220-240V 50/60HZ 2. ELV Dimming Driver (5-100%) AC 100-120V 50/60HZ or AC 200-240V 50/60HZ 3. 0-10V Dimming Driver AC100-240V 50/60HZ 4. Dali Dimming Driver AC100-240V 50/60HZ 5. Zigbee Wireless Control Driver AC100-270V 50/60HZ 6. DMX Driver AC100-240V 50/60HZ 7. RDM Driver AC100-240V 50/60HZ 8. Emergency Backup >2 hours or >3 hours 應急電池/Copia de seguridad de emergencia		
LED Driver Type LED驅動款式 Tipo de controlador LED Driver	POWER FACTOR : PF>0.9 @ Full Load 20%	TOTAL HARMONIC DISTORTION: THD< 20%	
Beam Angle 光束角 /ángulo de haz	30°	60°	
Light Source Brand-光源品牌-Fuente de luz de marca	JAPAN CITIZEN COB LED		
"Lumen Maintenance LM-80 Reported by TM-21"@ 25°C	L70(10k) > 60,000 hrs		
LED Life-LED壽命-La vida del LED	>60,000 hours		
Color Temperature -色溫 Temperatura del color	2700K / 3000K / 4000K / 5000K / 6000K/ 6500K		
Color Rendering Index-顯色指數 Índice de reproducción cromática	<ul style="list-style-type: none"> • >80 • >90 		
Chromaticity Tolerance (initial Macadam) 色度容差 (初始Macadam) Tolerancia de cromaticidad (Macadam inicial)	Standard Deviation Colour Matching < 3 SDCM 標準偏差配色 < 3 SDCM Coincidencia de color estándar Desviación < 3 SDCM		
Luminaire Efficacy燈具效率 La eficacia de la luminaria	110 Lm/w(2700K), 120Lm/w(5000K),	110 Lm/w(3000K), 130 Lm/w(6000K),	120 Lm/w(4000K), 130Lm/w(6500K)
LED Source Luminous Efficacy LED光源光效 Fuente luminosa LED Eficacia	140 Lm/w(2700K), 150Lm/w(5000K),	140 Lm/w(3000K), 160 Lm/w(6000K),	150 Lm/w(4000K), 160Lm/w(6500K)
Housing materials-外殼材料 Materiales de la carcasa	Die-cast aluminum and PMMA Lens and Polycarbonate Reflector 壓鑄鋁和PMMA 透鏡和 PC反光杯 Lente de aluminio fundido a presión y PMMA y reflector de policarbonato		
Body and Trim Color-燈體和框邊顏色 Color de cuerpo y moldura	Matte white / Matte black / Matte Grey 啞光白/啞光黑/啞光灰 Blanco mate / Negro mate / Gris mate		
Reflector Color-反光杯顏色-Reflector color	Matte Silver 啞銀Plata mate	Black 黑色 Negro	White 白色 Blanco
Ingress Protection-防護等級 Protección de ingreso	IP20		
Operating Humidity -工作濕度 Humedad de funcionamiento	0~90%, non-condensing-不結霜 sin condensación		
Operating Temperature Range / 工作溫度範圍 Rango de temperatura de funcionamiento	-30 °C / +50 °C		
Comply Testing Standard 符合測試標準 Cumplir el estándar de prueba	LED Luminaires: IEC/EN 60598-1 ; IEC/EN 60598-2-2 ; IEC/ EN62493 ; IEC/EN 62301 ; IEC TR 62778 & IEC 62471 (RG0) LED Driver: EN 55015 / IEC 61000-3-2 / IEC 61347-1 / IEC 61347-2-13 / IEC 61547		
Certification-認證-Certificación	       		

Project	Fixture#	Date
		Firm



Ordering Information



Choose the option that suits your need and write its corresponding code on the appropriate line to form the product code.

Example product code: [DYNOMA-30](#)


DYNOMA - - _____
[Power Consumption](#)

Power Consumption	
Code	Description
20W	20W
25W	25W
30W	30W

BEAM ANGLE

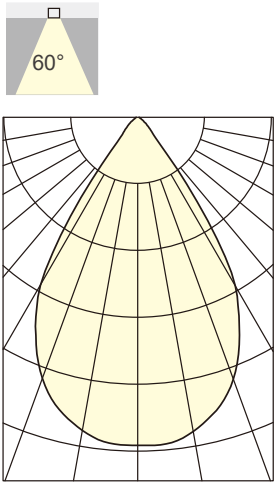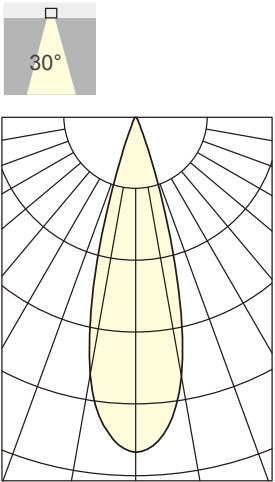

Technical Drawing

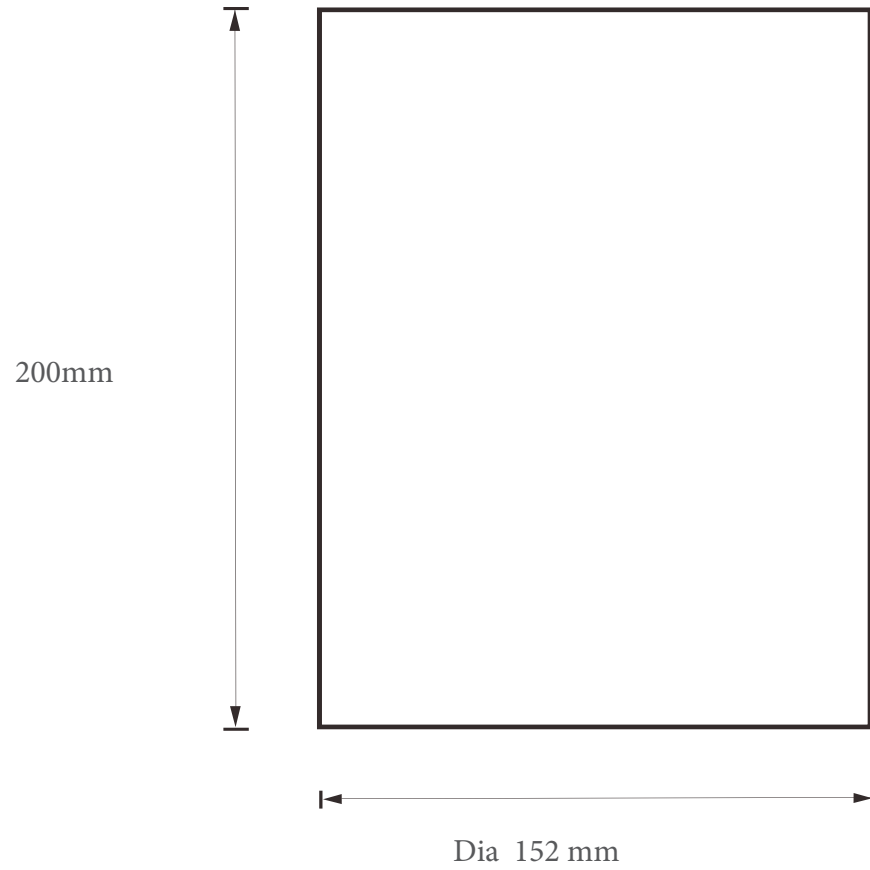

Reflector Color :



Black

White

Matt