

## ENALA-N&S

2W-6W Classic filament LED candles







Type A



Type B

- LED Candles offer energy saving ambiance with the elegant effect of incandescent candles.
- These designs provides light in an omnidirectional manner,
- They deliver beautiful, decorative warm-white light while saving around 90% on energy costs compared with traditional light bulbs
- UV- and IR-free light

## Technical Data

|   |  |
|---|--|
| Cap-Base燈座Tapa-Base   | E27  |
| Dimension-尺寸-Dimensión  | <ul style="list-style-type: none"> <li>• Type A: Dia 35 x H : 100mm</li> <li>• Type B: Dia 35 x H : 125mm</li> </ul>   |
| Power Consumption Max-燈具功率<br>Consumo de energía Max  | <ul style="list-style-type: none"> <li>• 2W</li> <li>• 4W</li> <li>• 6W</li> </ul>   |
| Input Voltage-輸入電壓-Voltaje de entrada<br>POWER FACTOR功率因數<br>FACTOR DE POTENCIA                             | AC220-240V 50/60HZ<br>>0.5   |
| Switching Cycle開關週期<br>Ciclo de conmutación   | > 20,000 times   |
| Controls and dimming控制 and 調光<br>Controles y atenuación   | Non-Dimmable非調光 Sin atenuación<br>or<br>Dimmable- Leading Edge Triac Dimming前沿可控矽調光Atenuación triac de vanguardia  |
| Beam Angle光束角ángulo de haz  | 360°   |
| Nominal Lifetime (Nom)壽命-La vida  | > 35,000hours  |
| Color Temperature -色溫<br>Temperatura del color  | <ul style="list-style-type: none"> <li>• 2200K</li> <li>• 2700K</li> <li>• 3000K</li> <li>• 4000K</li> <li>• 5000K</li> </ul>  |
| Color Rendering Index-顯色指數<br>Índice de reproducción cromática  | <ul style="list-style-type: none"> <li>&gt; 80</li> <li>&gt; 90</li> </ul>   |
| MacAdam Ellipses Binning<br>麥克亞當橢圓分級<br>Mac Adam binning elipse   | Standard Deviation Colour Matching < 6 SCDM<br>標準偏差配色 < 6 SCDM<br>Coincidencia de color estándar Desviación  |
| Luminaire Efficacy燈具效率<br>La eficacia de la luminaria   | <ul style="list-style-type: none"> <li>• 90lm/w(2200K)</li> <li>• 90lm/w(2700K),</li> <li>• 90lm/w(3000K),</li> <li>• 100lm/w(4000K),</li> <li>• 110lm/w(5000K),</li> </ul>  |
| LLMF At End Of Nominal Lifetime (Nom)<br>額定壽命結束時的 LLMF (Nom)<br>LLMF al final de la vida útil nominal (Nom) | L70>35,000hours  |
| Housing materials-外殼材料<br>Materiales de la carcasa  | Glass 玻璃Vidrio   |
| Housing Color外殼顏色<br>color de la carcasa  | <ul style="list-style-type: none"> <li>• Amber Glass 琥珀色玻璃Vidrio ámbar</li> <li>• Clear Glass透明玻璃 Vidrio transparente</li> <li>• Milky Glass 乳白色玻璃 Vidrio lechoso</li> <li>• Frosted Glass 磨砂玻璃Vidrio esmerilado</li> </ul>  |
| Ingress Protection-防護等級<br>Protección de ingreso  | IP20   |
| Operating Temperature Range / 工作溫度範圍<br>Rango de temperatura de funcionamiento                              | -30 °C To +50 °C   |
| Comply Testing Standard 符合測試標準<br>Cumplir el estándar de prueba   | LED Luminaires:IEC 62560 ;IEC 62493;IEC/TR 62778 IEC62471;RoHS<br>LED Driver: EN 55015 / EN 61000-3-2 / EN 61347-1 / EN 61347-2-13 / EN 61547  |
| Certification-認證-Certificación  |     |

|         |          |      |
|---------|----------|------|
| Project | Fixture# | Date |
|         |          | Firm |



## Ordering Information

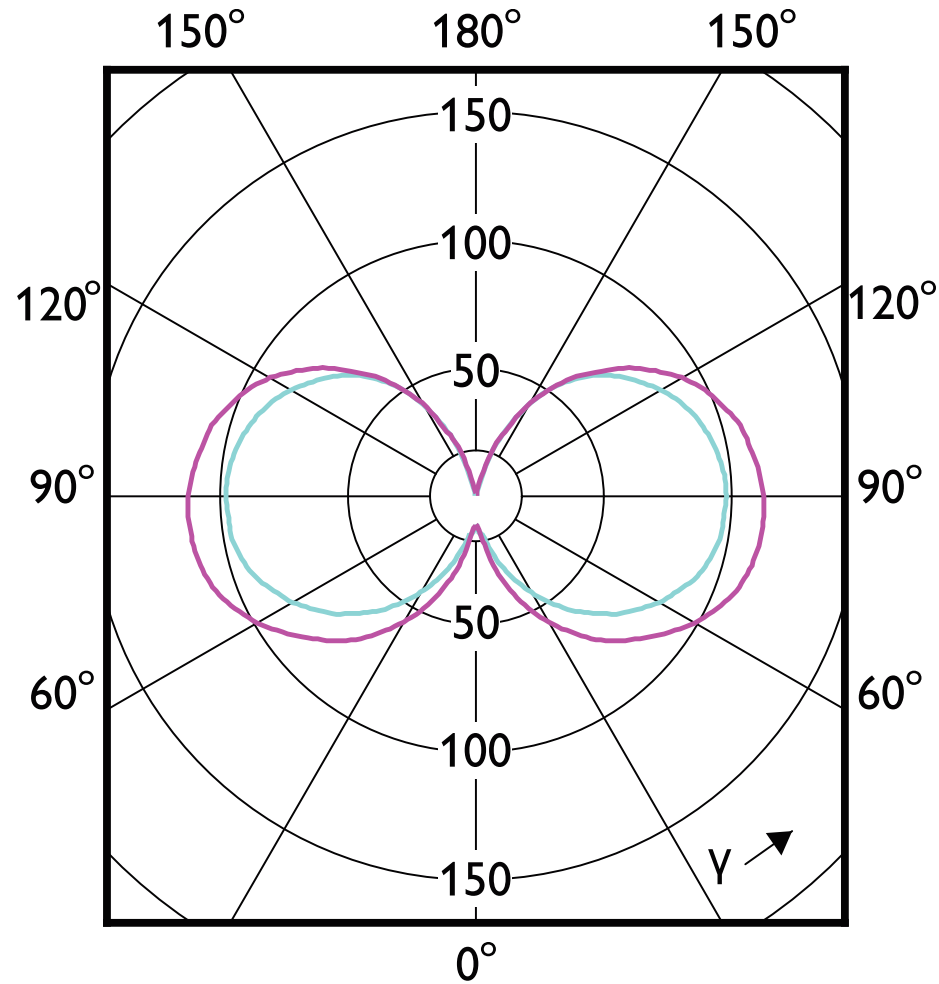
Choose the option that suits your need and write its corresponding code on the appropriate line to form the product code.

Example product code: [ENALA-N](#)

ENALA- - - \_\_\_\_\_  
Power Consumption

| Power Consumption |             |
|-------------------|-------------|
| Code              | Description |
| X                 | 2W          |
| N                 | 4W          |
| S                 | 6W          |

# BEAM ANGLE



Unit: mm

Technical Drawing



Unit: mm